

6.0mm Square Type (Snap-in) SKEG Series

Top push type

Part number	SKEGADA010	
Type	Snap-in	
Operating force	0.78N	
Operating direction	Top push	
Travel	1mm	
Operating life (1mA 5V DC)	100,000 cycles	
Initial contact resistance	1kΩ max.	
Stem color	Ivory	
Stem	Flat stem	
Series type	Soft feeling type	
Operating temperature range	-20℃ to +70℃	
Rating (max.)	5mA 12V DC	
Rating (min.)	10μA 1V DC	
Electrical performance	Insulation resistance	100MΩmin. 100V DC for 1min.
	Voltage proof	250V AC for 1 min.
Durability	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively
Environmental performance	Cold	-30±2℃ for 96h
	Dry heat	80±2℃ for 96h

Damp heat

60±2℃, 90 to 95%RH for 96h

Minimum order unit Japan
(pcs.)

1,000


Export

1,000


Photo Stem color : Ivory



Dimensions

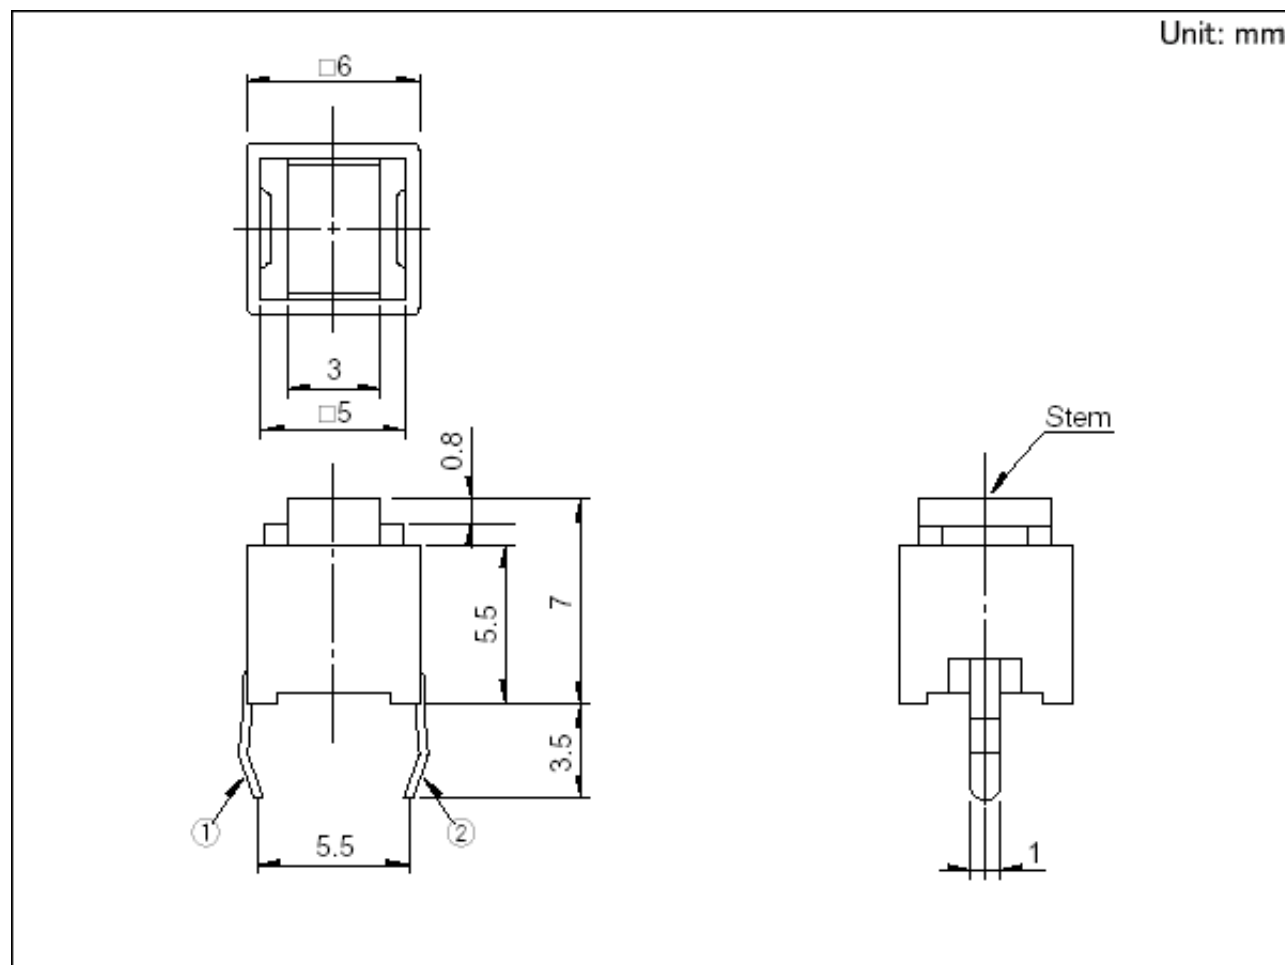


Mounting Hole Dimensions

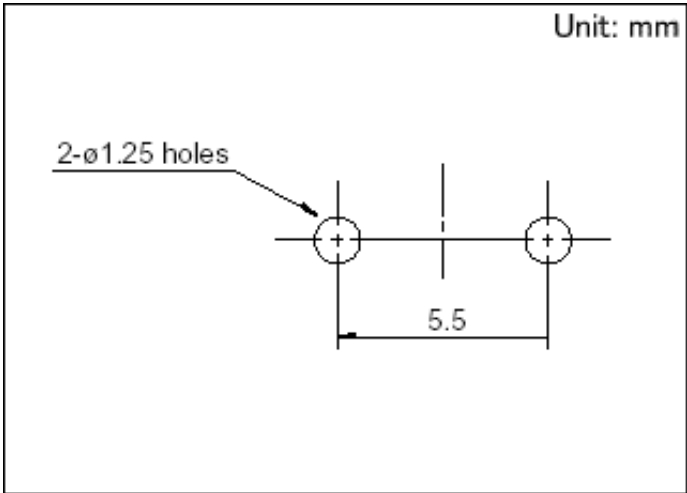

Viewed from mounting face.

Circuit Diagram

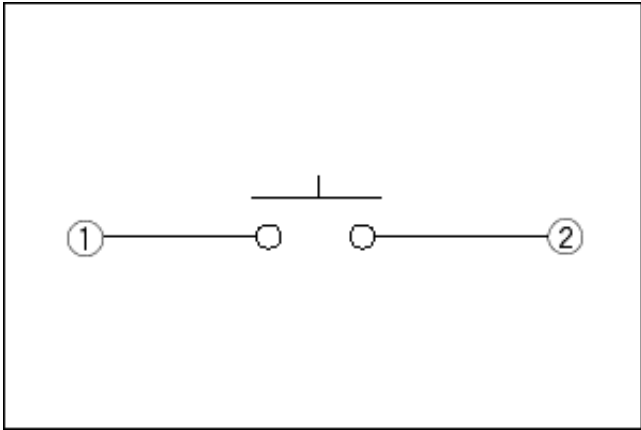

Packing Specifications

Bulk		
Number of packages (pcs.)	1 case / Japan	10,000
	1 case / export packing	30,000
Export package measurements (mm)		309×476×347

Soldering Conditions

Conditions for Auto-dip	
Items	Condition
Flux built-up	Mounting surface should not be exposed to flux

Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	45s max.
Soldering temperature	255°C max.
Duration of immersion	5s max.
Number of soldering	2 times max.

Manual Soldering

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	20W max.

1. Consult with us for availability of TACT switch™ washing.
2. Prevent flux penetration from the top side of the TACT switch™.
3. Switch terminals and a PC board should not be coated with flux prior to soldering.
4. The second soldering should be done after the switch returns to normal temperature.
5. Use the flux with a specific gravity of at least 0.81.
(EC-19s-8 by TAMURA Corporation, or their equivalents.)

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please use 1.6mm thick PC boards. (For horizontal type, 1.0mm)
3. Please place purchase orders per minimum order unit (integer).
4. This products can be used in vehicles.
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.