

# 3.3V Dual LVTTTL/LVCMOS to Differential LVPECL Translator

## MC100LVELT22

### Description

The MC100LVELT22 is a dual LVTTTL/LVCMOS to differential LVPECL translator. Due to LVPECL (Low Voltage Positive ECL) levels, only +3.3V and ground is required. The small 8-lead package outline with low skew dual gate design makes the MC100LVELT22 ideal for applications which require translation of a clock and/or data signal.

### Features

- 350 ps Typical Propagation Delay
- <100 ps Output-to-Output Skew
- Flow Through Pinouts
- The 100 Series Contains Temperature Compensation
- LVPECL Operating Range:  $V_{CC} = 3.15\text{ V}$  to  $3.45\text{ V}$  with  $GND = 0\text{ V}$
- When Unused TTL Input is left Open, Q Output will Default High
- These are Pb-Free Devices




SOIC-8  
D SUFFIX  
CASE 751



TSSOP-8  
DT SUFFIX  
CASE 948R

### MARKING DIAGRAM



A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
M = Date Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*For additional marking information, refer to Application Note [AND8002/D](#).

### ORDERING INFORMATION

| Device           | Package              | Shipping†        |
|------------------|----------------------|------------------|
| MC100LVELT22DG   | SOIC-8<br>(Pb-Free)  | 98 Units / Tube  |
| MC100LVELT22DR2G | SOIC-8<br>(Pb-Free)  | 2500Tape & Reel  |
| MC100LVELT22DTG  | TSSOP-8<br>(Pb-Free) | 100 Units / Tube |
| MC100LVELT22DTRG | TSSOP-8<br>(Pb-Free) | 2500 Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).

## MC100LVELT22

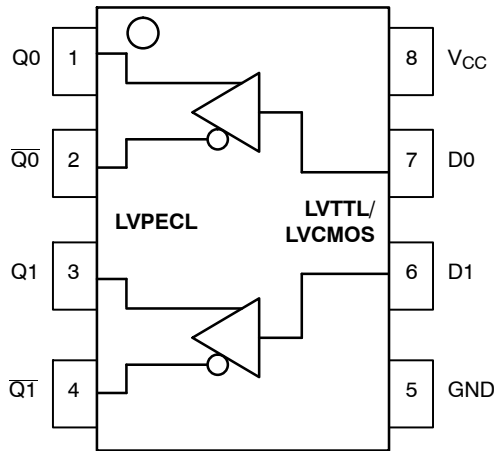


Table 1. PIN DESCRIPTION

| PIN                   | FUNCTION                    |
|-----------------------|-----------------------------|
| $Q_n, \overline{Q_n}$ | LVPECL Differential Outputs |
| D0, D1                | LVTTTL/LVCMOS Inputs        |
| $V_{CC}$              | Positive Supply             |
| GND                   | Ground                      |

Figure 1. 8-Lead Pinout (Top View) and Logic Diagram

Table 2. ATTRIBUTES

| Characteristics                                                                    | Value                |
|------------------------------------------------------------------------------------|----------------------|
| Internal Input Pulldown Resistor                                                   | N/A                  |
| Internal Input Pullup Resistor                                                     | N/A                  |
| ESD Protection Human Body Model<br>Machine Model                                   | > 4 kV<br>> 200 V    |
| Moisture Sensitivity, Indefinite Time Out of Drypack (Note 1)<br>SOIC-8<br>TSSOP-8 | Level 1<br>Level 3   |
| Flammability Rating Oxygen Index: 28 to 34                                         | UL 94 V-0 @ 0.125 in |
| Transistor Count                                                                   | 164                  |
| Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test                             |                      |

1. For additional information, see Application Note AND8003/D.

Table 3. MAXIMUM RATINGS

| Symbol        | Parameter                                | Condition 1         | Condition 2        | Rating        | Unit         |
|---------------|------------------------------------------|---------------------|--------------------|---------------|--------------|
| $V_{CC}$      | Positive Power Supply                    | GND = 0 V           |                    | 7             | V            |
| $V_I$         | Input Voltage                            | GND = 0 V           | $V_I \leq V_{CC}$  | 7             | V            |
| $I_{out}$     | Output Current                           | Continuous<br>Surge |                    | 50<br>100     | mA<br>mA     |
| $T_A$         | Operating Temperature Range              |                     |                    | -40 to +85    | °C           |
| $T_{stg}$     | Storage Temperature Range                |                     |                    | -65 to +150   | °C           |
| $\theta_{JA}$ | Thermal Resistance (Junction-to-Ambient) | 0 lfpm<br>500 lfpm  | SO-8<br>SO-8       | 190<br>130    | °C/W<br>°C/W |
| $\theta_{JC}$ | Thermal Resistance (Junction-to-Case)    | std bd              | SO-8               | 41 to 44 ± 5% | °C/W         |
| $\theta_{JA}$ | Thermal Resistance (Junction-to-Ambient) | 0 lfpm<br>500 lfpm  | TSSOP-8<br>TSSOP-8 | 185<br>140    | °C/W<br>°C/W |
| $\theta_{JC}$ | Thermal Resistance (Junction-to-Case)    | std bd              | TSSOP-8            | 41 to 44 ± 5% | °C/W         |
| $T_{sol}$     | Wave Solder Pb-Free                      | <2 to 3 sec @ 260°C |                    | 265           | °C           |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. JEDEC standard multilayer board – 2S2P (2 signal, 2 power)

# MC100LVELT22

**Table 4. LVPECL DC CHARACTERISTICS**  $V_{CC} = 3.3 \text{ V}$ ;  $GND = 0.0 \text{ V}$  (Note 3)

| Symbol   | Characteristic               | -40°C |     |      | 25°C |     |      | 85°C |     |      | Unit |
|----------|------------------------------|-------|-----|------|------|-----|------|------|-----|------|------|
|          |                              | Min   | Typ | Max  | Min  | Typ | Max  | Min  | Typ | Max  |      |
| $I_{CC}$ | Power Supply Current         |       |     | 28   |      |     | 28   |      |     | 29   | mA   |
| $V_{OH}$ | Output HIGH Voltage (Note 4) | 2275  |     | 2420 | 2275 |     | 2420 | 2275 |     | 2420 | mV   |
| $V_{OL}$ | Output LOW Voltage (Note 4)  | 1490  |     | 1680 | 1490 |     | 1680 | 1490 |     | 1680 | mV   |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfpm.

3. Output parameters vary 1:1 with  $V_{CC}$ .  $V_{CC}$  can vary  $\pm 0.15 \text{ V}$ .  
 4. Outputs are terminated through a 50 ohm resistor to  $V_{CC} - 2 \text{ V}$ .

**Table 5. LVTTTL/LVCMOS INPUT DC CHARACTERISTICS**  $V_{CC} = 3.3 \text{ V}$ ;  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  (Note 5)

| Symbol    | Characteristic            | Min | Typ | Max  | Unit          | Condition                 |
|-----------|---------------------------|-----|-----|------|---------------|---------------------------|
| $I_{IH}$  | Input HIGH Current        |     |     | 20   | $\mu\text{A}$ | $V_{IN} = 2.7 \text{ V}$  |
| $I_{IHH}$ | Input HIGH Current        |     |     | 100  | $\mu\text{A}$ | $V_{IN} = V_{CC}$         |
| $I_{IL}$  | Input LOW Current         |     |     | -0.2 | mA            | $V_{IN} = 0.5 \text{ V}$  |
| $V_{IK}$  | Input Clamp Diode Voltage |     |     | -1.2 | V             | $I_{IN} = -18 \text{ mA}$ |
| $V_{IH}$  | Input HIGH Voltage        | 2.0 |     | 3.3  | V             |                           |
| $V_{IL}$  | Input LOW Voltage         | 0   |     | 0.8  | V             |                           |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfpm.

5.  $V_{CC}$  can vary  $\pm 0.15 \text{ V}$ .


**Table 6. AC CHARACTERISTICS**  $V_{CC} = 3.3 \text{ V}$ ;  $GND = 0.0 \text{ V}$  (Note 6)

| Symbol          | Characteristic                                                                                           | -40°C |     |            | 25°C |     |            | 85°C |     |            | Unit |
|-----------------|----------------------------------------------------------------------------------------------------------|-------|-----|------------|------|-----|------------|------|-----|------------|------|
|                 |                                                                                                          | Min   | Typ | Max        | Min  | Typ | Max        | Min  | Typ | Max        |      |
| $f_{max}$       | Maximum Toggle Frequency                                                                                 |       |     |            |      | 350 |            |      |     |            | MHz  |
| $t_{PLH}$       | Propagation Delay (Note 7)                                                                               | 200   | 350 | 600        | 200  | 350 | 600        | 200  | 350 | 600        | ps   |
| $t_{skew}$      | Skew<br>Output-to-Output<br>Part-to-Part                                                                 |       | 30  | 100<br>400 |      | 30  | 100<br>400 |      | 30  | 100<br>400 | ps   |
| $t_{JITTER}$    | Random Clock Jitter (RMS)                                                                                |       |     | 2.1        |      | 1.1 | 1.9        |      |     | 1.6        | ps   |
| $t_{jit(\phi)}$ | Additive RMS Phase Jitter<br>$f_c = 50 \text{ MHz}$ , Integration Range: 12 kHz to 20 MHz (See Figure 2) |       |     |            |      | 219 |            |      |     |            | fs   |
| $t_r/t_f$       | Output Rise/Fall Time (20–80%)                                                                           | 200   |     | 550        | 200  |     | 500        | 200  |     | 500        | ps   |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfpm.

6.  $V_{CC}$  can vary  $\pm 0.15 \text{ V}$ . Outputs are terminated through a 50  $\Omega$  resistor to  $V_{CC} - 2 \text{ V}$ .  
 7. Specifications for standard TTL input signal.

## MC100LVELT22

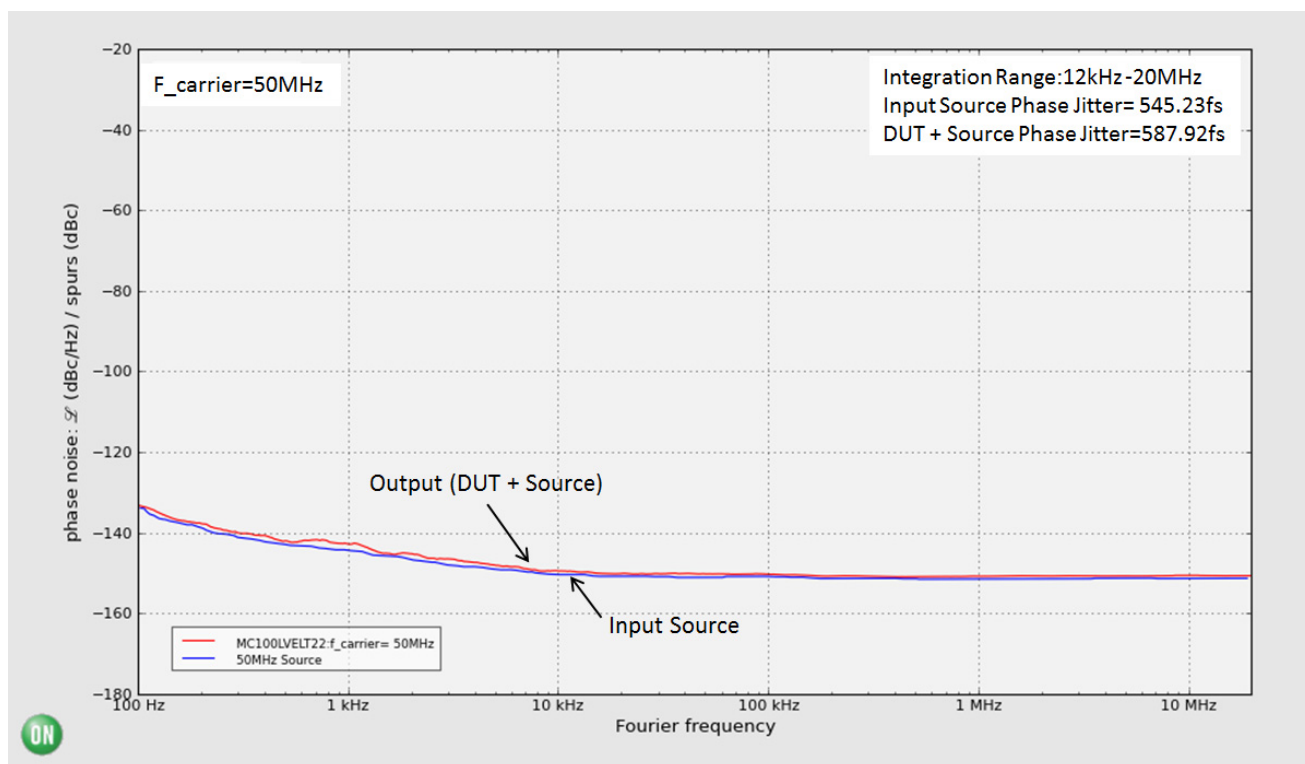

**Figure 2. Typical MC100LVELT22 Phase Noise Plot at  $f_{\text{Carrier}} = 50 \text{ MHz}$ ,  $V_{\text{CC}} = 3.3 \text{ V}$ ,  $25^\circ\text{C}$**

The above phase noise data was captured using Agilent E5052A/B. The data displays the input phase noise and output phase noise used to calculate the additive phase jitter at a specified integration range. The additive RMS phase jitter contributed by the device (integrated between 12 kHz and 20 MHz) is 219 fs. The additive RMS phase jitter performance of the translator is highly dependent on the phase noise of the input source.

To obtain the most precise additive phase noise measurement, it is vital that the source phase noise be

notably lower than that of the DUT. If the phase noise of the source is greater than the noise floor of the device under test, the source noise will dominate the additive phase jitter calculation and lead to an incorrect negative result for the additive phase noise within the integration range. The Figure above is a good example of the MC100LVELT22 source generator phase noise having a significantly lower floor than the DUT and results in an additive phase jitter of 219 fs.


$$\text{Additive RMS phase jitter} = \sqrt{\text{RMS phase jitter of output}^2 - \text{RMS phase jitter of input}^2}$$

$$219 \text{ fs} = \sqrt{587.92 \text{ fs}^2 - 545.23 \text{ fs}^2}$$

Figure 2 was created with measured data from Agilent-E5052B Signal Source Analyzer using ON Semiconductor Phase Noise Explorer web tool. This free application enables an interactive environment for advanced

phase noise and jitter analysis of timing devices and clock tree designs. To see the performance of MC100LVELT22 beyond conditions outlined in this datasheet, please visit the ON Semiconductor [Green Point Design Tools](#) homepage.


## MC100LVELT22

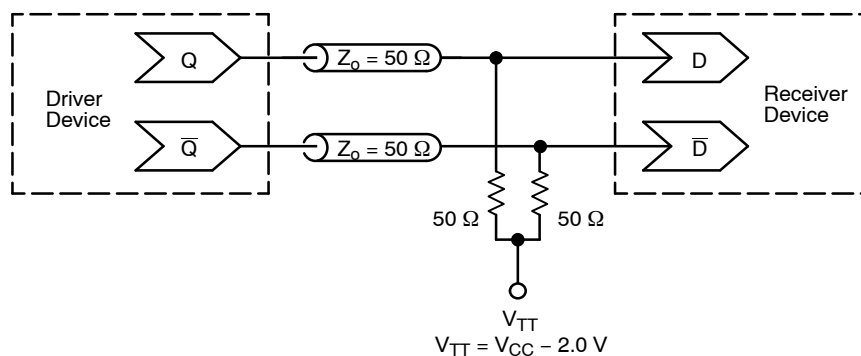

**Figure 3. Typical Termination for Output Driver and Device Evaluation**  
(See Application Note AND8020/D – Termination of ECL Logic Devices.)

### Resource Reference of Application Notes


- AN1405/D** – ECL Clock Distribution Techniques
- AN1406/D** – Designing with PECL (ECL at +5.0 V)
- AN1503/D** – ECLinPS™ I/O SPICE Modeling Kit
- AN1504/D** – Metastability and the ECLinPS Family
- AN1568/D** – Interfacing Between LVDS and ECL
- AN1672/D** – The ECL Translator Guide
- AND8001/D** – Odd Number Counters Design
- AND8002/D** – Marking and Date Codes
- AND8020/D** – Termination of ECL Logic Devices
- AND8066/D** – Interfacing with ECLinPS
- AND8090/D** – AC Characteristics of ECL Devices



SCALE 1:1

SOIC-8 NB  
CASE 751-07  
ISSUE AK

DATE 16 FEB 2011


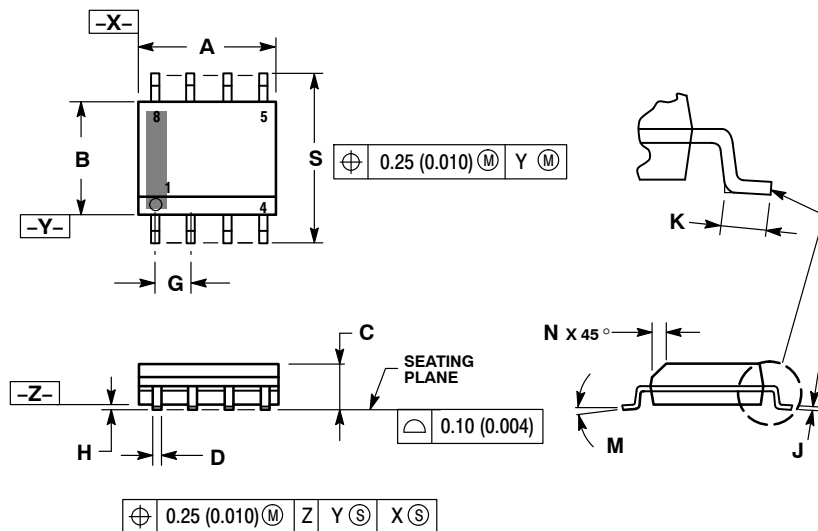


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. 751-01 THRU 751-06 ARE OBSOLETE. NEW STANDARD IS 751-07.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.80        | 5.00 | 0.189     | 0.197 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.053     | 0.069 |
| D   | 0.33        | 0.51 | 0.013     | 0.020 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| H   | 0.10        | 0.25 | 0.004     | 0.010 |
| J   | 0.19        | 0.25 | 0.007     | 0.010 |
| K   | 0.40        | 1.27 | 0.016     | 0.050 |
| M   | 0°          | 8°   | 0°        | 8°    |
| N   | 0.25        | 0.50 | 0.010     | 0.020 |
| S   | 5.80        | 6.20 | 0.228     | 0.244 |

GENERIC  
MARKING DIAGRAM\*

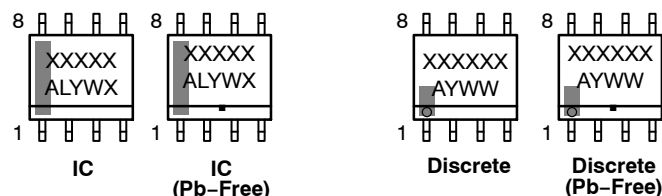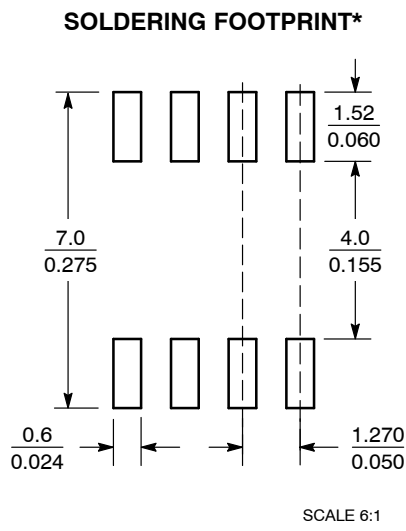

XXXXXX = Specific Device Code  
A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

XXXXXX = Specific Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week  
▪ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLES ON PAGE 2

|                  |             |                                                                                                                                                                                     |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42564B | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SOIC-8 NB   | PAGE 1 OF 2                                                                                                                                                                         |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**SOIC-8 NB**  
**CASE 751-07**  
**ISSUE AK**

DATE 16 FEB 2011

|                                                                                                                                                                                                   |                                                                                                                                                                                          |                                                                                                                                                                                    |                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>STYLE 1:</b><br>PIN 1. EMITTER<br>2. COLLECTOR<br>3. COLLECTOR<br>4. EMITTER<br>5. EMITTER<br>6. BASE<br>7. BASE<br>8. EMITTER                                                                 | <b>STYLE 2:</b><br>PIN 1. COLLECTOR, DIE, #1<br>2. COLLECTOR, #1<br>3. COLLECTOR, #2<br>4. COLLECTOR, #2<br>5. BASE, #2<br>6. EMITTER, #2<br>7. BASE, #1<br>8. EMITTER, #1               | <b>STYLE 3:</b><br>PIN 1. DRAIN, DIE #1<br>2. DRAIN, #1<br>3. DRAIN, #2<br>4. DRAIN, #2<br>5. GATE, #2<br>6. SOURCE, #2<br>7. GATE, #1<br>8. SOURCE, #1                            | <b>STYLE 4:</b><br>PIN 1. ANODE<br>2. ANODE<br>3. ANODE<br>4. ANODE<br>5. ANODE<br>6. ANODE<br>7. ANODE<br>8. COMMON CATHODE                                                                           |
| <b>STYLE 5:</b><br>PIN 1. DRAIN<br>2. DRAIN<br>3. DRAIN<br>4. DRAIN<br>5. GATE<br>6. GATE<br>7. SOURCE<br>8. SOURCE                                                                               | <b>STYLE 6:</b><br>PIN 1. SOURCE<br>2. DRAIN<br>3. DRAIN<br>4. SOURCE<br>5. SOURCE<br>6. GATE<br>7. GATE<br>8. SOURCE                                                                    | <b>STYLE 7:</b><br>PIN 1. INPUT<br>2. EXTERNAL BYPASS<br>3. THIRD STAGE SOURCE<br>4. GROUND<br>5. DRAIN<br>6. GATE 3<br>7. SECOND STAGE Vd<br>8. FIRST STAGE Vd                    | <b>STYLE 8:</b><br>PIN 1. COLLECTOR, DIE #1<br>2. BASE, #1<br>3. BASE, #2<br>4. COLLECTOR, #2<br>5. COLLECTOR, #2<br>6. EMITTER, #2<br>7. EMITTER, #1<br>8. COLLECTOR, #1                              |
| <b>STYLE 9:</b><br>PIN 1. EMITTER, COMMON<br>2. COLLECTOR, DIE #1<br>3. COLLECTOR, DIE #2<br>4. EMITTER, COMMON<br>5. EMITTER, COMMON<br>6. BASE, DIE #2<br>7. BASE, DIE #1<br>8. EMITTER, COMMON | <b>STYLE 10:</b><br>PIN 1. GROUND<br>2. BIAS 1<br>3. OUTPUT<br>4. GROUND<br>5. GROUND<br>6. BIAS 2<br>7. INPUT<br>8. GROUND                                                              | <b>STYLE 11:</b><br>PIN 1. SOURCE 1<br>2. GATE 1<br>3. SOURCE 2<br>4. GATE 2<br>5. DRAIN 2<br>6. DRAIN 2<br>7. DRAIN 1<br>8. DRAIN 1                                               | <b>STYLE 12:</b><br>PIN 1. SOURCE<br>2. SOURCE<br>3. SOURCE<br>4. GATE<br>5. DRAIN<br>6. DRAIN<br>7. DRAIN<br>8. DRAIN                                                                                 |
| <b>STYLE 13:</b><br>PIN 1. N.C.<br>2. SOURCE<br>3. SOURCE<br>4. GATE<br>5. DRAIN<br>6. DRAIN<br>7. DRAIN<br>8. DRAIN                                                                              | <b>STYLE 14:</b><br>PIN 1. N-SOURCE<br>2. N-GATE<br>3. P-SOURCE<br>4. P-GATE<br>5. P-DRAIN<br>6. P-DRAIN<br>7. N-DRAIN<br>8. N-DRAIN                                                     | <b>STYLE 15:</b><br>PIN 1. ANODE 1<br>2. ANODE 1<br>3. ANODE 1<br>4. ANODE 1<br>5. CATHODE, COMMON<br>6. CATHODE, COMMON<br>7. CATHODE, COMMON<br>8. CATHODE, COMMON               | <b>STYLE 16:</b><br>PIN 1. EMITTER, DIE #1<br>2. BASE, DIE #1<br>3. EMITTER, DIE #2<br>4. BASE, DIE #2<br>5. COLLECTOR, DIE #2<br>6. COLLECTOR, DIE #2<br>7. COLLECTOR, DIE #1<br>8. COLLECTOR, DIE #1 |
| <b>STYLE 17:</b><br>PIN 1. VCC<br>2. V2OUT<br>3. V1OUT<br>4. TXE<br>5. RXE<br>6. VEE<br>7. GND<br>8. ACC                                                                                          | <b>STYLE 18:</b><br>PIN 1. ANODE<br>2. ANODE<br>3. SOURCE<br>4. GATE<br>5. DRAIN<br>6. DRAIN<br>7. CATHODE<br>8. CATHODE                                                                 | <b>STYLE 19:</b><br>PIN 1. SOURCE 1<br>2. GATE 1<br>3. SOURCE 2<br>4. GATE 2<br>5. DRAIN 2<br>6. MIRROR 2<br>7. DRAIN 1<br>8. MIRROR 1                                             | <b>STYLE 20:</b><br>PIN 1. SOURCE (N)<br>2. GATE (N)<br>3. SOURCE (P)<br>4. GATE (P)<br>5. DRAIN<br>6. DRAIN<br>7. DRAIN<br>8. DRAIN                                                                   |
| <b>STYLE 21:</b><br>PIN 1. CATHODE 1<br>2. CATHODE 2<br>3. CATHODE 3<br>4. CATHODE 4<br>5. CATHODE 5<br>6. COMMON ANODE<br>7. COMMON ANODE<br>8. CATHODE 6                                        | <b>STYLE 22:</b><br>PIN 1. I/O LINE 1<br>2. COMMON CATHODE/VCC<br>3. COMMON CATHODE/VCC<br>4. I/O LINE 3<br>5. COMMON ANODE/GND<br>6. I/O LINE 4<br>7. I/O LINE 5<br>8. COMMON ANODE/GND | <b>STYLE 23:</b><br>PIN 1. LINE 1 IN<br>2. COMMON ANODE/GND<br>3. COMMON ANODE/GND<br>4. LINE 2 IN<br>5. LINE 2 OUT<br>6. COMMON ANODE/GND<br>7. COMMON ANODE/GND<br>8. LINE 1 OUT | <b>STYLE 24:</b><br>PIN 1. BASE<br>2. EMITTER<br>3. COLLECTOR/ANODE<br>4. COLLECTOR/ANODE<br>5. CATHODE<br>6. CATHODE<br>7. COLLECTOR/ANODE<br>8. COLLECTOR/ANODE                                      |
| <b>STYLE 25:</b><br>PIN 1. VIN<br>2. N/C<br>3. REXT<br>4. GND<br>5. IOUT<br>6. IOUT<br>7. IOUT<br>8. IOUT                                                                                         | <b>STYLE 26:</b><br>PIN 1. GND<br>2. dv/dt<br>3. ENABLE<br>4. ILIMIT<br>5. SOURCE<br>6. SOURCE<br>7. SOURCE<br>8. VCC                                                                    | <b>STYLE 27:</b><br>PIN 1. ILIMIT<br>2. OVLO<br>3. UVLO<br>4. INPUT+<br>5. SOURCE<br>6. SOURCE<br>7. SOURCE<br>8. DRAIN                                                            | <b>STYLE 28:</b><br>PIN 1. SW_TO_GND<br>2. DASIC_OFF<br>3. DASIC_SW_DET<br>4. GND<br>5. V_MON<br>6. VBULK<br>7. VBULK<br>8. VIN                                                                        |
| <b>STYLE 29:</b><br>PIN 1. BASE, DIE #1<br>2. EMITTER, #1<br>3. BASE, #2<br>4. EMITTER, #2<br>5. COLLECTOR, #2<br>6. COLLECTOR, #2<br>7. COLLECTOR, #1<br>8. COLLECTOR, #1                        | <b>STYLE 30:</b><br>PIN 1. DRAIN 1<br>2. DRAIN 1<br>3. GATE 2<br>4. SOURCE 2<br>5. SOURCE 1/DRAIN 2<br>6. SOURCE 1/DRAIN 2<br>7. SOURCE 1/DRAIN 2<br>8. GATE 1                           |                                                                                                                                                                                    |                                                                                                                                                                                                        |

|                         |                    |                                                                                                                                                                                     |
|-------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42564B</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOIC-8 NB</b>   | <b>PAGE 2 OF 2</b>                                                                                                                                                                  |


**onsemi** and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.



SCALE 2:1

**TSSOP-8 3.00x3.00x0.95**  
CASE 948R-02  
ISSUE A

DATE 07 APR 2000

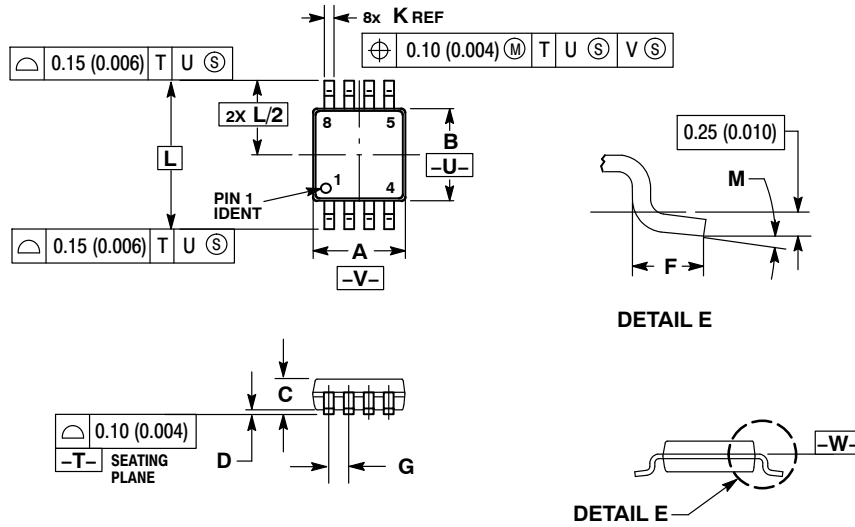

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
6. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 2.90        | 3.10 | 0.114     | 0.122 |
| B   | 2.90        | 3.10 | 0.114     | 0.122 |
| C   | 0.80        | 1.10 | 0.031     | 0.043 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.40        | 0.70 | 0.016     | 0.028 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| K   | 0.25        | 0.40 | 0.010     | 0.016 |
| L   | 4.90 BSC    |      | 0.193 BSC |       |
| M   | 0°          | 6°   | 0°        | 6°    |

|                  |                        |                                                                                                                                                                                  |
|------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON00236D            | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | TSSOP-8 3.00x3.00x0.95 | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)