

| Photo | Dimensions | Mounting Hole Dimensions | Output Wave | Sliding Noise |
| Packing Specifications | Soldering Conditions |

PRINT


Part number		EC28A1550401	
Actuator length		15mm	
Detent torque		12±7mN·m	
Number of detent		30	
Number of pulse		15	
Operating temperature range		-40℃ to +85℃	
Electrical performance	Ratings	10mA 5V DC	
	Output signal	Two phase A and B	
	Max./min. operating current(Resistive load)	10mA/1mA	
	Insulation resistance	100MΩ min. 250V DC	
	Voltage proof	300V AC for 1 minute or 360V AC for 2s	
Mechanical performance	Actuator strength	Pushing direction	100N
		Pulling direction	100N
Durability	Operating life	50,000 cycles	
Minimum order unit (pcs.)	Japan	400	
	Export	800	
3D CAD (STEP)			↓
Certificate of Compliance to RoHS regulations			↓

Photo






Dimensions

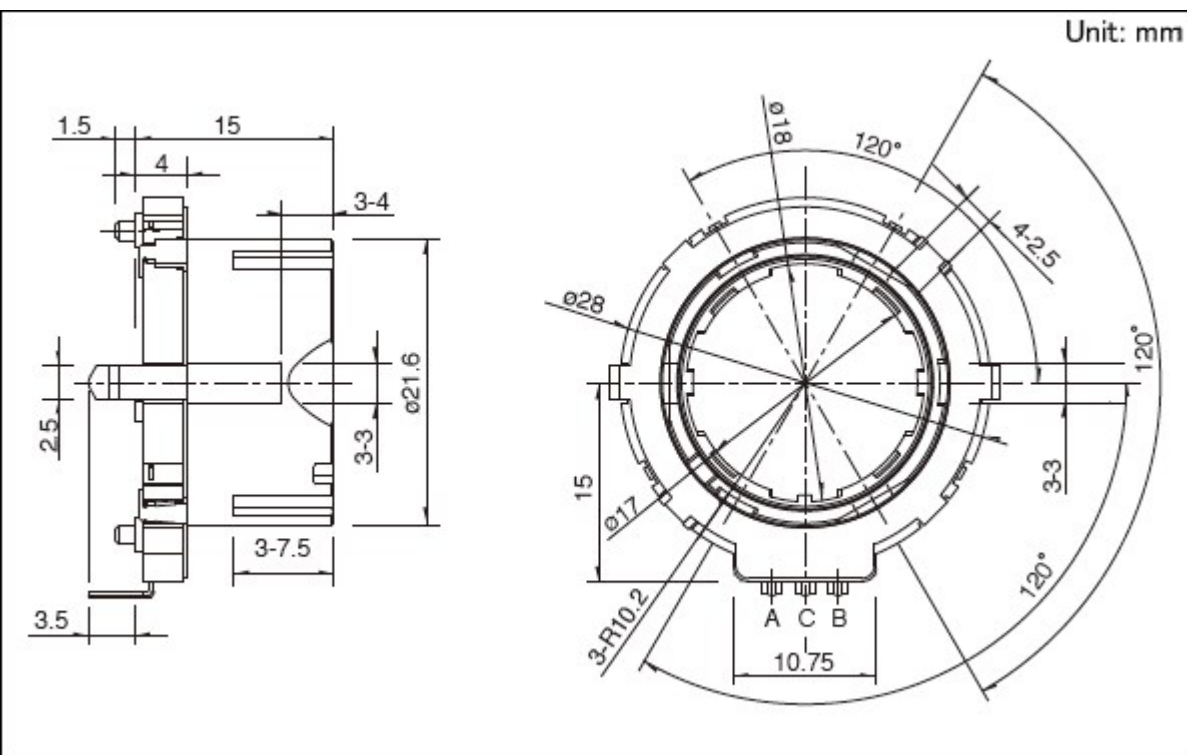



Mounting Hole Dimensions

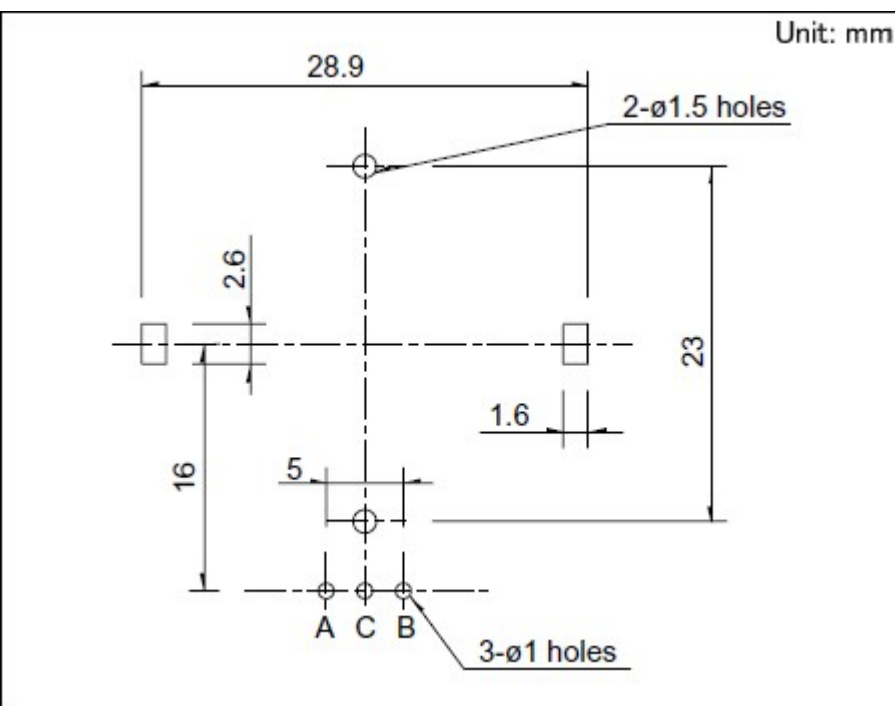


Viewed from mounting side

Output Wave



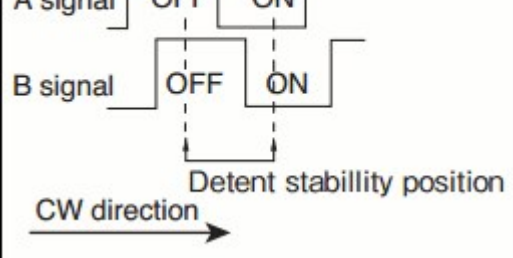

Sliding Noise

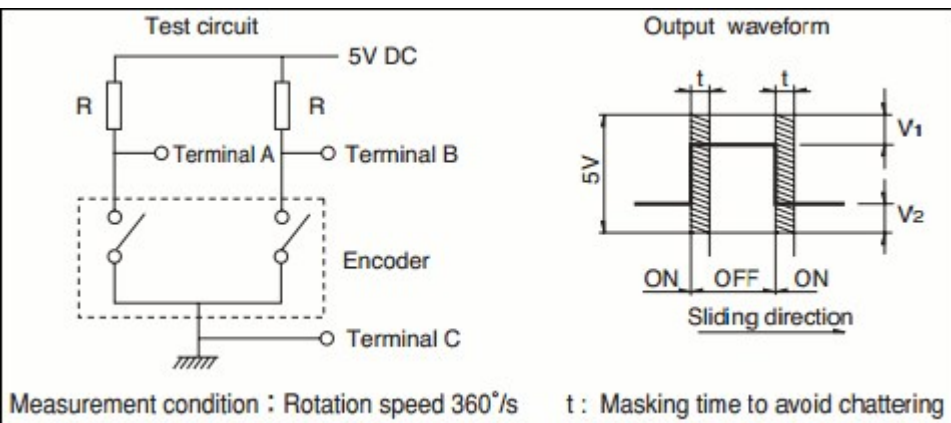

V₁=V₂=2.5V max.

At R = 5kΩ Chattering : 5ms max. Bounce : 5ms max.

Packing Specifications

Tray

Number of packages 1 case / Japan 400
(pcs.)

1 case / export 800
packing

Export package measurements (mm) 366×509×287

Soldering Conditions

Reference for Dip Soldering

Preheating	Soldering surfacetemperature	100°C max.
	Heating time	2 min. max.
Dip soldering	Soldering temperature	260±5°C
	Soldering time	5±1s
No. of solders		2 time max.

Reference for Hand Soldering

Tip temperature	350°C max.
Soldering time	3s max.

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).
3. This products can be used in vehicles.
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products

 **Inquiry**