

Part number			SPVT210201
Poles			1
Positions			1
Terminal type			For PC board (Reflow)
Operating force			0.4N max.
Operating direction			Left
Location lug			Without
Side terminal			With both sides.
Operating temperature range			-40℃ to +85℃
Rating (max.)/(min.) (Resistive load)			50mA 20V DC/100μA 3V DC
Electrical performance	Contact resistance (Initial/After operating life)	500mΩ max./1Ω max.	
	Insulation resistance	100MΩ min. 100V DC	
	Voltage proof	100V AC for 1 minute	
Mechanical performance	Terminal strength	0.5N for 1 minute	
	Actuator strength	10N	
Durability	Operating life without load	100,000 cycles 1Ω max.	
	Operating life with load Rating (max.) (Resistive load)	100,000 cycles 1Ω max.	
Environmental performance	Cold	-40℃ 96h	
	Dry heat	85℃ 96h	
	Damp heat	40℃, 90 to 95%RH 96h	


Minimum order unit (pcs.)	Japan	2,500
	Export	10,000

3D CAD (STEP)	↓
Certificate of Compliance to RoHS regulations	↓


Photo



Dimensions

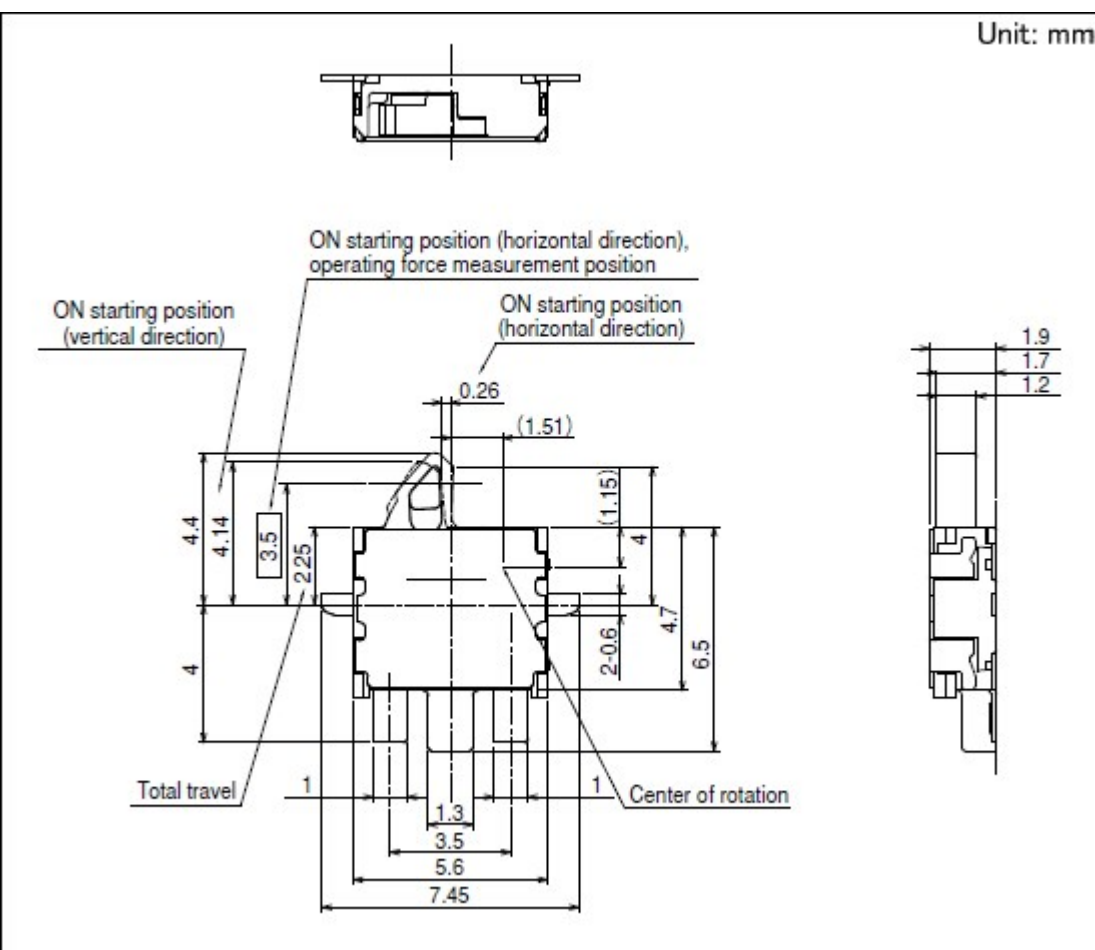


Land Dimensions

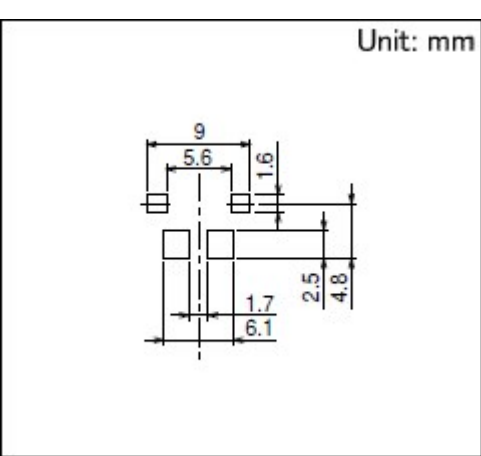


Viewed from direction A in the dimensions.

Circuit Diagram

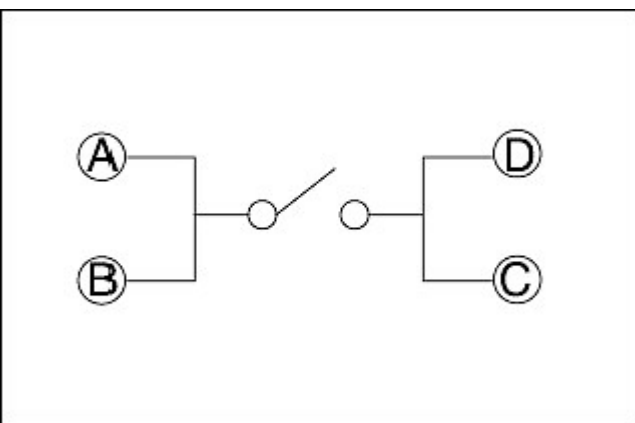

Packing Specifications

Taping

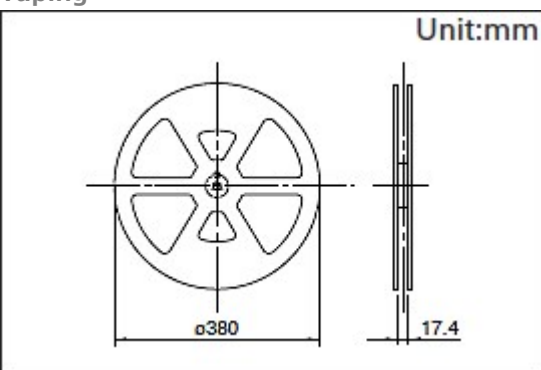

Number of packages (pcs.)	1 reel	2,500
	1 case / Japan	5,000
	1 case / export packing	10,000
Tape width (mm)		16
Export package measurements (mm)		417×409×139

Soldering Conditions

Example of Reflow Soldering Condition


1. Heating method

Double heating method with infrared heater.

2. Temperature measurement

Thermocouple 0.1 to 0.2VCA (K) or CC (T) at soldering portion (copper foil surface) . A heat resisting tape should be used for fixed measurement.

3. Temperature profile

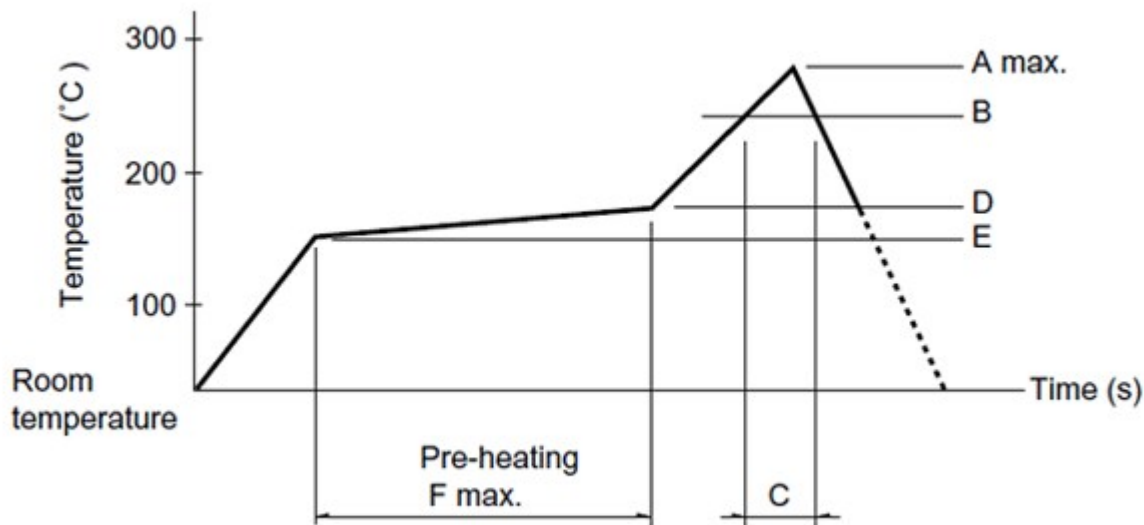

A(°C) 3s max.	B(°C)	C(s)	D(°C)	E(°C)	F(s)
260	230	40	180	150	120

(1) The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, surface depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.

(2) Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Reference for Hand Soldering

Soldering temperature	350±5°C
Soldering time	3s max.

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. This unit cannot be used in water.
3. Please place purchase orders per minimum order unit (integer).
4. This products can be used in vehicles.
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products

