

Surface Mount Type TACT Switch(TM) > SKQG Series > SKQGABE010

Series Common Info

5.2mm Square Low-profile Type (Surface Mount) SKQG Series

| Photo | Dimensions | Land Dimensions | Circuit Diagram | Packing Specifications |
| Soldering Conditions |

PRINT

With stem


Part number			SKQGABE010
Type			Surface mount
Operating force			1.57N
Operating direction			Top push
Travel			0.25mm
Operating life (5mA 5V DC)			1,000,000 cycles
Initial contact resistance			100mΩ max.
Series type			Sharp feeling type
Operating temperature range			-40℃ to +90℃
Rating (max.)			50mA 12V DC
Rating (min.)			10μA 1V DC
Electrical performance	Insulation resistance	100MΩ min. 100V DC for 1min.	
	Voltage proof	250V AC for 1 min.	
Durability	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively	
Environmental performance	Cold	-30±2℃ for 96h	
	Dry heat	80±2℃ for 96h	
	Damp heat	60±2℃, 90 to 95%RH for 96h	
Minimum order unit (pcs.)	Japan	4,000	
	Export	4,000	




Photo




Dimensions

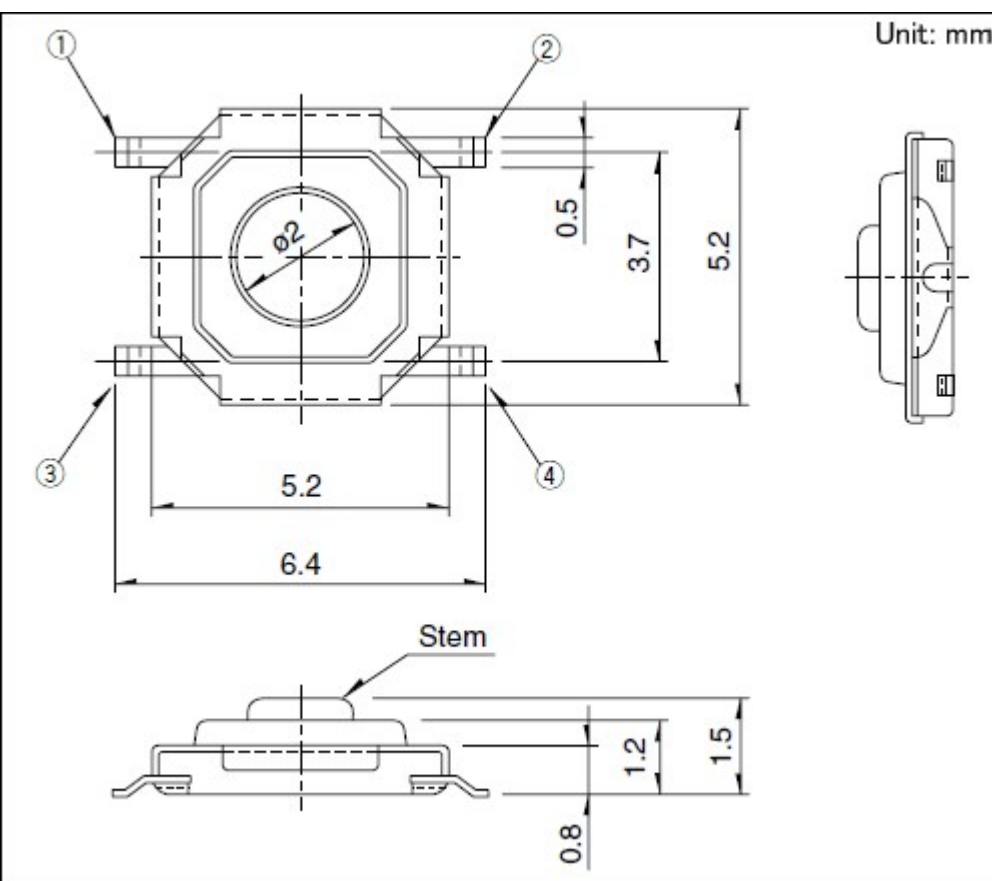


Land Dimensions

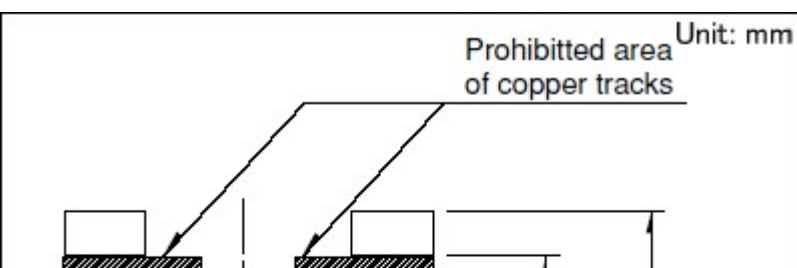

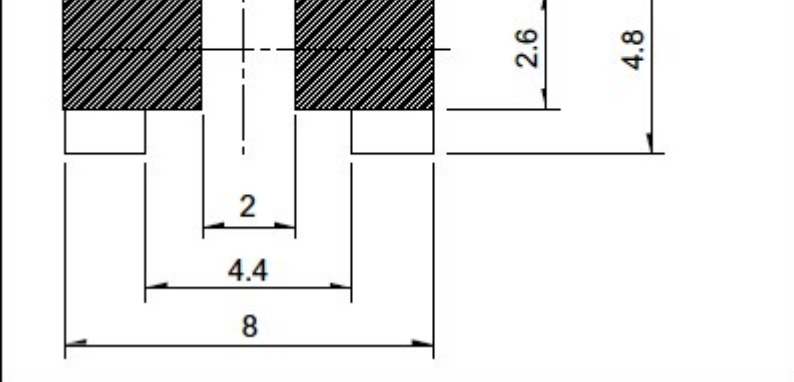


Viewed from mounting face.

Circuit Diagram

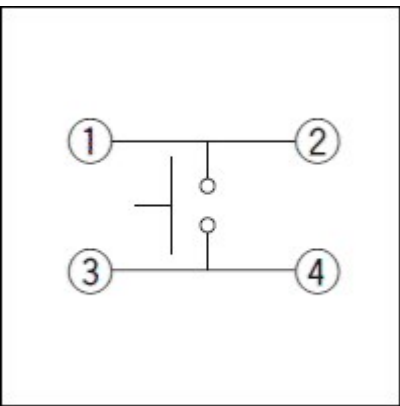

Packing Specifications

Taping

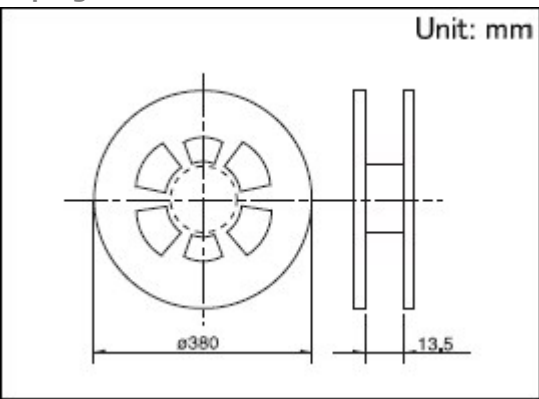

Number of packages (pcs.)	1 reel	4,000
	1 case / Japan	40,000
	1 case / export packing	40,000
Tape width (mm)	12	
Export package measurements (mm)	395×395×205	

Soldering Conditions

Condition for Reflow


1. Heating method

Double heating method with infrared heater.

2. Temperature measurement

Thermocouple 0.1 to 0.2 Φ CA(K) or CC(T) at solder joints (copper foil surface). A heat resisting tape should be used for fix measurement.

3. Temperature profile

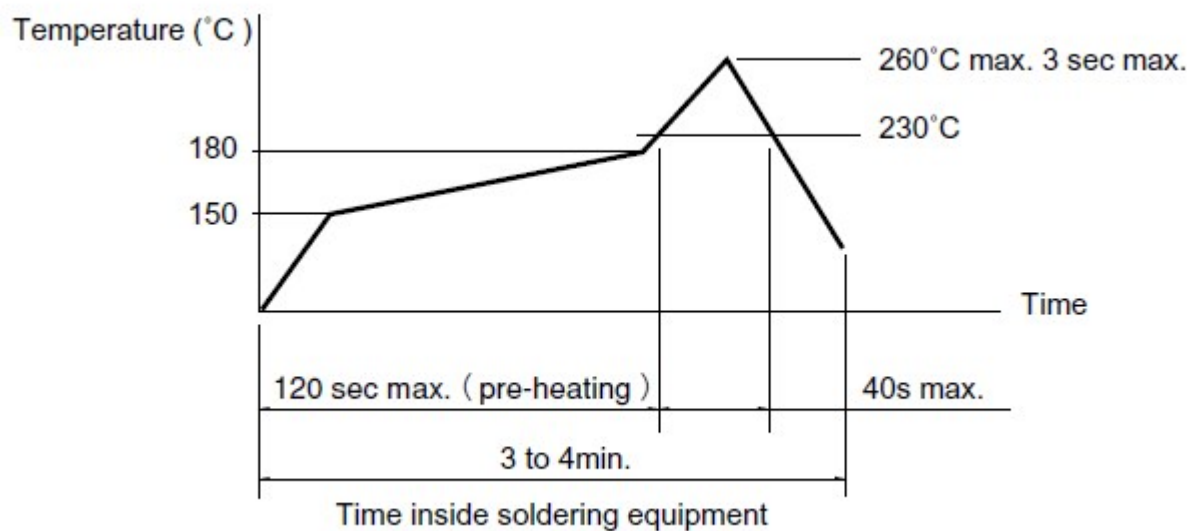

(1) The above temperature shall be measured of the top of switch. There are cases where PC board's temperature greatly differs from that of the switch, depending on the material, size, thickness of PC board's and others. Care, should be taken to prevent the switch's surface temperature from exceeding 260°C.

(2) Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Manual Soldering

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

1. Consult with us for availability of TACT switch™ washing.

2. Prevent flux penetration from the top side of the TACT switch™.

3. Switch terminals and a PC board should not be coated with flux prior to soldering.

4. The second soldering should be done after the switch returns to normal temperature.

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.

2. For $\phi 330$ mm diameter reel requirements, please contact us.

3. This products can be used in vehicles.

Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Inquiries about Products

[Inquiry](#)

