

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1




ON Semiconductor
Formerly a Division of Motorola
<http://onsemi.com>

Dual General Purpose Transistors

The MBT3904DW1T1, MBT3906DW1T1, and MBT3946DW1T1 devices are spin-offs of our popular SOT-23/SOT-323 three-lead devices. They are designed for general purpose amplifier applications and are housed in the SOT-363 six-lead surface mount package. By putting two discrete devices in one package, these devices are ideal for low-power surface mount applications where board space is at a premium.

- h_{FE} , 100–300
- Low $V_{CE(sat)}$, ≤ 0.4 V
- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- Available in 8 mm, 7-inch/3,000 Unit Tape and Reel
- Device Marking: MBT3904DW1T1 = MA
MBT3906DW1T1 = A2
MBT3946DW1T1 = 46



**SOT-363/SC-88
CASE 419B
STYLE 1**


MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V_{CEO}	40 –40	Vdc
Collector–Base Voltage MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V_{CBO}	60 –40	Vdc
Emitter–Base Voltage MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V_{EBO}	6.0 –5.0	Vdc
Collector Current — Continuous MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	I_C	200 –200	mAdc
Electrostatic Discharge	ESD	HBM>16000, MM>2000	V


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Package Dissipation ⁽¹⁾ $T_A = 25^\circ\text{C}$	P_D	150	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range	T_J, T_{stg}	–55 to +150	$^\circ\text{C}$


1. Device mounted on FR4 glass epoxy printed circuit board using the minimum recommended footprint.



MBT3904DW1T1



MBT3906DW1T1



MBT3946DW1T1*

*Q1 same as MBT3906DW1T1
Q2 same as MBT3904DW1T1

ORDERING INFORMATION

Device	Package	Shipping
MBT3904DW1T1	SOT-363	3000 Units/Reel
MBT3906DW1T1	SOT-363	3000 Units/Reel
MBT3946DW1T1	SOT-363	3000 Units/Reel

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit	
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage ⁽²⁾ (I _C = 1.0 mA, I _B = 0) (I _C = -1.0 mA, I _B = 0)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V _{(BR)CEO}	40 -40	— —	Vdc
Collector–Base Breakdown Voltage (I _C = 10 μA, I _E = 0) (I _C = -10 μA, I _E = 0)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V _{(BR)CBO}	60 -40	— —	Vdc
Emitter–Base Breakdown Voltage (I _E = 10 μA, I _C = 0) (I _E = -10 μA, I _C = 0)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V _{(BR)EBO}	6.0 -5.0	— —	Vdc
Base Cutoff Current (V _{CE} = 30 Vdc, V _{EB} = 3.0 Vdc) (V _{CE} = -30 Vdc, V _{EB} = -3.0 Vdc)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	I _{BL}	— —	50 -50	nAdc
Collector Cutoff Current (V _{CE} = 30 Vdc, V _{EB} = 3.0 Vdc) (V _{CE} = -30 Vdc, V _{EB} = -3.0 Vdc)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	I _{CEx}	— —	50 -50	nAdc
ON CHARACTERISTICS (2)					
DC Current Gain (I _C = 0.1 mA, V _{CE} = 1.0 Vdc) (I _C = 1.0 mA, V _{CE} = 1.0 Vdc) (I _C = 10 mA, V _{CE} = 1.0 Vdc) (I _C = 50 mA, V _{CE} = 1.0 Vdc) (I _C = 100 mA, V _{CE} = 1.0 Vdc) (I _C = -0.1 mA, V _{CE} = -1.0 Vdc) (I _C = -1.0 mA, V _{CE} = -1.0 Vdc) (I _C = -10 mA, V _{CE} = -1.0 Vdc) (I _C = -50 mA, V _{CE} = -1.0 Vdc) (I _C = -100 mA, V _{CE} = -1.0 Vdc)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	h _{FE}	40 70 100 60 30 60 80 100 60 30	— — 300 — — — — 300 — —	—
Collector–Emitter Saturation Voltage (I _C = 10 mA, I _B = 1.0 mA) (I _C = 50 mA, I _B = 5.0 mA) (I _C = -10 mA, I _B = -1.0 mA) (I _C = -50 mA, I _B = -5.0 mA)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V _{CE(sat)}	— — — —	0.2 0.3 -0.25 -0.4	Vdc
Base–Emitter Saturation Voltage (I _C = 10 mA, I _B = 1.0 mA) (I _C = 50 mA, I _B = 5.0 mA) (I _C = -10 mA, I _B = -1.0 mA) (I _C = -50 mA, I _B = -5.0 mA)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	V _{BE(sat)}	0.65 — -0.65 —	0.85 0.95 -0.85 -0.95	Vdc
SMALL–SIGNAL CHARACTERISTICS					
Current–Gain — Bandwidth Product (I _C = 10 mA, V _{CE} = 20 Vdc, f = 100 MHz) (I _C = -10 mA, V _{CE} = -20 Vdc, f = 100 MHz)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	f _T	300 250	— —	MHz
Output Capacitance (V _{CB} = 5.0 Vdc, I _E = 0, f = 1.0 MHz) (V _{CB} = -5.0 Vdc, I _E = 0, f = 1.0 MHz)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	C _{obo}	— —	4.0 4.5	pF
Input Capacitance (V _{EB} = 0.5 Vdc, I _C = 0, f = 1.0 MHz) (V _{EB} = -0.5 Vdc, I _C = 0, f = 1.0 MHz)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	C _{ibo}	— —	8.0 10.0	pF

2. Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%.

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic		Symbol	Min	Max	Unit
Input Impedance ($V_{CE} = 10\text{ Vdc}$, $I_C = 1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$) ($V_{CE} = -10\text{ Vdc}$, $I_C = -1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	h_{ie}	1.0 2.0	10 12	$k\ \Omega$
Voltage Feedback Ratio ($V_{CE} = 10\text{ Vdc}$, $I_C = 1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$) ($V_{CE} = -10\text{ Vdc}$, $I_C = -1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	h_{re}	0.5 0.1	8.0 10	$\times 10^{-4}$
Small-Signal Current Gain ($V_{CE} = 10\text{ Vdc}$, $I_C = 1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$) ($V_{CE} = -10\text{ Vdc}$, $I_C = -1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	h_{fe}	100 100	400 400	—
Output Admittance ($V_{CE} = 10\text{ Vdc}$, $I_C = 1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$) ($V_{CE} = -10\text{ Vdc}$, $I_C = -1.0\text{ mAdc}$, $f = 1.0\text{ kHz}$)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	h_{oe}	1.0 3.0	40 60	μmhos
Noise Figure ($V_{CE} = 5.0\text{ Vdc}$, $I_C = 100\ \mu\text{A}$, $R_S = 1.0\text{ k}\ \Omega$, $f = 1.0\text{ kHz}$) ($V_{CE} = -5.0\text{ Vdc}$, $I_C = -100\ \mu\text{A}$, $R_S = 1.0\text{ k}\ \Omega$, $f = 1.0\text{ kHz}$)	MBT3904DW1T1 (NPN) MBT3906DW1T1 (PNP)	NF	— —	5.0 4.0	dB

SWITCHING CHARACTERISTICS

Delay Time	($V_{CC} = 3.0\text{ Vdc}$, $V_{BE} = -0.5\text{ Vdc}$)	MBT3904DW1T1 (NPN)	t_d	—	35	ns
	($V_{CC} = -3.0\text{ Vdc}$, $V_{BE} = 0.5\text{ Vdc}$)	MBT3906DW1T1 (PNP)		—	35	
Rise Time	($I_C = 10\text{ mAdc}$, $I_{B1} = 1.0\text{ mAdc}$)	MBT3904DW1T1 (NPN)	t_r	—	35	ns
	($I_C = -10\text{ mAdc}$, $I_{B1} = -1.0\text{ mAdc}$)	MBT3906DW1T1 (PNP)		—	35	
Storage Time	($V_{CC} = 3.0\text{ Vdc}$, $I_C = 10\text{ mAdc}$)	MBT3904DW1T1 (NPN)	t_s	—	200	ns
	($V_{CC} = -3.0\text{ Vdc}$, $I_C = -10\text{ mAdc}$)	MBT3906DW1T1 (PNP)		—	225	
Fall Time	($I_{B1} = I_{B2} = 1.0\text{ mAdc}$)	MBT3904DW1T1 (NPN)	t_f	—	50	ns
	($I_{B1} = I_{B2} = -1.0\text{ mAdc}$)	MBT3906DW1T1 (PNP)		—	75	

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

MBT3904DW1T1 (NPN)

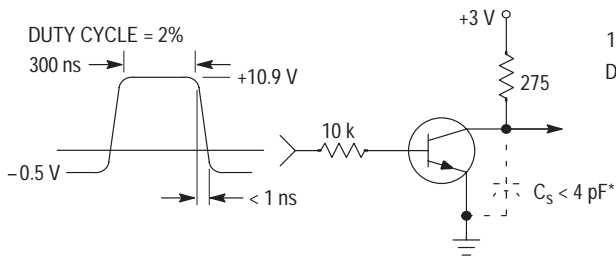


Figure 1. Delay and Rise Time Equivalent Test Circuit

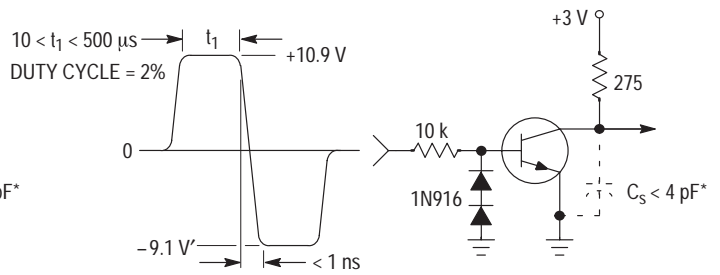


Figure 2. Storage and Fall Time Equivalent Test Circuit

* Total shunt capacitance of test jig and connectors

TYPICAL TRANSIENT CHARACTERISTICS

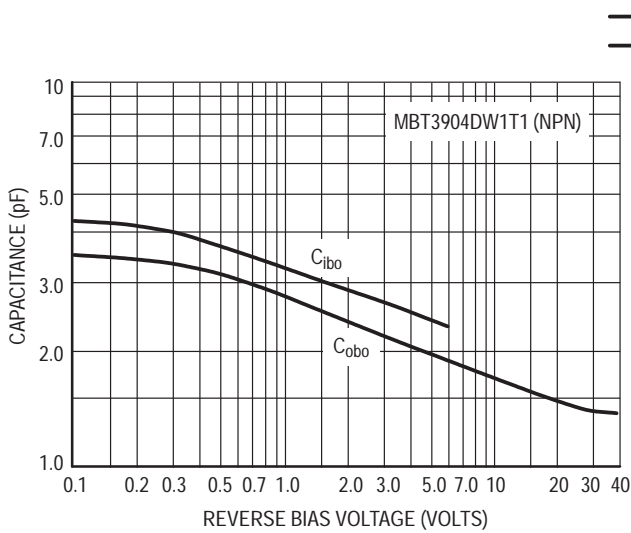


Figure 3. Capacitance

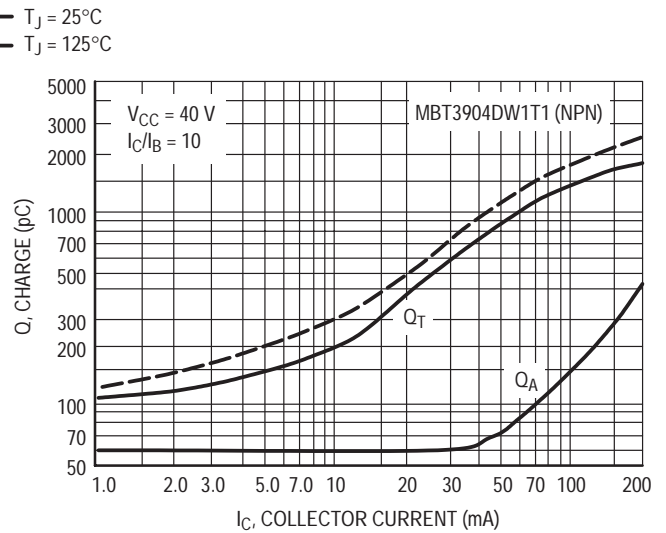


Figure 4. Charge Data

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

MBT3904DW1T1 (NPN)

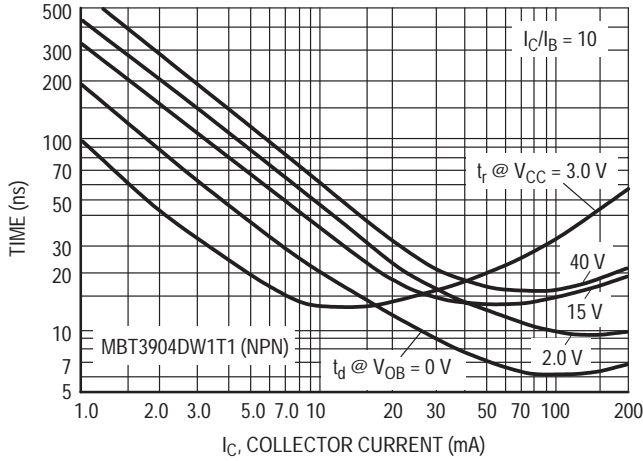


Figure 5. Turn-On Time

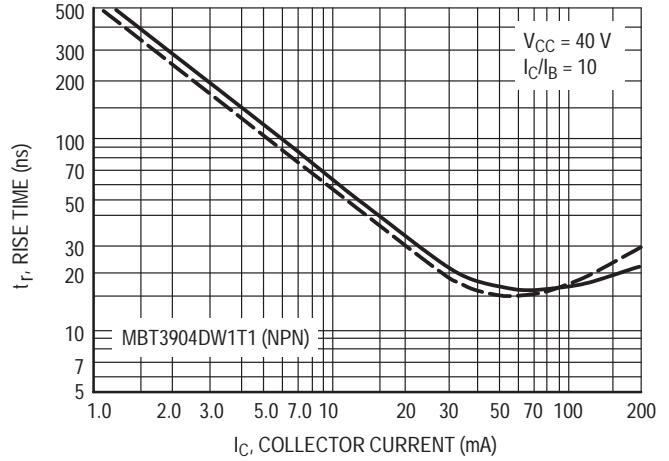


Figure 6. Rise Time

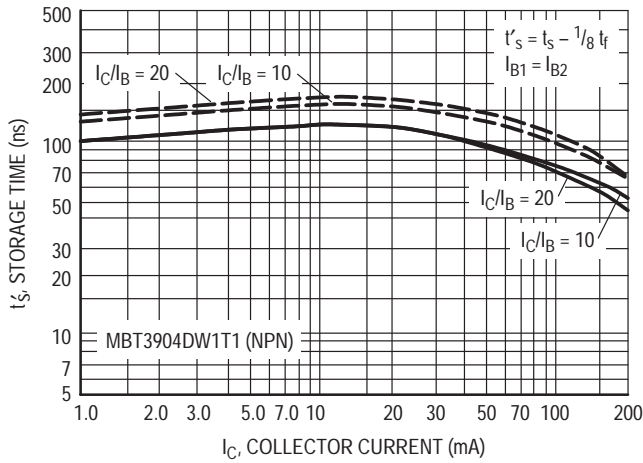


Figure 7. Storage Time

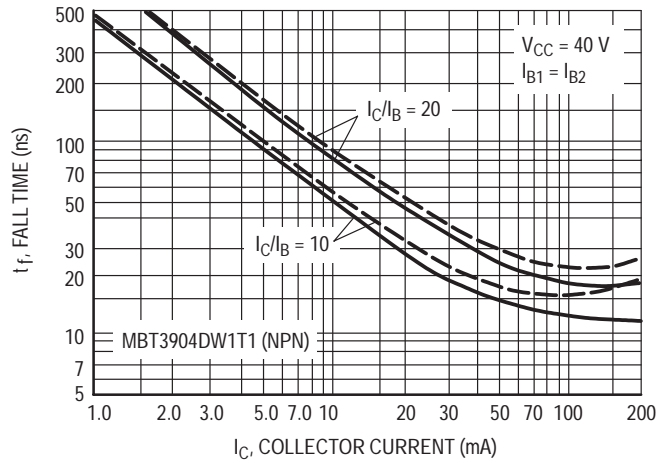


Figure 8. Fall Time

TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

($V_{CE} = 5.0 V_{dc}$, $T_A = 25^\circ C$, Bandwidth = 1.0 Hz)

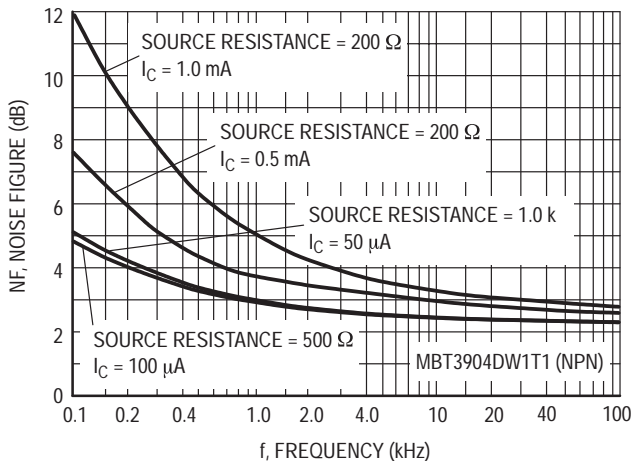


Figure 9. Noise Figure

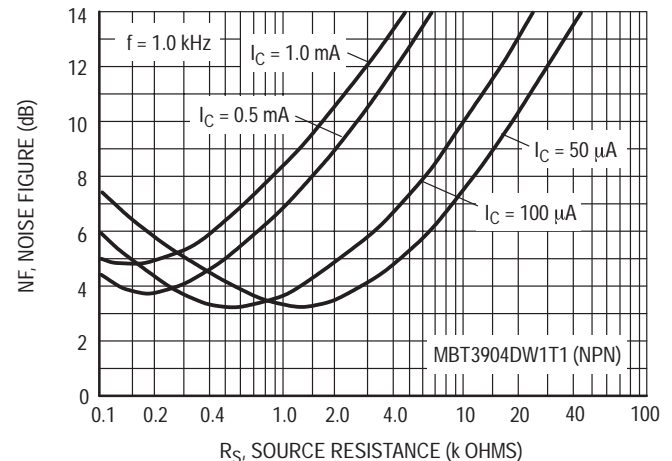


Figure 10. Noise Figure

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

MBT3904DW1T1 (NPN)

h PARAMETERS

($V_{CE} = 10 \text{ Vdc}$, $f = 1.0 \text{ kHz}$, $T_A = 25^\circ\text{C}$)

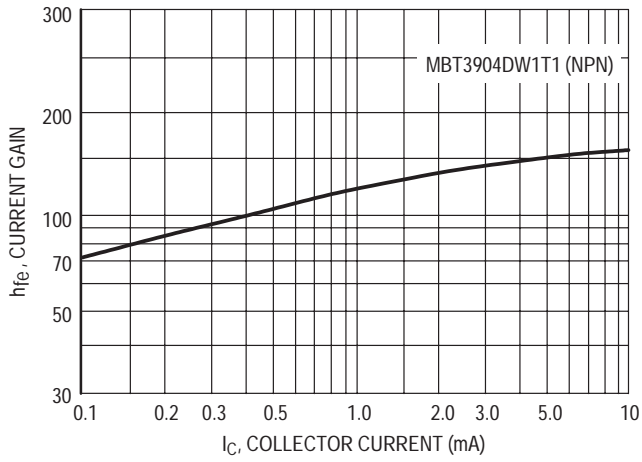


Figure 11. Current Gain

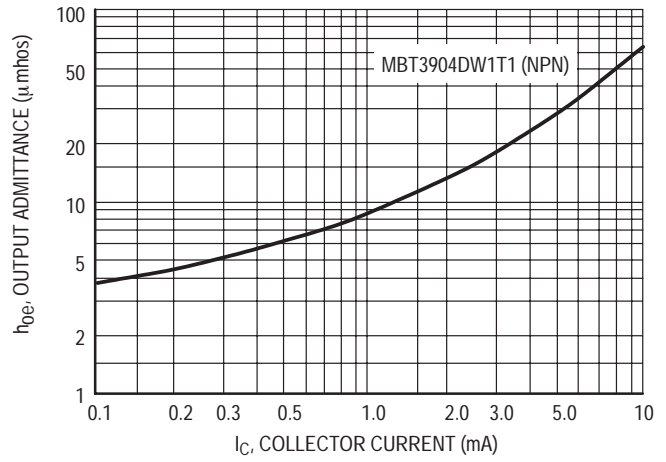


Figure 12. Output Admittance

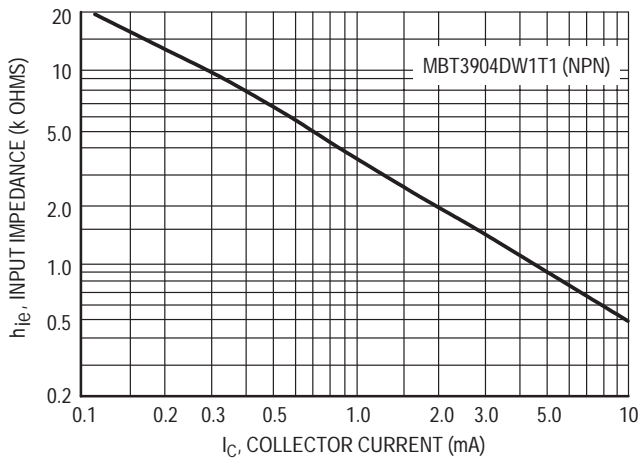


Figure 13. Input Impedance

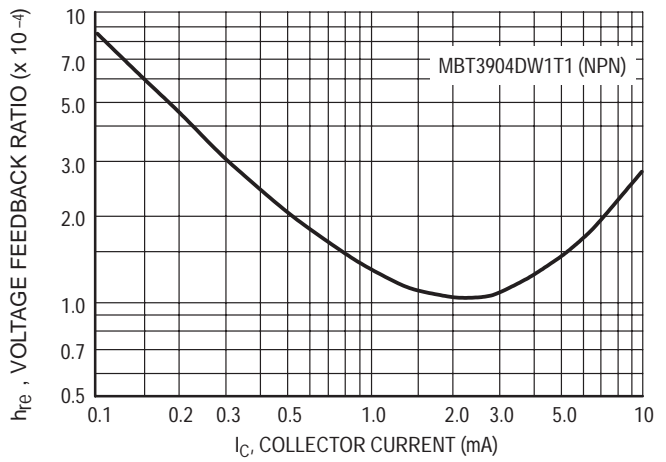


Figure 14. Voltage Feedback Ratio

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

MBT3904DW1T1 (NPN)

TYPICAL STATIC CHARACTERISTICS

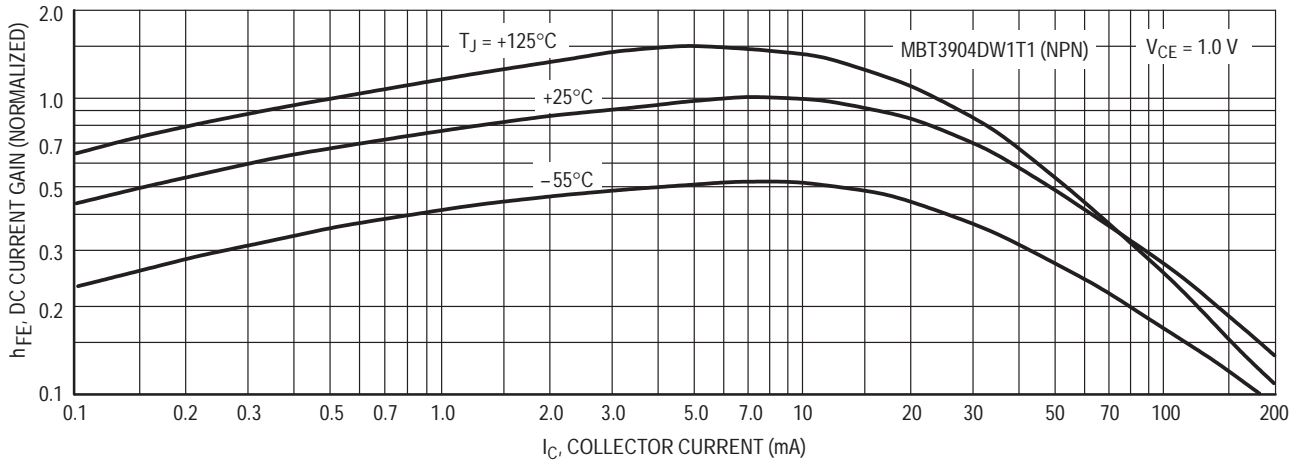


Figure 15. DC Current Gain

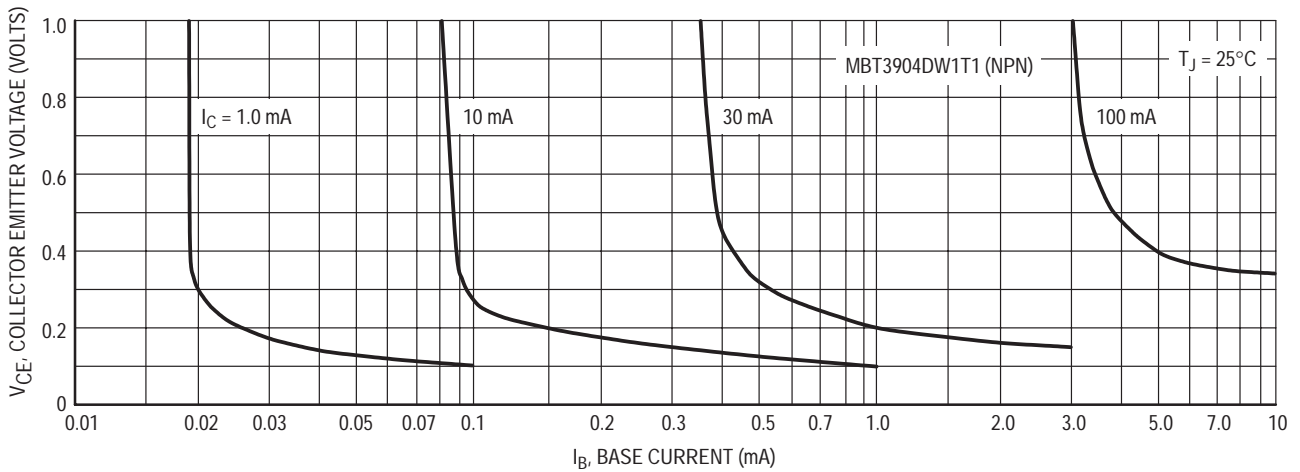


Figure 16. Collector Saturation Region

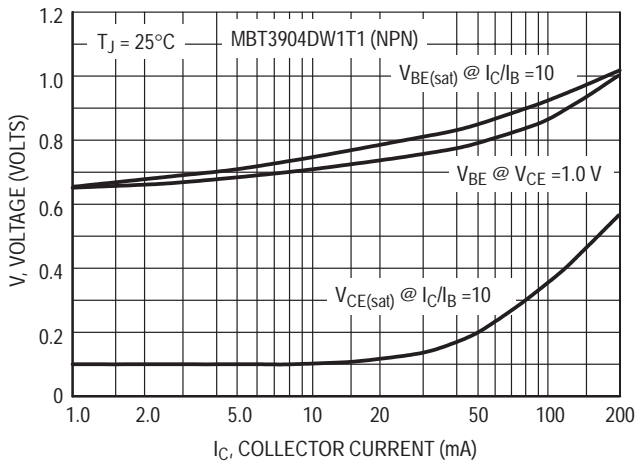


Figure 17. "ON" Voltages

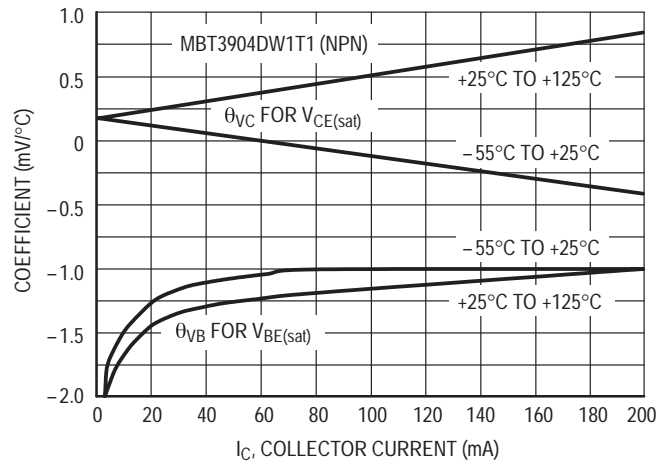


Figure 18. Temperature Coefficients

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

MBT3906DW1T1 (PNP)

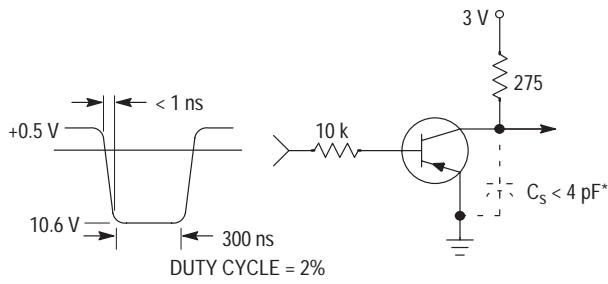


Figure 19. Delay and Rise Time Equivalent Test Circuit

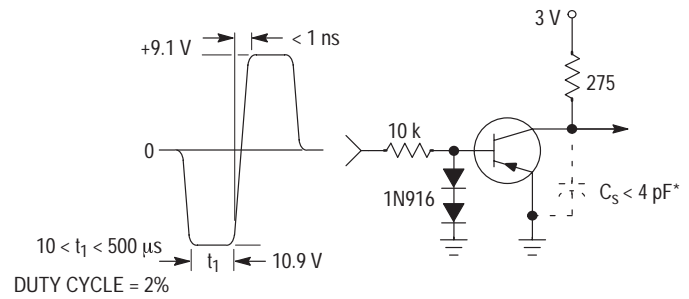


Figure 20. Storage and Fall Time Equivalent Test Circuit

* Total shunt capacitance of test jig and connectors

TYPICAL TRANSIENT CHARACTERISTICS

— $T_J = 25^\circ\text{C}$
 - - - $T_J = 125^\circ\text{C}$

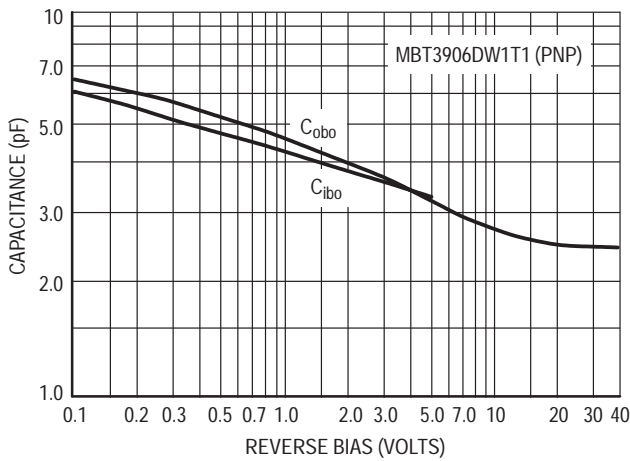


Figure 21. Capacitance

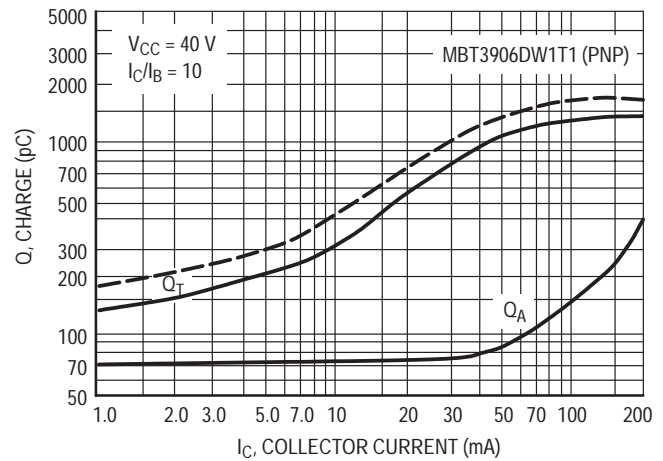


Figure 22. Charge Data

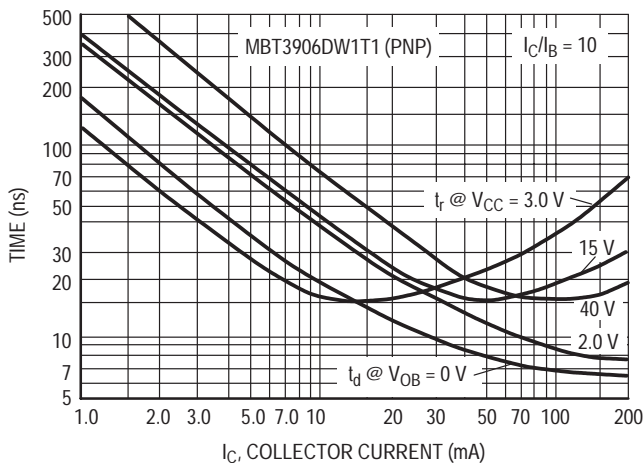


Figure 23. Turn-On Time

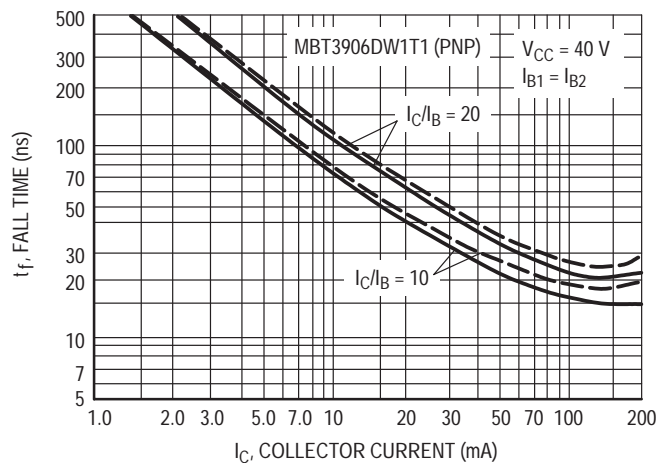


Figure 24. Fall Time

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

MBT3906DW1T1 (PNP)

TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

($V_{CE} = -5.0$ Vdc, $T_A = 25^\circ\text{C}$, Bandwidth = 1.0 Hz)

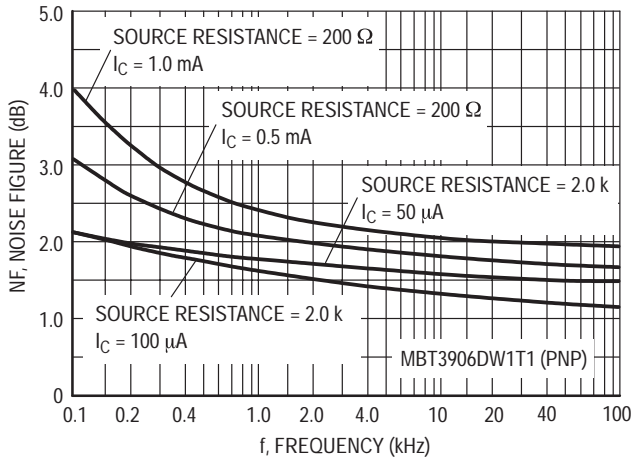


Figure 25.

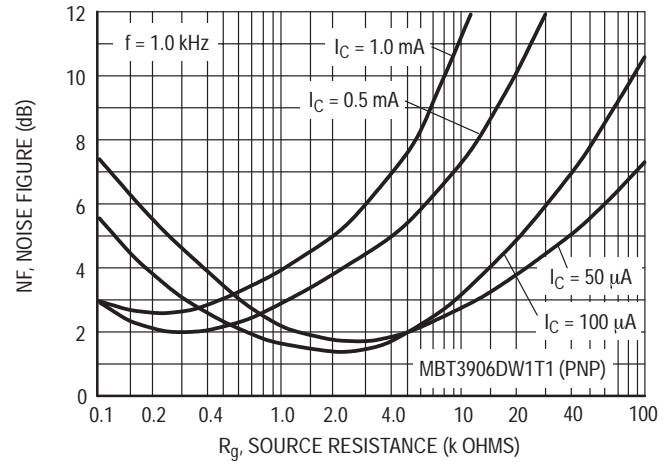


Figure 26.

h PARAMETERS

($V_{CE} = -10$ Vdc, $f = 1.0$ kHz, $T_A = 25^\circ\text{C}$)

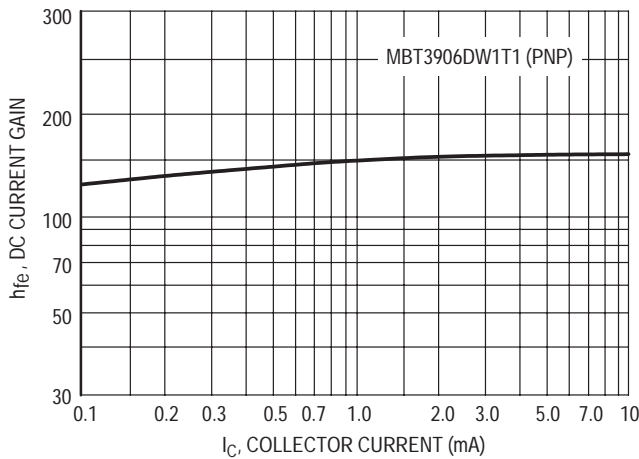


Figure 27. Current Gain

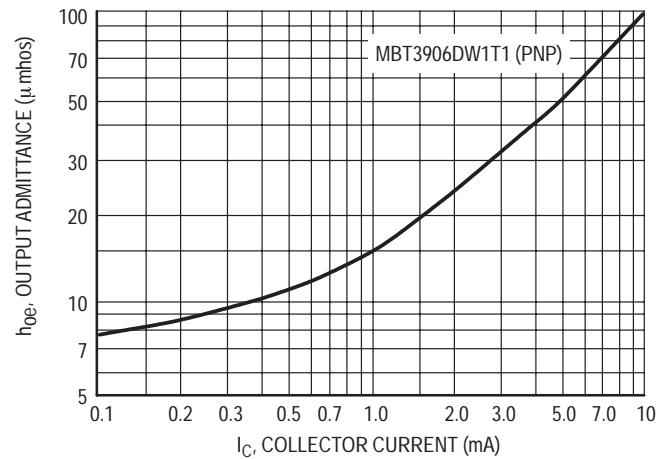


Figure 28. Output Admittance

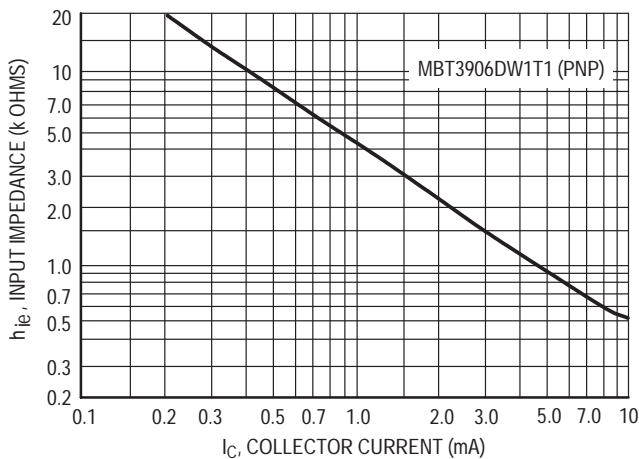


Figure 29. Input Impedance

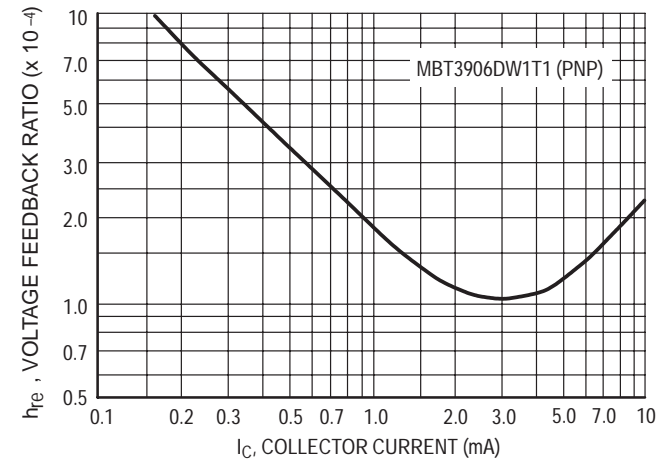


Figure 30. Voltage Feedback Ratio

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

MBT3906DW1T1 (PNP)

TYPICAL STATIC CHARACTERISTICS

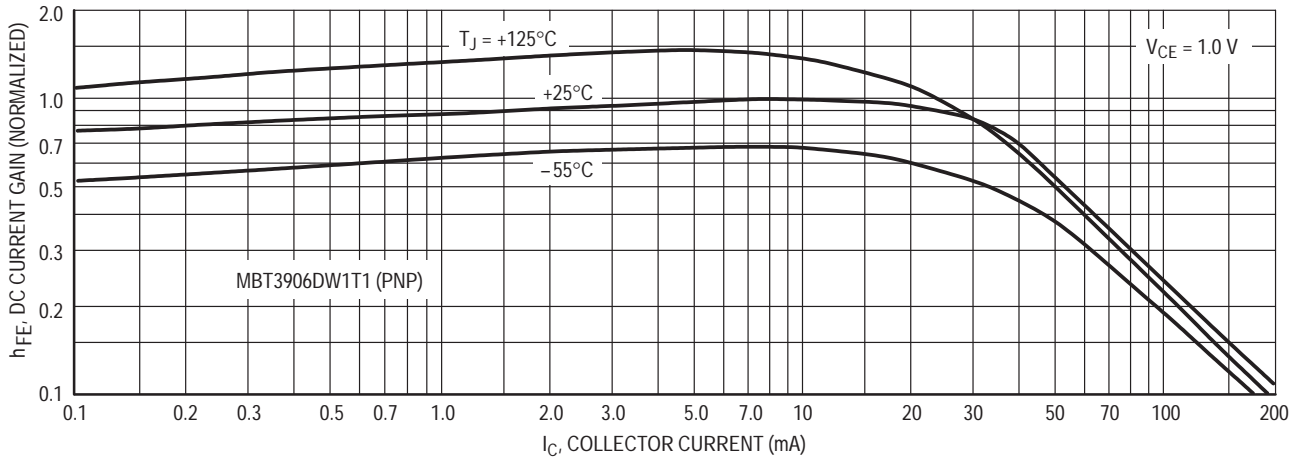


Figure 31. DC Current Gain

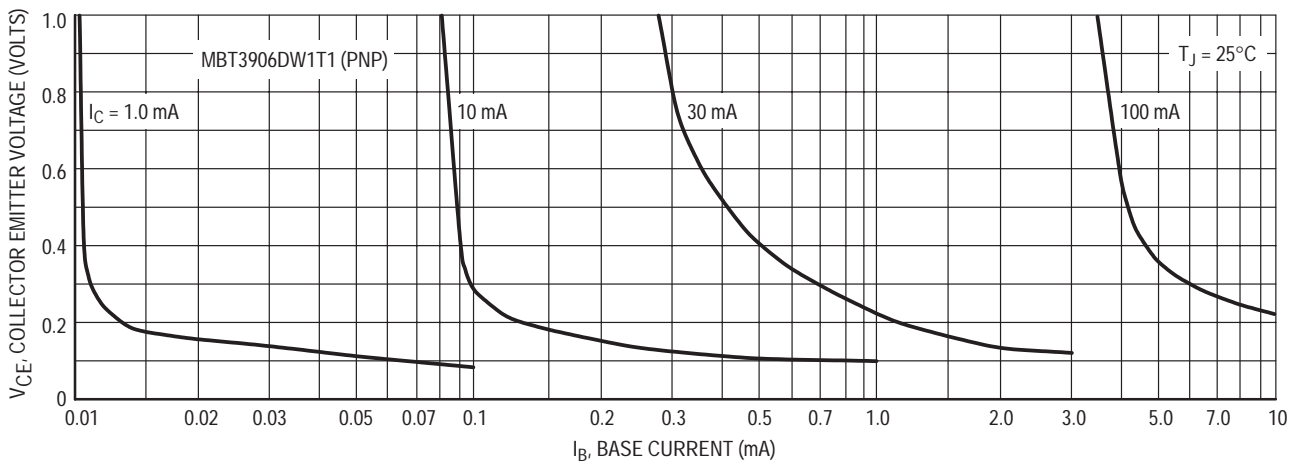


Figure 32. Collector Saturation Region

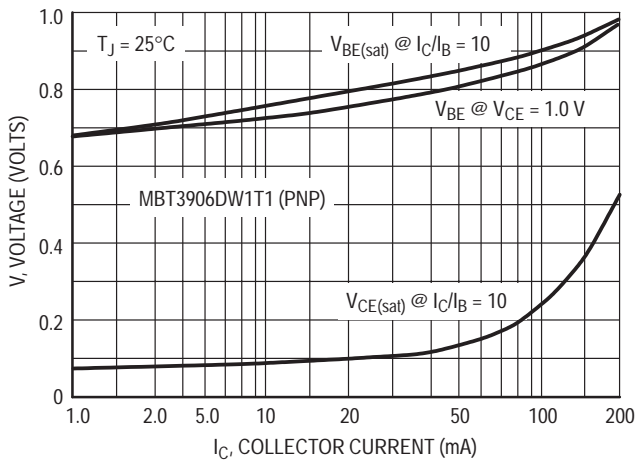


Figure 33. "ON" Voltages

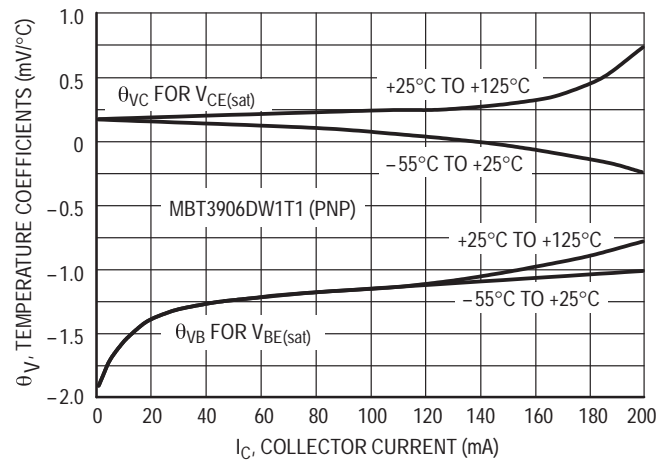


Figure 34. Temperature Coefficients


INFORMATION FOR USING THE SOT-363 SURFACE MOUNT PACKAGE

MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection

interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

SOT-363

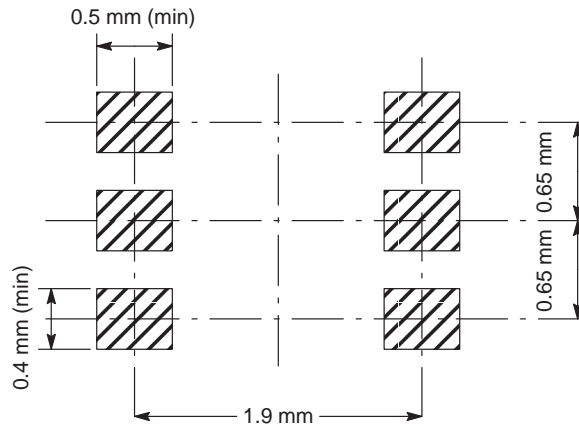

SOT-363 POWER DISSIPATION

The power dissipation of the SOT-363 is a function of the pad size. This can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by $T_{J(max)}$, the maximum rated junction temperature of the die, $R_{\theta JA}$, the thermal resistance from the device junction to ambient, and the operating temperature, T_A . Using the values provided on the data sheet for the SOT-363 package, P_D can be calculated as follows:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature T_A of 25°C, one can calculate the power dissipation of the device which in this case is 150 milliwatts.

$$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{833^\circ\text{C/W}} = 150 \text{ milliwatts}$$

The 833°C/W for the SOT-363 package assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 150 milliwatts. There are other alternatives to achieving higher power dissipation from the SOT-363 package. Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad™. Using a board material such as Thermal Clad, an aluminum core board, the power dissipation can be doubled using the same footprint.

SOLDERING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.


- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference shall be a maximum of 10°C.
- The soldering temperature and time shall not exceed 260°C for more than 10 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used as the use of forced cooling will increase the temperature gradient and result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling.

* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

MBT3904DW1T1, MBT3906DW1T1, MBT3946DW1T1

PACKAGE DIMENSIONS

SOT-363/SC-88
CASE 419B-01
ISSUE G

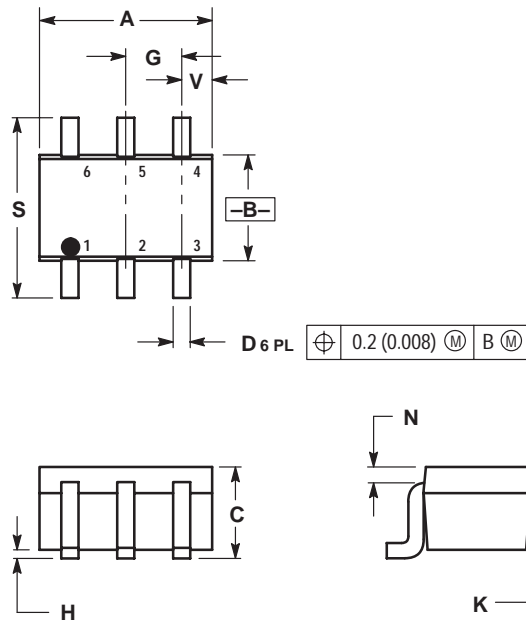


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.031	0.043	0.80	1.10
D	0.004	0.012	0.10	0.30
G	0.026 BSC		0.65 BSC	
H	---	0.004	---	0.10
J	0.004	0.010	0.10	0.25
K	0.004	0.012	0.10	0.30
N	0.008 REF		0.20 REF	
S	0.079	0.087	2.00	2.20
V	0.012	0.016	0.30	0.40

- STYLE 1:
PIN 1. EMITTER 2
2. BASE 2
3. COLLECTOR 1
4. EMITTER 1
5. BASE 1
6. COLLECTOR 2

Thermal Clad is a trademark of the Bergquist Company.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

North America Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

EUROPE: LDC for ON Semiconductor – European Support

German Phone: (+1) 303-308-7140 (M-F 2:30pm to 5:00pm Munich Time)

Email: ONlit-german@hibbertco.com

French Phone: (+1) 303-308-7141 (M-F 2:30pm to 5:00pm Toulouse Time)

Email: ONlit-french@hibbertco.com

English Phone: (+1) 303-308-7142 (M-F 1:30pm to 5:00pm UK Time)

Email: ONlit@hibbertco.com

ASIA/PACIFIC: LDC for ON Semiconductor – Asia Support

Phone: 303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)
Toll Free from Hong Kong 800-4422-3781

Email: ONlit-asia@hibbertco.com

JAPAN: ON Semiconductor, Japan Customer Focus Center

4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-8549

Phone: 81-3-5487-8345

Email: r14153@onsemi.com

Fax Response Line: 303-675-2167

800-344-3810 Toll Free USA/Canada

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local Sales Representative.

- [Press Room](#)
- [Sales & Distribution](#)
- [About Us](#)
- [Quality](#)
- [Trade Shows](#)
- [Investor Relations](#)
- [Employment](#)
- [Products](#)
 - [Product Catalog](#)
 - [New Products](#)
 - [ON/Cherry Products](#)
 - [Documentation](#)
 - [Selector Guide](#)
 - [On-line Ordering](#)
 - [Models](#)
 - [Reliability Data](#)
 - [PCN](#)
 - [Samples Search](#)
 - [Order Status](#)
 - [Tech Support](#)

Associated Documents

Item	Short Desc	Size
Data Sheet	Dual General Purpose Transistors	289

Device MBT3904DW1
Dual General Purpose Transistors

The MBT3904DW1T1, MBT3906DW1T1, and MBT3946DW1T1 are spin-offs of our popular SOT-23/SOT-323 three-leaded devices designed for general purpose amplifier applications and are available in a new SOT-363 six-leaded surface mount package. By putting two devices in one package, these devices are ideal for low-power surface mount applications where board space is at a premium.

Features:

- h_{FE} , 100–300
- Low $V_{CE(sat)}$, 30.4 V
- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- Available in 8 mm, 7-inch/3,000 Unit Tape and Reel
- Device Marking: MBT3904DW1T1 = MA
MBT3906DW1T1 = A2
MBT3946DW1T1 = 46

Orderable Parts

Action	Orderable Part	Short Desc.	Package Desc.	Pin Count	Case Outline	Specs
N/A	MBT3904DW1T1	Tape	SC-88	6	419B-01	A

			and (SOT-363)		
			Reel		
N/A	MBT3904DW1T3	Tape	SC-88	6	419B-01
		and	(SOT-363)		A
			Reel		

[Register](#) | [Site Index](#) | [Contact Us](#) | [Home](#) | [China Site](#)

[Products](#) | [Press Room](#) | [Sales](#) | [About](#) | [Investor](#) | [Employment](#)

© Semiconductor Components Industries, L.L.C., 1999, 2000. All rights reserved. [Terms of use.](#)

[Register](#) | [Site Index](#) | [Contact Us](#) | [Home](#) | [China Site](#)

[Press Room](#)
[Sales & Distribution](#)
[About Us](#)
[Quality](#)
[Trade Shows](#)
[Investor Relations](#)
[Employment](#)
Products
[Product Catalog](#)
[New Products](#)
[ON/Cherry Products](#)
[Documentation](#)
[Selector Guide](#)
[On-line Ordering](#)
[Models](#)
[Reliability Data](#)
[PCN](#)
[Samples Search](#)
[Order Status](#)
[Tech Support](#)

Associated Documents

Item	Short Desc	Size
Data Sheet	Dual General Purpose Transistors	289

Device MBT3906DW1
 Dual General Purpose Transistors

The MBT3904DW1T1, MBT3906DW1T1, and MBT3946DW1T1 are part of our popular SOT-23/SOT-323 three-leaded devices. They are ideal for low-power amplifier applications and are housed in the SOT-mount package. By putting two discrete devices in one package, they are ideal for low-power surface mount applications where board space is at a premium.

Features:

- h_{FE} , 100–300
- Low $V_{CE(sat)}$, 30.4 V
- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- Available in 8 mm, 7-inch/3,000 Unit Tape and Reel
- Device Marking: MBT3904DW1T1 = MA
 MBT3906DW1T1 = A2
 MBT3946DW1T1 = 46

Orderable Parts

Action	Orderable Part	Short Desc.	Package Desc.	Pin Count	C
Order Samples	MBT3906DW1T1	Tape and Reel	SC-88 and (SOT-363)	6	4

N/A	MBT3906DW1T3	Reel Tape SC-88 and (SOT-363) Reel	6	4
-----	--------------	---	---	-------------------

[Register](#) | [Site Index](#) | [Contact Us](#) | [Home](#) | [China Site](#)

[Products](#) | [Press Room](#) | [Sales](#) | [About](#) | [Investor](#) | [Employment](#)

© Semiconductor Components Industries, L.L.C., 1999, 2000. All rights reserved. [Terms of use.](#)