


Part number		RKJXU1210006	
Number of operating shafts		Single-shaft	
Shaft material		Resin	
Lever return mechanism		With	
Lever travel		2.0(+0.2, 0)mm	
Resistance taper		B	
Total resistance		10kΩ	
Operating temperature range		-10 to +70	
Electrical performance	Directional resolution	Continuous	
	Rated power	0.025W	
	Slider noise	300mV p-p max. by JIS method	
Mechanical performance	Directional operating force	0.75±0.3N	
	Lever return precision	8°	
	Actuator strength	Push/pull directions	100N/30N min. (Push/Pull)
		Operating direction	30mN•m
Durability	Operating life	2,000,000 cycles	
Environmental performance	Cold	-30±2 for 96h	
	Dry heat	80±2 for 96h	
	Damp heat	60±2, 90 to 95%RH for 96h	
3D CAD (STEP)		↓	
Certificate of Compliance to RoHS regulations		↓	

Photo



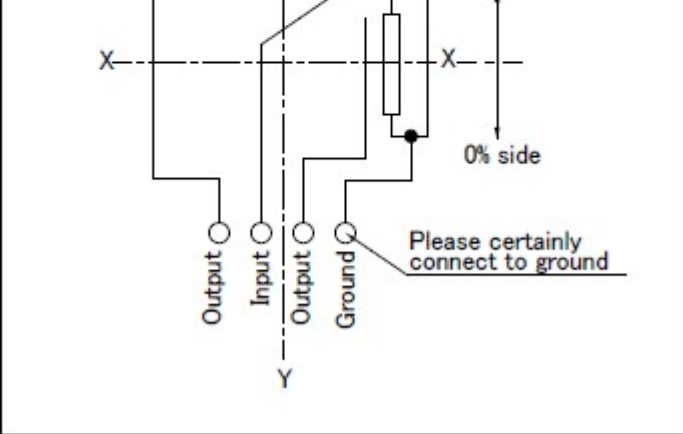

Packing Specifications

Tray

Number of packages (pcs.)	1 case / Japan	2,000
	1 case / export packing	2,000
Export package measurements (mm)		360×540×230

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).

Inquiries about Products

[▶ Inquiry](#)