



DIP4-pin type with current limiting and reinforced insulation

PhotoMOS®
GU 1 Form A
Current Limiting (AQY210HL)

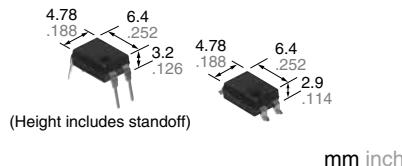

RoHS compliant

FEATURES

1. Current Limiting Function

To control an over current from flowing, the current limit function has been realized. It keeps an output current at a constant value when the current reaches a specified current limit value.

2. Enhances the capability of surge resistance between output terminals

The current limit function controls the ON time surge current to enhance the capability of surge resistance between output terminals.

3. Reinforced insulation of 5,000 Vrms

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

4. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

5. High sensitivity and low on-resistance

6. Low-level off state leakage current

TYPICAL APPLICATIONS

- Telephone equipment
- Modem

TYPES

I/O isolation voltage	Load voltage	Load current	Package	Part No.			Packing quantity			
				Through hole terminal		Surface-mount terminal				
				Tube packing style		Tape and reel packing style				
AC/DC dual use	Reinforced 5,000 Vrms	350 V	120 mA	DIP4-pin	AQY210HL	AQY210HLA	AQY210HLAX	AQY210HLAZ	1 tube contains: 100 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.

*Indicate the peak AC and DC values.

Note: For space reasons, only "210HL" is marked on the product. The three initial letters of the part number "AQY", the surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQY210HL(A)		Remarks
Input	LED forward current	I _F	50 mA		
	LED reverse voltage	V _R	5 V		
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P _{in}	75 mW		
Output	Load voltage (peak AC)	V _L	350 V		
	Continuous load current	I _L	0.12 A	Peak AC, DC	
	Power dissipation	P _{out}	500 mW		
Total power dissipation		P _T	550 mW		
I/O isolation voltage		V _{iso}	5,000 Vrms		
Ambient temperature	Operating	T _{opr}	−40 to +85°C −40 to +185°F		(Non-icing at low temperatures)
	Storage	T _{stg}	−40 to +100°C −40 to +212°F		

GU 1 Form A Current Limiting (AQY210HL)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY210HL(A)	Condition
Input	LED operate current	Typical Maximum	I_{Fon}	1.2 mA 3.0 mA
	LED turn off current			0.4 mA 1.1 mA
	LED dropout voltage	Minimum Typical	V_F	1.25 (1.14 V at $I_F = 5 \text{ mA}$) 1.5 V
				$I_F = 50 \text{ mA}$
Output	On resistance	Typical Maximum	R_{on}	20Ω 25Ω
	Off state leakage current	Maximum	I_{Leak}	1μA
	Current limit	Typical	—	0.18 A
Transfer characteristics	Turn on time*	Typical Maximum	T_{on}	0.5 ms 2.0 ms
	Turn off time*	Typical Maximum		0.08 ms 1.0 ms
	I/O capacitance	Typical Maximum	C_{iso}	0.8 pF 1.5 pF
	Initial I/O isolation resistance	Minimum	R_{iso}	1,000 MΩ
				500 V DC

*Turn on/Turn off time

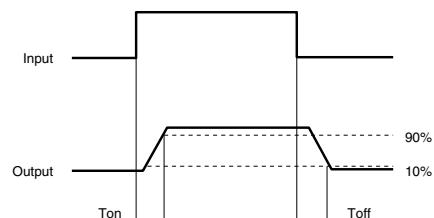

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Min.	Max.	Unit
LED current	I_F	5	30	mA
AQY210HL(A)	Load voltage (Peak AC)	V_L	—	V
	Continuous load current	I_L	—	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

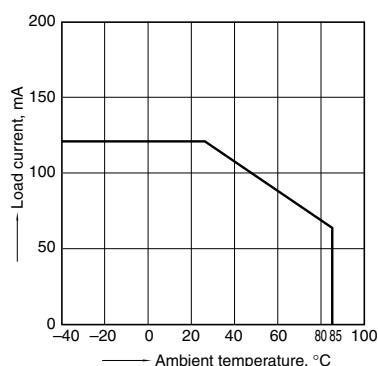


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4;
LED current: 5 mA; Load voltage: Max.(DC)
Continuous load current: Max.(DC)

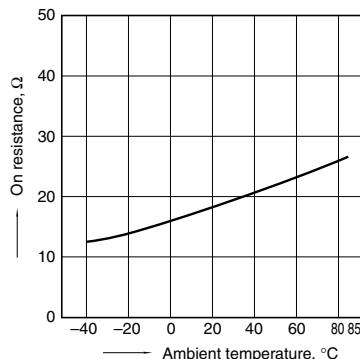


3. Turn on time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: Max.(DC);
Continuous load current: Max.(DC)

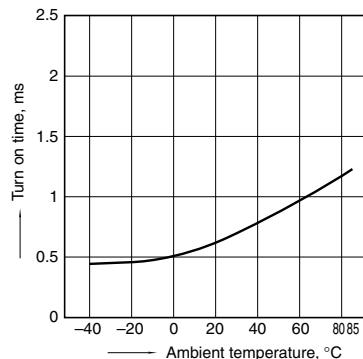


4. Turn off time vs. ambient temperature characteristics
LED current: 5 mA; Load voltage: Max.(DC); Continuous load current: Max.(DC)

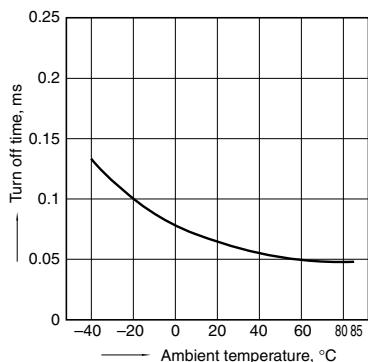


5. LED operate current vs. ambient temperature characteristics
Load voltage: Max.(DC); Continuous load current: Max.(DC)

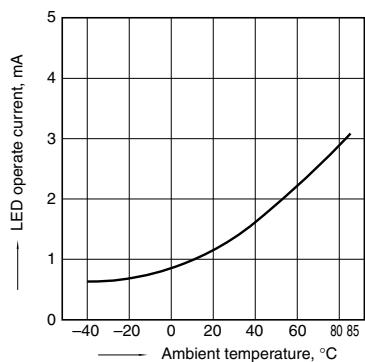


6. LED turn off current vs. ambient temperature characteristics
Load voltage: Max.(DC); Continuous load current: Max.(DC)

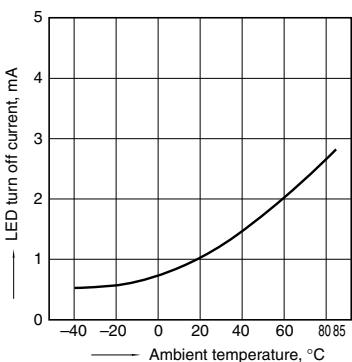


7. LED dropout voltage vs. ambient temperature characteristics
LED current: 5 to 50 mA

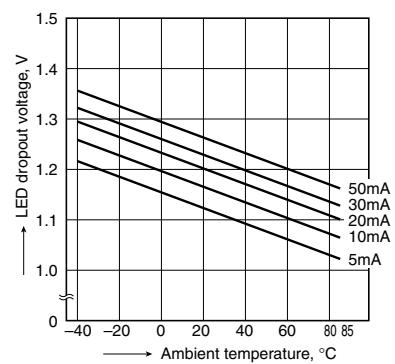

8. Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F

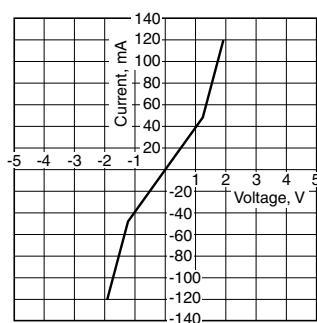


9. Off state leakage current vs. load voltage characteristics
Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F

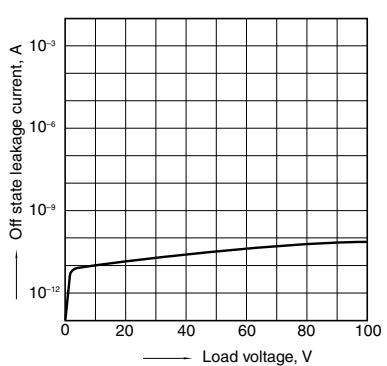


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4; Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

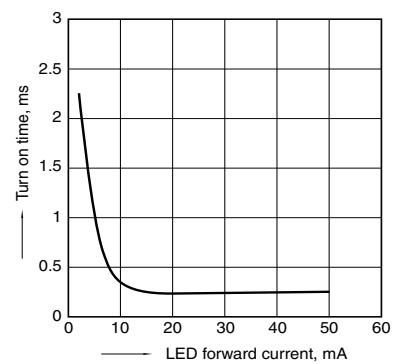


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4; Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

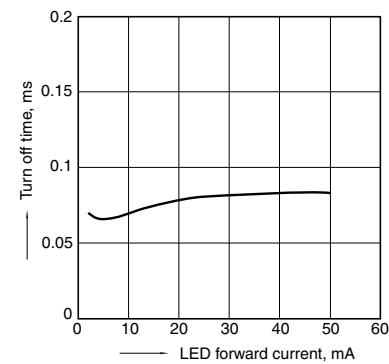

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

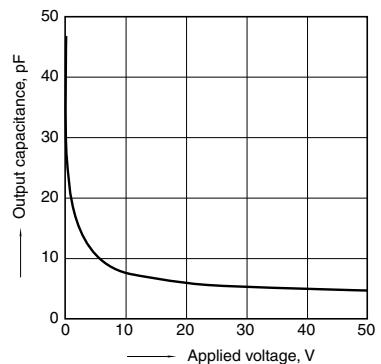

What is current limit


When a load current reaches the specified output control current, a current limit function works against the load current to keep the current a constant value. The current limit circuit built into the PhotoMOS thus controls the instantaneous load current to effectively ensure circuit safety.

This safety feature protects circuits downstream of the PhotoMOS against over-current.

But, if the current-limiting feature is used longer than the specified time, the PhotoMOS can be destroyed. Therefore, set the output loss to the max. rate or less.

- Comparison of output voltage and output current characteristics

V-I Characteristics

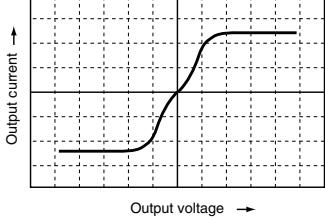

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017