

Slide Potentiometer > RS**K Series > RS60K11K9A13

Series Common Info

Master Type (K Fader) RS**K Series


| [Dimensions](#) | [Lever Dimensions](#) | [Circuit Diagram](#) | [Packing Specifications](#) |

PRINT


Part number		RS60K11K9A13
Number of resistor elements		Single-unit
Direction of lever		Vertical
Travel		60mm
Type		CP type
Lever type		9-T (T-Bar)
Length of lever		8.2mm
Total resistance		10kΩ
Resistance taper		15A
Operating temperature range		-10°C to +60°C
Electrical performance	Total resistance tolerance	±20%
	Maximum operating voltage	350V AC, 20V DC
	Rated power	0.25W
	Insulation resistance	100MΩ min. 250V DC
	Voltage proof	250V AC for 1 minute
Mechanical performance	Operating force	0.2±0.15N
	Stopper strength	100N
	Lever push-pull strength	100N
	Lever wobble (Both side)	1.312mm
	Lever deviation (One side)	0.5mm max.
Durability	Operating life	300,000 cycles
Minimum order unit (pcs.)	Japan	50
	Export	100




Dimensions

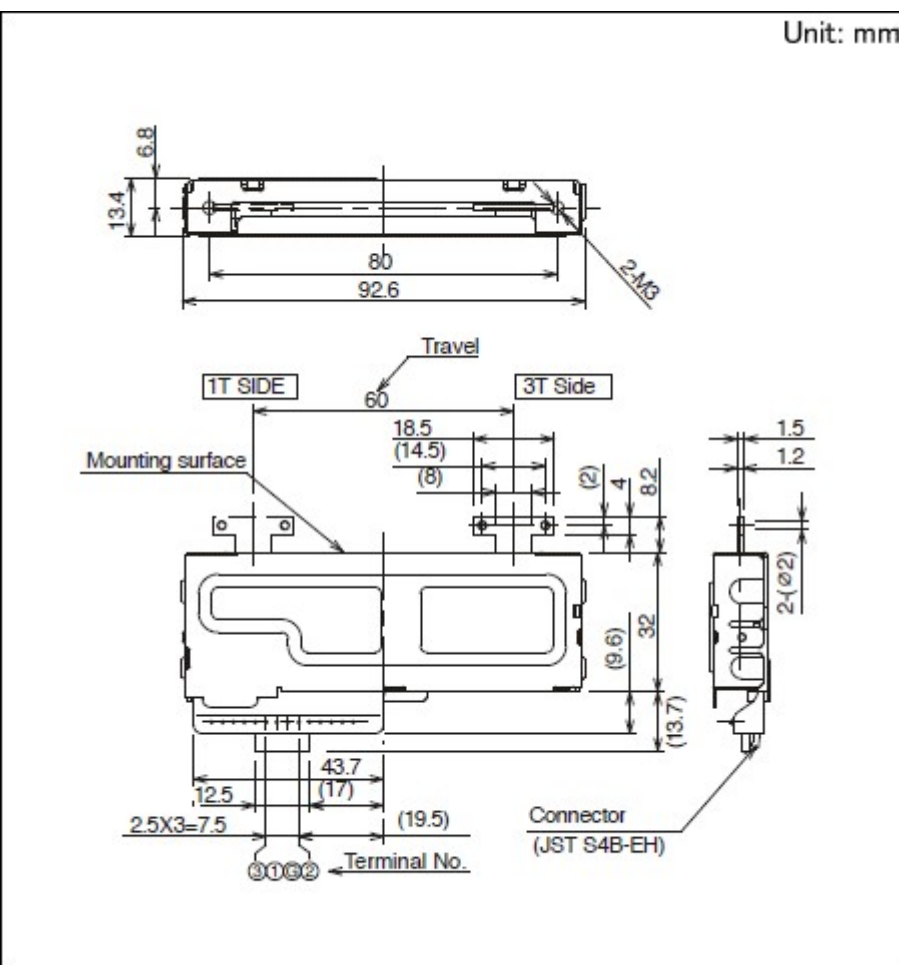


Lever Dimensions

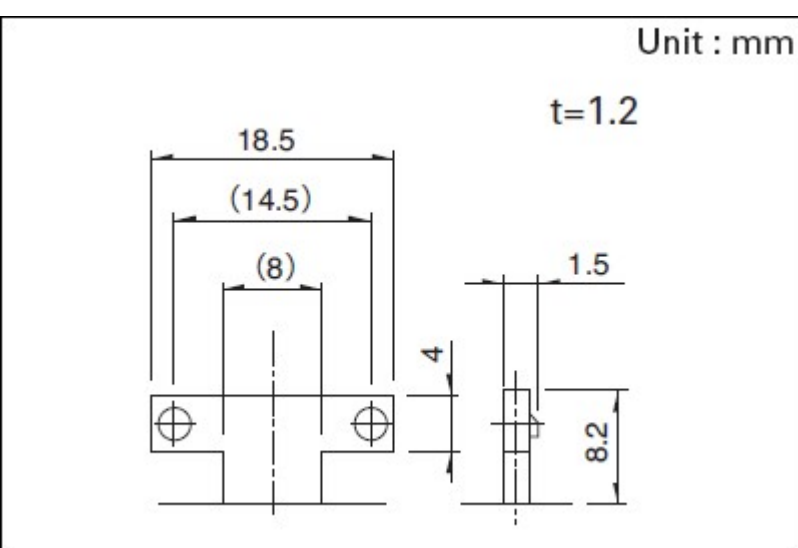

Circuit Diagram



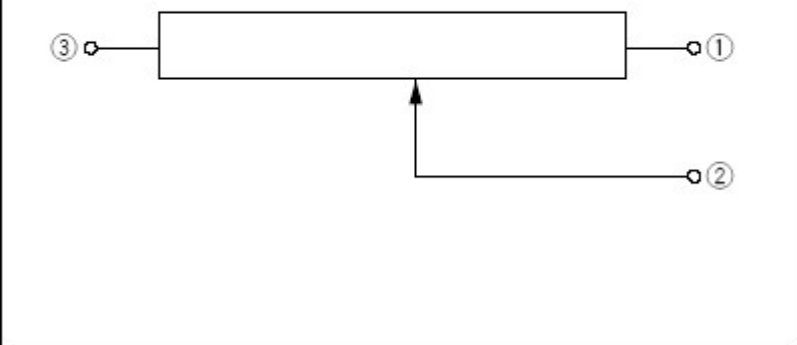

Packing Specifications

Bulk

Number of packages (pcs.)	1 case / Japan	50
	1 case / export packing	100
Export package measurements (mm)		292×520×190

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).
3. Products other than those listed in above products are also available. Please contact us for details.
4. "L" in the "Lever Wobble" column of the above table indicates the length of lever.

Inquiries about Products

 [Inquiry](#)