

| [Photo](#) | [Dimensions](#) | [Packing Specifications](#) |


PRINT

Part number		RKJXY1000006	
Number of operating shafts		Single-shaft	
Shaft material		Resin	
Lever return mechanism		With	
Potentiometer part	Maximum operating voltage		5V DC
	Operating angle		One side 15.5°±3.4°
	Resistance taper		B
	Total resistance		2kΩ
	Operating life		1,000,000cycles
Center push part	Center push	Without	
Operating temperature range		-10℃ to +70℃	
Electrical performance	Directional resolution		Continuous
	Rated power		0.025W
	Slider noise		300mV p-p max. by JIS method
Mechanical performance	Directional operating force		0.43±0.25N
	Lever return precision		±5°
	Actuator strength	Push/pull directions	100N min. (Push), 49N min. (Pull)
		Operating direction	50N
Environmental performance	Cold		-30℃ 96h
	Dry heat		80℃ 96h
	Damp heat		60℃, 90 to 95%RH 96h
Minimum order unit (pcs.)	Japan	2,000	
	Export	2,000	
3D CAD (STEP)			↓
Certificate of Compliance to RoHS regulations			↓

Photo



Dimensions

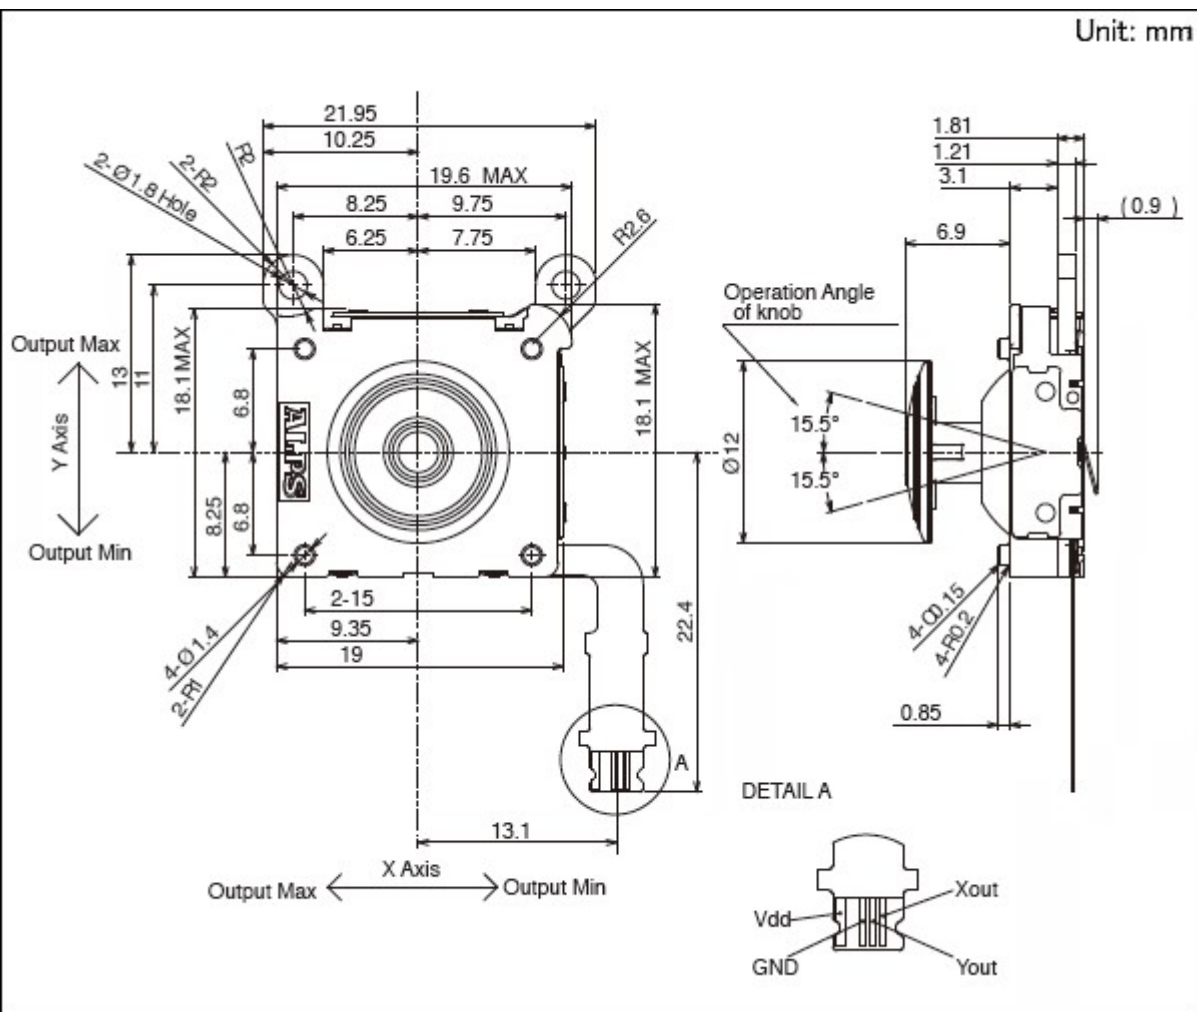

(Not including FPC)

Packing Specifications

Tray

Number of packages 1 case / Japan 2,000
(pcs.)

1 case / export
packing 2,000

Export package measurements (mm) 360×540×230

Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).

Inquiries about Products

 [Inquiry](#)