

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Sensor/actuator box, Application: Standard, Connection method: M12 socket Plastic, Number of slots: 8, Number of positions: 4, Slot assignment: Single, Status indication: Yes, pnp; Master cable connection: M23 plug connection 90°, Shielding: No

#### **Product Features**

- Safety in the field, thanks to molded housing and high degree of protection
- Flexible, distributed bundling of signals in one master cable
- ☑ Convenient: increased machine availability thanks to quick and easy diagnostics



## Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	137.2 GRM
Custom tariff number	85366990
Country of origin	Poland

### Technical data

#### General

Rated voltage	24 V DC
Max. operating voltage U <sub>max</sub>	30 V DC
Current carrying capacity per I/O signal	2 A
Current carrying capacity per slot	4 A
Total rated current	12 A
Number of positions	4
Number of slots	8
Inflammability class according to UL 94	V0
Sensor/actuator connection system	M12 socket

#### Ambient conditions

Degree of protection	IP65



# Technical data

### Ambient conditions

	IP67
Ambient temperature (operation)	-20 °C 75 °C

## Local diagnostics function

Local diagnostics	Supply voltage Green LED
	Status display I/O Yellow LED

### Master cable data/connection data

Connection method	M23 plug connection
Tightening torque slot sensor/actuator cable	0.4 Nm

#### Insulation material

Housing material	PA
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of threaded sleeve	PA
Material, O-ring	NBR

# Pin assignment

Slot/position = Wire color or connection	1 / 4 (A) = 1
	2 / 4 (A) = 2
	3 / 4 (A) = 3
	4 / 4 (A) = 4
	5 / 4 (A) = 5
	6 / 4 (A) = 6
	7 / 4 (A) = 7
	8 / 4 (A) = 8
	1-4 / 1 (+ 24 V) = 11
	1-4 / 3 (0 V) = 9+10
	1-4 / 5 (PE) = 12

## Classifications

# eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815



# Classifications

## eCl@ss

eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27449001

#### **ETIM**

ETIM 2.0	EC000200
ETIM 3.0	EC001856
ETIM 4.0	EC002585
ETIM 5.0	EC002585

## **UNSPSC**

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

# Approvals

Approvals	
-----------	--

Approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details



# Approvals

UL Recognized <b>\$1</b>	
mm²/AWG/kcmil	22-16
Nominal voltage UN	24 V

cUL Recognized				
mm²/AWG/kcmil	22-16			
Nominal voltage UN	24 V			

GOST 🕑		

cULus Recognized Sus		

# Accessories

Accessories

Assembly tool

Pipe spanner - PLUSCON-RCS - 1665062



Special pipe spanner, tool for mounting the M23 connector housing (with assembly), for coupling and sleeve housing

Circular connector (cable-side)



#### Accessories

Cable connector - CA-12S1N8A8007 - 1619708



Cable connector, straight, shielded: Yes, Screw locking, M23, Number of positions: 12, Type of contact: Socket, Crimp connection, Cable diameter: 6 mm ... 10 mm

Cable connector - CA-12S1N8A8008 - 1619645



Cable connector, straight, shielded: Yes, Screw locking, M23, Number of positions: 12, Type of contact: Socket, Crimp connection, Cable diameter: 10 mm ... 14.5 mm

#### Device marking

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 18 mm, Lettering field: 18 x 5 mm

#### Master cable, assembled

Master cable - RCK-TGUM/BL12/ 5,0PUR-U - 1684014



M23 socket, straight, 12-pos., with 5 m master cable, pin 9 and 10 bridged

Master cable - RCK-TGUM/BL12/10,0PUR-U - 1684027



M23 socket, straight, 12-pos., with 10 m master cable, pin 9 and 10 bridged



### Accessories

Master cable - RCK-TWUM/BL12/ 5,0PUR-U - 1684030



M23 socket, angled, 12-pos., with 5 m master cable, pin 9 and 10 bridged

Master cable - RCK-TWUM/BL12/10,0PUR-U - 1684043



M23 socket, angled, 12-pos., with 10 m master cable, pin 9 and 10 bridged

Female connector - V-RC/TGUM 11/KVD 11/LBL 12 - 1000041



M23 socket, 12-pos., straight, freely configurable, with solder connection, for external cable diameter of 8 mm ... 12 mm

Female connector - V-RC/TWUM 11/KVD 11/LBL 12 - 1000043



M23 socket, 12-pos., angled, freely configurable, with solder connection, for external cable diameter of 8 mm ... 12 mm

### Protective cap

Protective cap - MSK 1 - 1665897



M23 metal sealing cap, for unoccupied M23 connectors, without steel wire



### Accessories

Protective cap - MSK 2 - 1665907



M23 metal sealing cap, for unoccupied M23 connectors, with steel wire

Protective cap - KSK 1 - 1685013



Plastic sealing cap, for unoccupied M23 connectors

Screw plug - PROT-M12 - 1680539



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors

#### Screwdriver tools

Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

Tool - SACC BIT M12-D20 - 1208445



Nut for assembling SACC M12 connectors for free assembly, excluding M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive



### Accessories

T-distributor

Housing - RC-T 12/1BU2ST - 1685107



M23 T-distributor, 12-pos., with one M23 socket and two M23 plugs; position 9 and 10 bridged

### Torque tool

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

# **Drawings**

### Schematic diagram




Schematic diagram




M12 slot, socket, 4-pos.

M23 plug connection pin, 12-pos.

### Circuit diagram

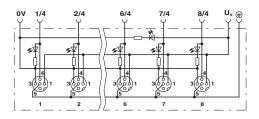



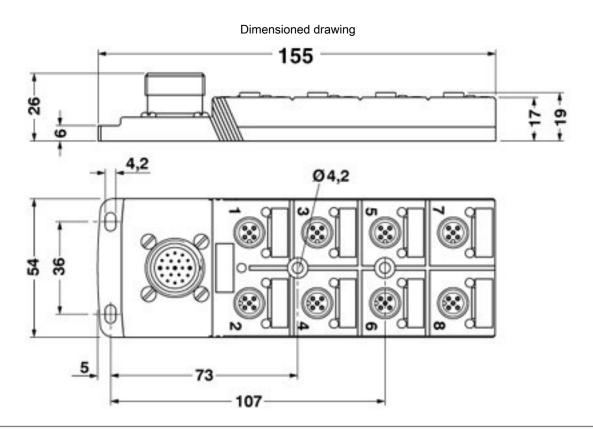

Phoenix Contact 2014 © - all rights reserved http://www.phoenixcontact.com