



Low-profile Tri-directional Operation Type SPVL Series

Poles	1	
Positions	1	
Terminal type	For PC board (Reflow)	
Operating force	0.35N max.	
Location lug	With	
Operating temperature range	-40°C to +85°C	
Rating (max.)/(min.) (Resistive load)	1mA 5V DC/50μ A 3V DC	
Electrical performance	Contact resistance (Initial/After operating life)	2 Ω max./5 Ω max.
	Insulation resistance	100MΩ min. 100V DC
	Voltage proof	100V AC for 1 minute
Mechanical performance	Terminal strength	1N for 1 minute
	Actuator strength	5N
Durability	Operating life without load	50,000 cycles 5 Ω max.
	Operating life with load Rating (max.) (Resistive load)	50,000 cycles 5 Ω max.
Environmental performance	Cold	-40°C 500h
	Dry heat	85°C 500h
	Damp heat	60°C, 90 to 95%RH 500h
Minimum order unit (pcs.)	Japan	5,000
	Export	20,000

Dimensions

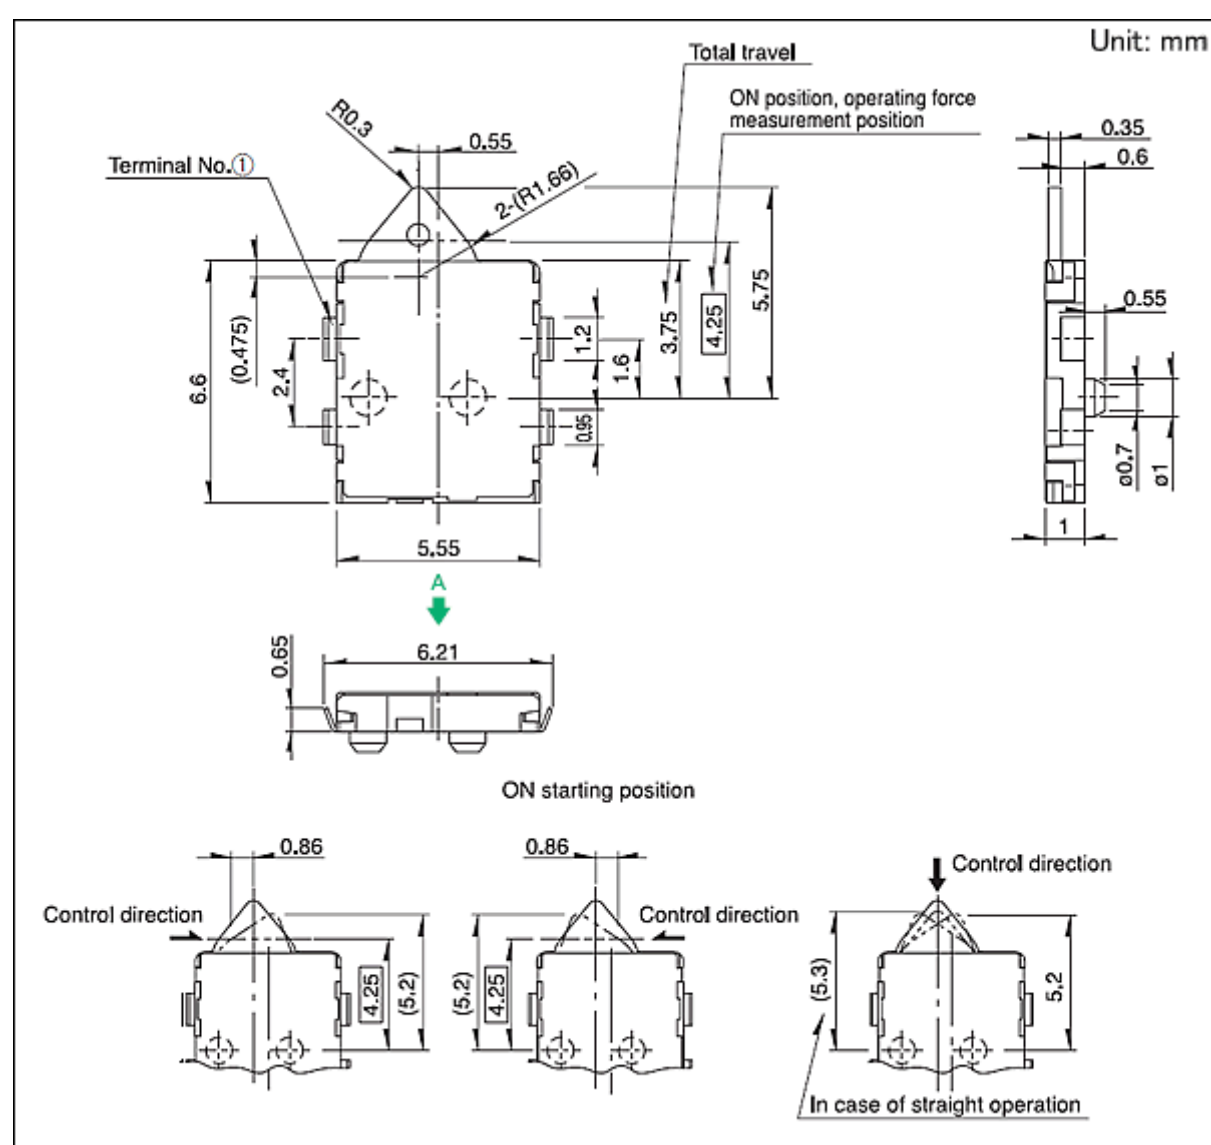


Land Dimensions

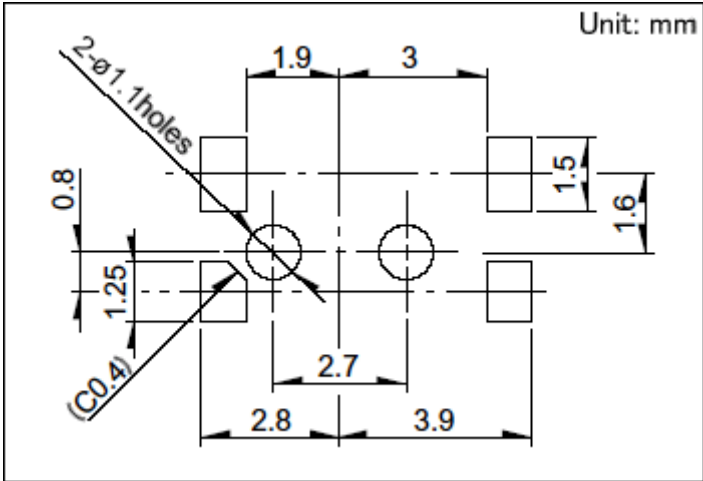


Viewed from direction A in the dimensions.


Terminal Layout

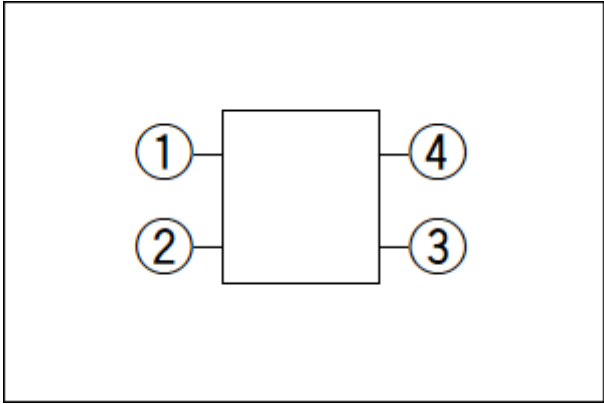

Circuit Diagram

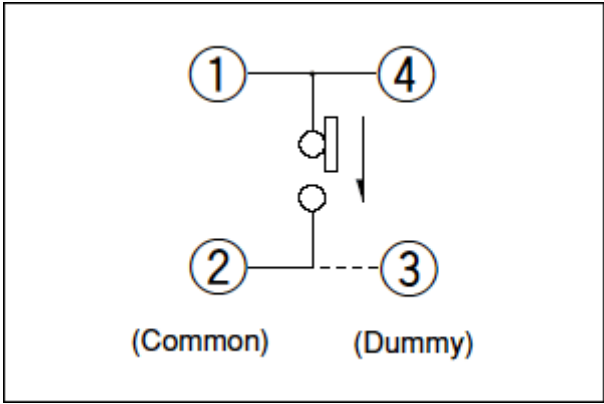


Packing Specifications

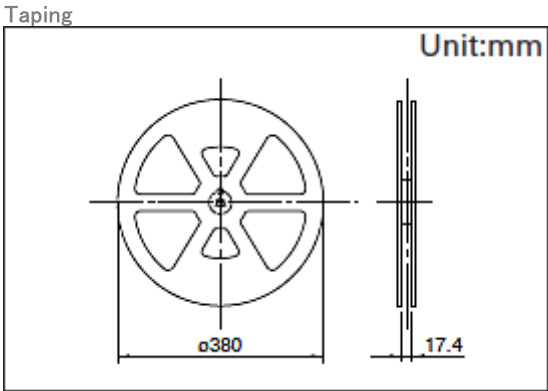

Number of packages (pcs.)	1 reel	5,000
	1 case / Japan	10,000
	1 case / export packing	20,000
Tape width (mm)	16	
Export package measurements (mm)	417 × 409 × 139	

Soldering Conditions

- Example of Reflow Soldering Condition
1. Heating method
Double heating method with infrared heater.
 2. Temperature measurement
Thermocouple 0.1 to 0.2VCA(K) or CC(T) at soldering portion (copper foil surface). A heat resisting tape should be used for fixed measurement.
 3. Temperature profile

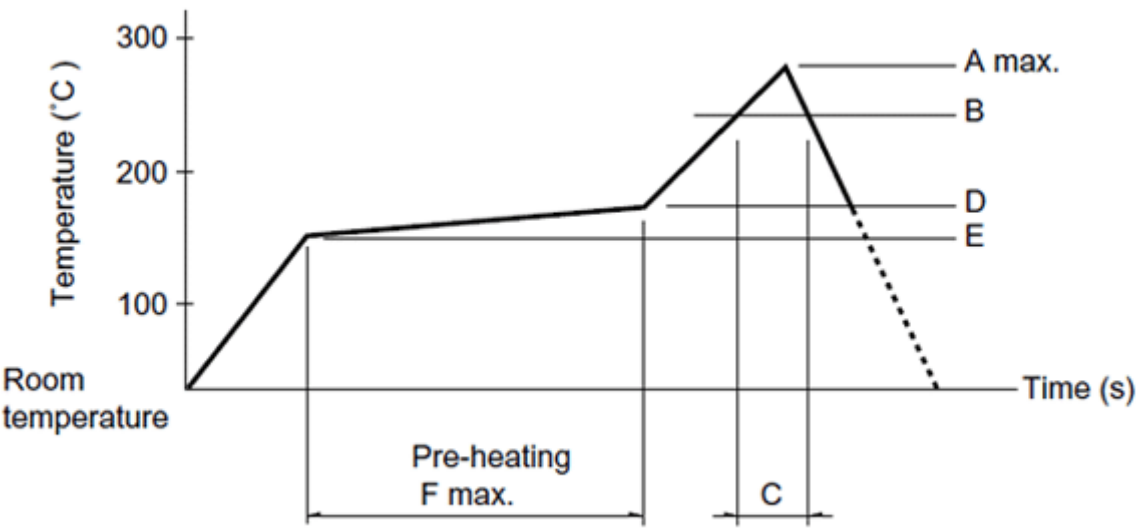

A(°C) 3s max.	B(°C)	C(s)	D(°C)	E(°C)	F(s)
260	230	40	180	150	120

(1) The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, surface depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.
(2) Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

Reference for Hand Soldering

Soldering temperature	350±5°C
Soldering time	3s max.

Notes are common to this series/models.

- 1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
- 2. Please place purchase orders per minimum order unit (integer).
- 3. This products can be used in vehicles.
Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.