

## RCK-TGUM/BL16+3/ 5,0PUR-U

Order No.: 1684056

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1684056>

Female connector M23, straight, 19-pos., with master cable 5 m

### Commercial data

EAN	4017918172060
Pack	1 pcs.
Customs tariff	85444290
Weight/Piece	1.2099 KG
Catalog page information	Page 128 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
05/02/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	150 V
Number of positions	19
Degree of protection	IP65/IP67
Ambient temperature (operation)	-40 °C ... 125 °C

#### Master cable data

Type of connection	M23 screw locking
Length of cable	5 m
Cable type	Master cable suitable for flexible cable conduit
Signal line cross section	16 x 0.5 mm <sup>2</sup>

AWG signal line	20
Conductor structure, signal line	64x 0.10 mm
Power supply cross section	3x 1 mm <sup>2</sup>
AWG power supply	17
Conductor structure, voltage supply	128x 0.10 mm
External diameter	11.6 mm
Max. bending cycles	1500000
Bending radius	120 mm
Traversing path	2 m
Traversing rate	2 m/s
Ambient temperature (operation)	-40 °C ... 90 °C (for fixed installation) -5 °C ... 80 °C (for flexible installation)

#### **Insulation material**

Housing material	PUR
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of the contact carrier on the master cable side	PA

#### **Anschlussbelegung**


Steckplatz/Pol = Pin = Aderfarbe	1 / 4 (A) = 15 = WH
----------------------------------	---------------------

	1 / 2 (B) = 7 = GY/PK
	2 / 4 (A) = 5 = GN
	2 / 2 (B) = 4 = RD/BU
	3 / 4 (A) = 16 = YE
	3 / 2 (B) = 8 = WH/GN
	4 / 4 (A) = 3 = GY
	4 / 2 (B) = 14 = BN/GN
	5 / 4 (A) = 17 = PK
	5 / 2 (B) = 9 = WH/YE
	6 / 4 (A) = 2 = RD
	6 / 2 (B) = 13 = YE/BN
	7 / 4 (A) = 11 = BK
	7 / 2 (B) = 10 = WH/GY
	8 / 4 (A) = 1 = VT
	8 / 2 (B) = 18 = GY/BN
	1-8 / 1 (+ 120 V) = 19 = BN
	1-8 / 3 (0 V) = 6 = BU
	1-8 / 5 (PE) = 12 = GN/YE

**Drawings**

Schematic diagram

Pin assignment M23 socket, 19-pos., female side view

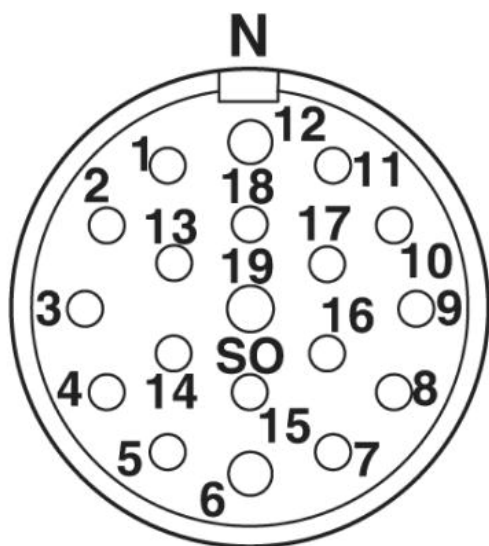

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;