





SMT POWER INDUCTORS

Toroid - Bobcat Series



-  **Height:** 5.5mm Max
-  **Footprint:** 12.7mm x 12.7mm Max
-  **Current Rating:** up to 3.8A
-  **Inductance Range:** 9.4µH to 439µH




Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C ¹¹

Part Number ^{9,10}	Inductance @ Irated (µH)	Irated (A)	DCR (mΩ)		ET (V-µsec)	Inductance @ 0A _{DC} (µH ±20%)	100 Gauss ET ₁₀₀ (V-µsec)	1 Amp DC H _i (Orsted)
			TYP	MAX				
P0144NL	9.4	3.80	27	31	15.2	10.4	2.65	11.95
P0145NL	13.3	3.13	40	46	18.8	14.6	3.13	14.12
P0146NL	23	2.43	65	75	24.3	25	4.10	18.46
P0147NL	50	1.65	121	139	37.0	56	6.15	27.69
P0148NL	75	1.35	181	208	44.3	83	7.47	33.67
P0149NL	90	1.23	246	283	49.2	100	8.19	36.93
P0150NL	137	0.99	387	445	59.4	152	10.12	45.61
P0151NL	200	0.81	585	673	71.3	220	12.17	54.85
P0152NL	305	0.65	845	972	85.8	331	14.94	67.34
P0153NL	439	0.53	1322	1520	99.6	472	17.83	80.37

- NOTES:**
- The reference inductance at rated DC current is a typical value.
 - Temperature rise is 50°C in typical buck or boost circuits at 250kHz and with the reference ET applied to the inductor.
 - Total loss in the inductor is 380mW for 50°C temperature rise above ambient.
 - To estimate temperature rise in a given application, determine copper and core losses, divide by 380 and multiply by 50.
 - For the copper loss (mW), calculate $I_{DC}^2 \times R_{DC}$.
 - For core loss (mW), using frequency (f in Hertz) and operating flux density (B in Gauss), calculate $6.11 \times 10^{-18} \times B^{2.7} \times f^{2.04}$.
 - For flux density (B in Gauss), calculate ET (V-µsec) for the application, divide by ET₁₀₀ from the table, and multiply by 100.
 - Limit the DC bias (H) to 46 orstedts. Calculate H by multiplying H_i from the table by I_{DC} of the application.
 - Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. P0144NL becomes P0144NLT). Pulse complies to industry standard tape and reel specification EIA481.
 - The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.
 - The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

Mechanical

Schematic

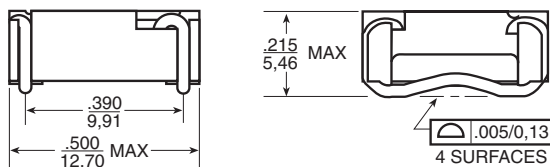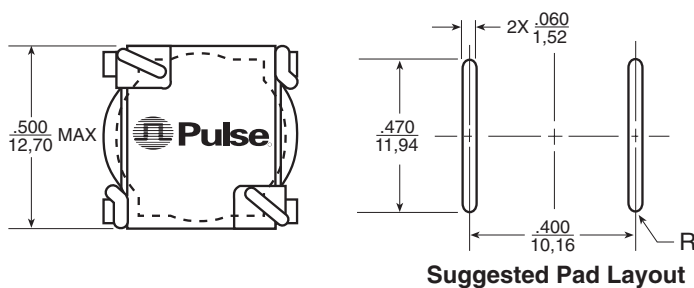

Weight 1.5 grams
 Tape & Reel 500/reel
 Tube 40/tube
 Dimensions: Inches
 mm

Unless otherwise specified, all tolerances are ± .010 / 0,25

