

SINGLE OPERATIONAL AMPLIFIERS

The KA741 series are general purpose operational amplifiers which feature improved performance over industry standards like the KA709. It is intended for a wide range of analog applications. The high gain and wide range of operating voltage provide superior performance in integrator, summing amplifier, and general feedback applications.


FEATURES

- Short circuit protection
- Excellent temperature stability
- Internal frequency compensation
- High input voltage range
- Null of offset


8 DIP



8 SOP




BLOCK DIAGRAM



ORDERING INFORMATION

Device	Package	Operating Temperature
KA741E KA741	8 DIP	0 ~ +70°C
KA741ED KA741D	8 SOP	
KA741I KA741EI	8 DIP	-40 ~ +85°C
KA7411ID KA741EID	8 SOP	

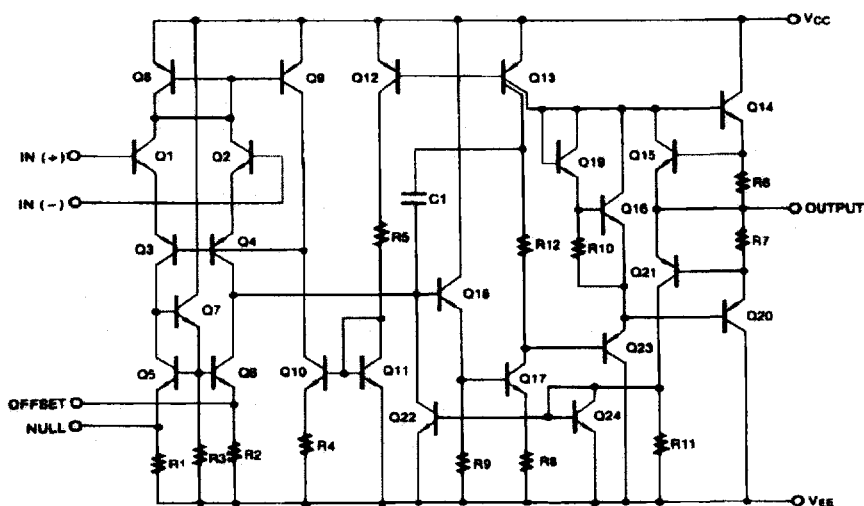SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

Characteristic	Symbol	KA741	KA741E	KA741I	Unit
Supply Voltage	V_{CC}	± 18	± 22	± 18	V
Differential Input Voltage	$V_{I(DIFF)}$	± 30	± 30	± 30	V
Input Voltage	V_I	± 15	± 15	± 15	V
Output Short Circuit Duration		Indefinite	Indefinite	Indefinite	
Power Dissipation	P_D	500	500	500	mW
Operating Temperature Range	T_{OPR}	$0 \sim +70$	$0 \sim +70$	$-40 \sim +85$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-65 \sim +150$	$-65 \sim +150$	$-65 \sim +150$	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

($V_{CC} = 15\text{V}$, $V_{EE} = -15\text{V}$, $T_A = 25^\circ\text{C}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	KA741E			KA741I/KA741I			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V_{IO}	$R_S \leq 10\text{K}\Omega$					2.0	6.0	mV
		$R_S \leq 50\Omega$		0.8	3.0				
Input Offset Voltage Adjustment Range	$V_{IO(R)}$	$V_{CC} = \pm 20\text{V}$	± 10				± 15		mV
Input Offset Current	I_{IO}			3.0	30		20	200	nA
Input Bias Current	I_{BIAS}			30	80		80	500	nA
Input Resistance	R_I	$V_{CC} = \pm 20\text{V}$	1.0	6.0		0.3	2.0		$\text{M}\Omega$
Input Voltage Range	$V_{I(R)}$		± 12	± 13		± 12	± 13		V
Large Signal Voltage Gain	G_V	$R_L \geq 2\text{K}\Omega$							V/mV
		$V_{CC} = \pm 20\text{V}$, $V_{O(P,P)} = \pm 15\text{V}$	50						
		$V_{CC} = \pm 15\text{V}$, $V_{O(P,P)} = \pm 10\text{V}$				20	200		
Output Short Circuit Current	I_{SC}		10	25	35		25		mA
Output Voltage Swing	$V_{O(P,P)}$	$V_{CC} = \pm 20\text{V}$							V
		$R_L \geq 10\text{K}\Omega$	± 16						
		$R_L \geq 10\text{K}\Omega$	± 15						
		$V_{CC} = \pm 15\text{V}$				± 12	± 14		
Common Mode Rejection Ratio	CMRR	$R_S \leq 10\text{K}\Omega$, $V_{CM} = \pm 12\text{V}$				70	90		dB
		$R_S \leq 50\text{K}\Omega$, $V_{CM} = \pm 12\text{V}$	80	95					
Power Supply Rejection Ratio	PSRR	$V_{CC} = \pm 15\text{V}$ to $V_{CC} = \pm 15\text{V}$ $R_S \leq 50\Omega$	86	96					dB
		$V_{CC} = \pm 15\text{V}$ to $V_{CC} = \pm 15\text{V}$ $R_S \leq 10\text{K}\Omega$				77	96		

ELECTRICAL CHARACTERISTICS (Continued)

Characteristic		Symbol	Test Conditions	KA741E			KA741/KA741I			Unit
				Min	Typ	Max	Min	Typ	Max	
Transient Response	Rise Time	t_r	Unity Gain		0.25	0.8		0.3		μs
	Overshoot	OS			6.0	20		10		%
Bandwidth		BW		0.43	1.5					MHz
Slew Rate		SR	Unity Gain	0.3	0.7			0.5		V/ μs
Supply Current		I_{CC}	$R_L = \infty \Omega$					1.5	2.8	mA
Power Consumption		P_C	$V_{CC} = \pm 20V$		80	150				mW
			$V_{CC} = \pm 15V$					50	85	

ELECTRICAL CHARACTERISTICS

($-40^\circ C \leq T_A \leq 85^\circ C$ for the KA741I, $0 \leq T_A \leq 70^\circ C$ for the KA741 and KA741E. $V_{CC} = \pm 15V$, unless otherwise specified)

Characteristic		Symbol	Test Conditions	KA741E			KA741/KA741I			Unit
				Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage		V_{IO}	$R_S \leq 50\Omega$			4.0				mV
			$R_S \leq 10K\Omega$						7.5	
Input Offset Voltage Drift		$\Delta V_{IO}/\Delta T$			15					$\mu V/^\circ C$
Input Offset Current		I_{IO}				70			300	nA
Input Offset Current Drift		$\Delta I_{IO}/\Delta T$				0.5				nA/ $^\circ C$
Input Bias Current		I_{BIAS}				0.21			0.8	μA
Input Resistance		R_i	$V_{CC} = \pm 20V$	0.5						M Ω
Input Voltage Range		$V_{I(R)}$		± 12	± 13		± 12	± 13		V
Output Voltage Swing		$V_{O(P,P)}$	$V_{CC} = \pm 20V$ $R_S \geq 10K\Omega$	± 16						V
			$R_S \geq 2K\Omega$	± 15						
			$V_{CC} = \pm 15V$ $R_S \geq 10K\Omega$				± 12	± 14		
			$R_S \geq 2K\Omega$				± 10	± 13		
Output Short Circuit Current		I_{SC}		10		40	10		40	mA
Common Mode Rejection Ratio		CMRR	$R_S \leq 10K\Omega$, $V_{CM} = \pm 12V$				70	90		dB
			$R_S \leq 50K\Omega$, $V_{CM} = \pm 12V$	80	95					
Power Supply Rejection Ratio		PSRR	$V_{CC} = \pm 20V$ to $\pm 5V$ $R_S \leq 50\Omega$	86	96					dB
			$R_S \leq 10K\Omega$				77	96		
Large Signal Voltage Gain		G_V	$R_S \geq 2K\Omega$ $V_{CC} = \pm 20V$, $V_{O(P,P)} = \pm 15V$	32						V/mV
			$V_{CC} = \pm 15V$, $V_{O(P,P)} = \pm 10V$				15			
			$V_{CC} = \pm 15V$, $V_{O(P,P)} = \pm 2V$	10						

TYPICAL PERFORMANCE CHARACTERISTICS

Fig. 7 OUTPUT RESISTANCE vs FREQUENCY

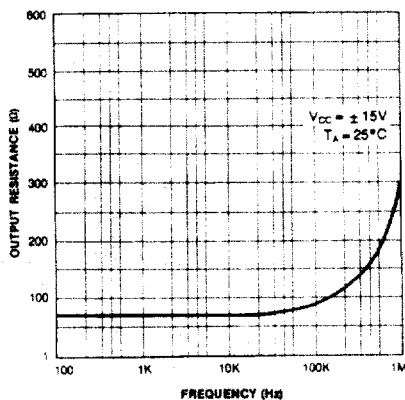


Fig. 8 INPUT RESISTANCE AND INPUT CAPACITANCE vs FREQUENCY

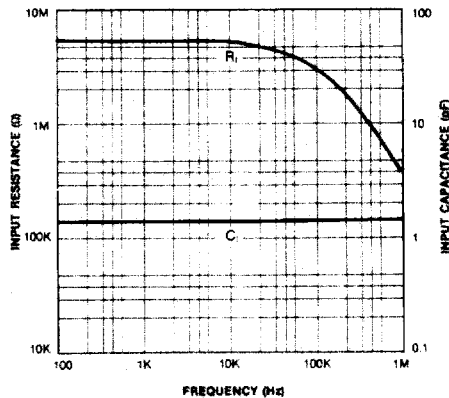


Fig. 9 INPUT BIAS CURRENT vs AMBIENT TEMPERATURE

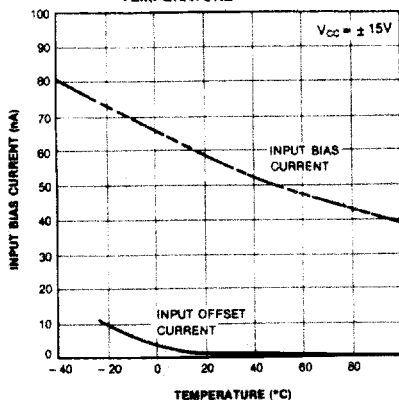


Fig. 10 POWER CONSUMPTION vs AMBIENT TEMPERATURE

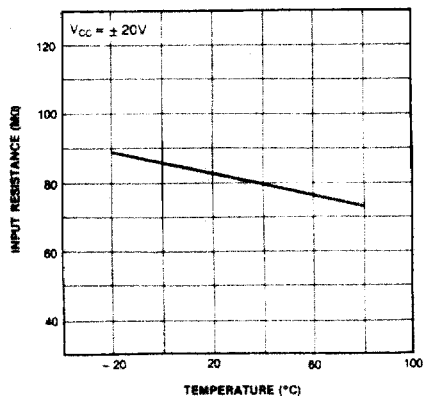


Fig. 11 INPUT OFFSET CURRENT vs AMBIENT TEMPERATURE

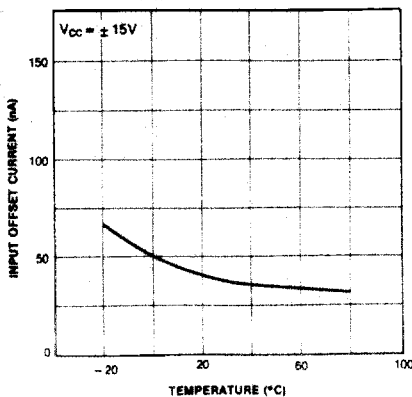


Fig. 12 INPUT RESISTANCE vs AMBIENT TEMPERATURE

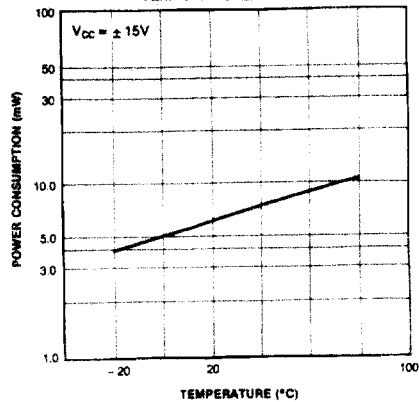


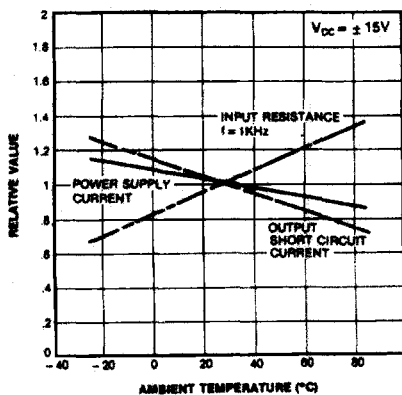
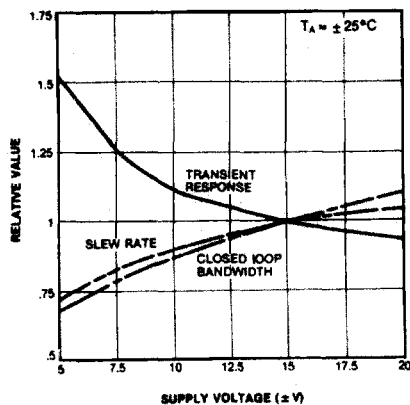
Fig. 13 NORMALIZED DC PARAMETERS
vs AMBIENT TEMPERATUREFig. 15 FREQUENCY CHARACTERISTICS
vs SUPPLY VOLTAGE

Fig. 17 TRANSIENT RESPONSE

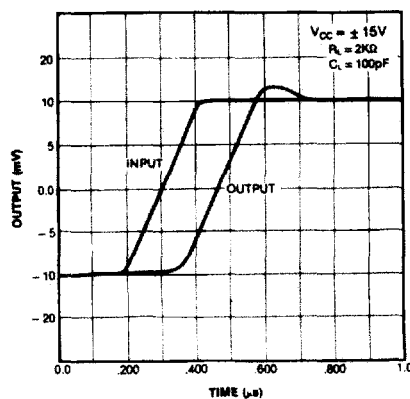
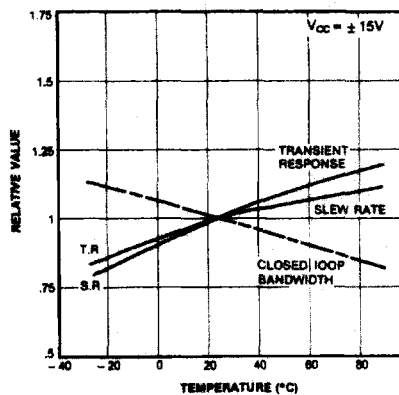
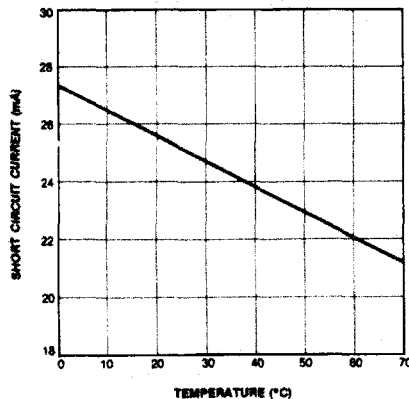
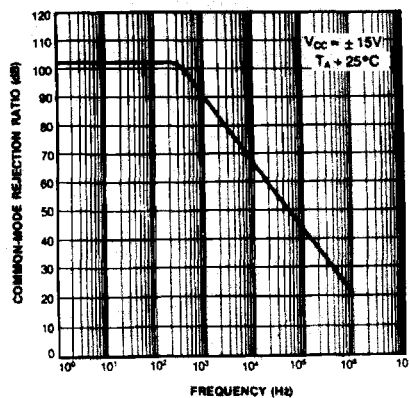
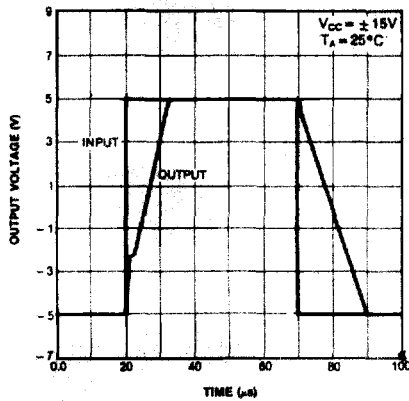
Fig. 14 FREQUENCY CHARACTERISTICS
vs AMBIENT TEMPERATUREFig. 16 OUTPUT SHORT CIRCUIT CURRENT
vs AMBIENT TEMPERATUREFig. 18 COMMON-MODE REJECTION RATIO
vs FREQUENCY

Fig. 18 VOLTAGE FOLLOWER LARGE
SIGNAL PULSE RESPONSEFig. 19 OUTPUT SWING AND INPUT RANGE
vs SUPPLY VOLTAGE