

# **SAW Components**

SAW RF filter for base stations

Band 3 downlink

Series/type: B5330

Ordering code: B39182B5330U410

Date: Apr 23, 2015

Version: 2.0

© EPCOS AG 2015. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.



SAW Components

B5330

SAW RF filter 1842.5 MHz

#### **Data sheet**

## SMD


## **Application**

- RF filter for band 3 downlink
- Unbalanced to unbalanced operation
- Low amplitude ripple
- Usable passband 75 MHz
- No matching required for operation at 50  $\Omega$




#### **Features**

- Package size 3.0 x 3.0 x 1.1 mm<sup>3</sup>
- Package code DCC6C
- RoHS compatible
- Approximate weight 0.037 g
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 1
- Filter surface passivated

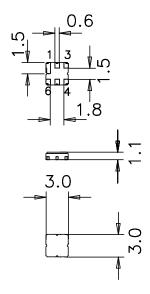

### Pin configuration

- 2 Input
- 5 Output
- 1, 3, 4, 6 To be grounded

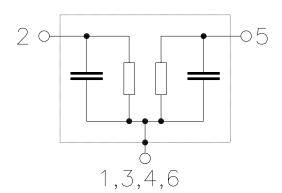



**SAW Components** 

B5330

SAW RF filter 1842.5 MHz

**Data sheet** 

SMD

#### **Characteristics**

Temperature range for specification:  $T = -40 \,^{\circ}\text{C}$  to +85  $^{\circ}\text{C}$ 

Terminating source impedance:  $Z_S = 50 \Omega$ Terminating load impedance:  $Z_L = 50 \Omega$ 

			min.	typ. @ 25 °C	max.	
Center frequency		f <sub>C</sub>	_	1842.5	_	MHz
Maximum insertion attenuation 1805.0 1880.0	MHz	$\alpha_{max}$	_	3.0	3.5	dB
<b>Amplitude ripple</b> (p-p) 1805.0 1880.0	MHz	Δα	_	0.6	0.8	dB
Input return loss 1805.0 1880.0	MHz		7	10	_	dB
Output return loss 1805.0 1880.0	MHz		7	11	_	dB
<b>Relative attenuation</b> (relative to $\alpha_{mi}$ 10.0 420.0 420.0 1500.0		$lpha_{rel}$	30 25	35 30	_ _	dB dB
2110.0 2690.0 2690.0 3800.0 3800.0 6000.0	MHz MHz MHz		25 25 10	30 30 15	_ _ _	dB dB dB



SAW Components B5330
SAW RF filter 1842.5 MHz

**Data sheet** 



## **Maximum ratings**

Operable temperature range	Т	-45/+125	°C	
Storage temperature range	$T_{stg}$	-45/+125	°C	
DC voltage	$V_{DC}$	5	V	
ESD voltage	$V_{ESD}$	50 <sup>1)</sup>	V	Machine Model
		1002)	V	Human Body Model
		250 <sup>3)</sup>	V	Charged Device Model
Input power	$P_{IN}$			
1805.0 1880.0 MHz	-	15	dBm	cw, 1000 h, 85 °C

<sup>1)</sup> acc. to JESD22-A115B (MM - Machine Model), 10 negative & 10 positive pulses

<sup>&</sup>lt;sup>2)</sup> acc. to JESD22-A114F (HBM - Human Body Model), 1 negative & 1 positive pulse

<sup>&</sup>lt;sup>3)</sup> acc. to JESD22-C101C (CDM - Field Induced Charged Device Model), 3 negative & 3 positive pulses




SAW Components B5330
SAW RF filter 1842.5 MHz


**Data sheet** 



## Transfer function (S21, narrowband)

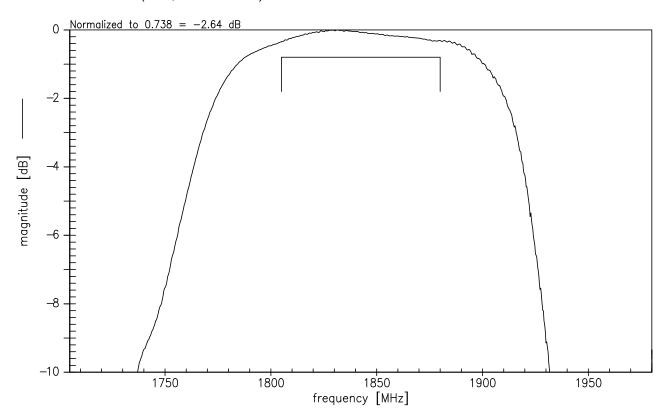

## Transfer function (S21, wideband)

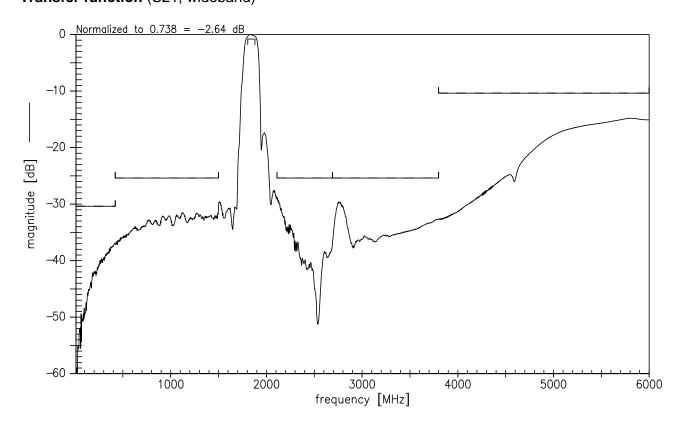




SAW Components B5330
SAW RF filter 1842.5 MHz

SMD


Data sheet

**Smith charts** 

S<sub>11</sub> function

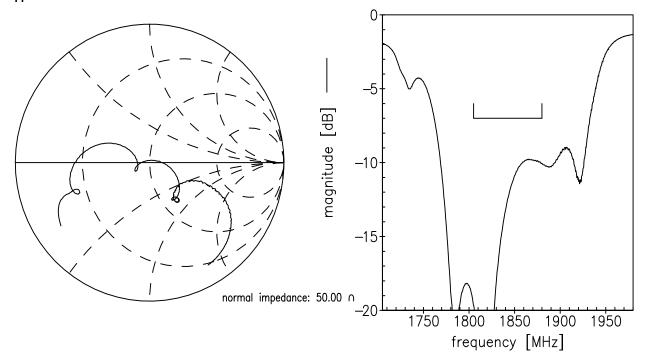

# S<sub>22</sub> function

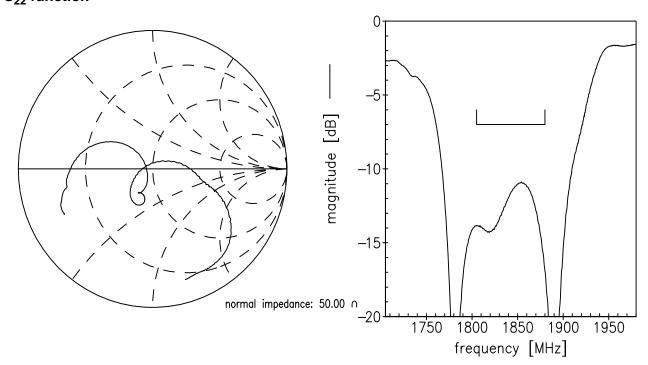



SAW Components	B5330
SAW RF filter	1842.5 MHz

**Data sheet** 



#### References

Туре	B5330
Ordering code	B39182B5330U410
Marking and package	C61157-A7-A67
Packaging	F61074-V8228-Z000
Date codes	L_1126
S-parameters	B5330_NB.s2p B5330_WB.s2p see file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Matching coils	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a> for a large variety of matching coils.

For further information please contact your local EPCOS sales office or visit our webpage at <a href="https://www.epcos.com">www.epcos.com</a> .

Published by EPCOS AG Systems, Acoustics, Waves Business Group P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2015. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



SAW Components B5330

SAW RF filter 1842.5 MHz

Data sheet



The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- 6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, Alu-X, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PQSine, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.