


400 mW & 500 mW, TC

DO-7 Case

Type	Zener Voltage		Test Current	Maximum† Dynamic Impedance	Voltage Temperature Stability	Temperature Range	Typical Temperature Coefficient
	Min.	Max.					
	V_Z	V_Z	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$\Delta V_{ZT} \text{ Max.}$		
	V	V	mA	Ω	mV	°C	%/°C
1N940 1N940A 1N940B	8.55	9.45	7.5	20	1.3 2.7 3.7	0 to + 75 -55 to +100 -55 to +150	0.0002

†Zener impedance is derived from the 1kHz voltage created when AC current with RMS value of 10% of DC zener test current is superimposed on the test current.

DO-7 Case

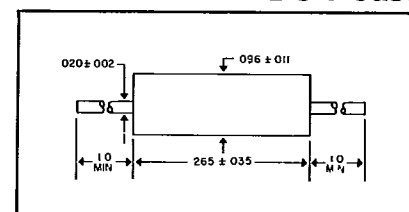


400 mW & 500 mW, TC

DO-7 Case

Type	Zener Voltage		Test Current	Maximum† Dynamic Impedance	Voltage Temperature Stability	Temperature Range	Typical Temperature Coefficient
	Min.	Max.					
	V_Z	V_Z	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$\Delta V_{ZT} \text{ Max.}$		
	V	V	mA	Ω	mV	°C	%/°C
1N941 1N941A 1N941B	11.12	12.28	7.5	30	88 181 239	0 to + 75 -55 to +100 -55 to +150	.01
1N942 1N942A 1N942B	11.12	12.28	7.5	30	44 90 120	0 to + 75 -55 to +100 -55 to +150	.005
1N943 1N943A 1N943B	11.12	12.28	7.5	30	18 36 47	0 to + 75 -55 to +100 -55 to +150	.002
1N944 1N944A 1N944B	11.12	12.28	7.5	30	9 18 24	0 to + 75 -55 to +100 -55 to +150	.001
1N945 1N945A 1N945B	11.12	12.28	7.5	30	4 9 12	0 to + 75 -55 to +100 -55 to +150	.0005
1N946 1N946A 1N946B	11.12	12.28	7.5	30	20	0 to + 75 -55 to +100 -55 to +150	.0005

†Zener impedance is derived from the 1kHz voltage created when AC current with RMS value of 10% of DC zener test current is superimposed on the test current.

DO-7 Case

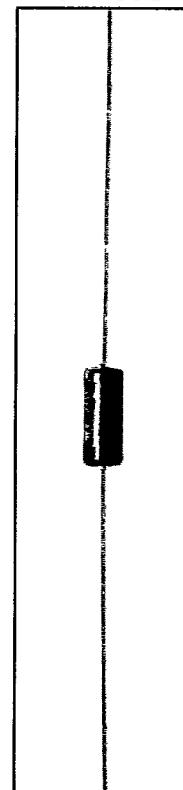

400 mW & 500 mW, TC

DO-7 Case

Type	Zener Voltage		Test Current	Maximum† Dynamic Impedance	Voltage Temperature Stability	Temperature Range	Typical Temperature Coefficient
	Min.	Max.					
	V_Z	V_Z	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$\Delta V_{ZT} \text{ Max.}$		
	V	V	mA	Ω	mV	°C	%/°C
1N3154 1N3154A 1N3155 1N3155A	8.0	8.8	10	15	130 172 65 86	-55 to +100 -55 to +150 -55 to +100 -55 to +150	.01 .01 .005 .005
1N3156 1N3156A 1N3157 1N3157A	8.0	8.8	10	15	26 34 13 17	-55 to +100 -55 to +150 -55 to +100 -55 to +150	.002 .002 .001 .001

†Zener impedance is derived from the 1kHz voltage created when AC current with RMS value of 10% of DC zener test current is superimposed on the test current.

AMERICAN POWER DEVICES SELECTION GUIDE

APD devices cross-reference to Motorola part numbers. For applications where output voltages must remain within narrow limits during changes in input voltage, load resistance and temperature.

TEMPERATURE COMPENSATED VOLTAGE REFERENCE DIODES

Nominal Zener Voltage V	Test Current mA dc	Test Temperature Points	Average Temperature Coefficient Over The Operating Range										Case		
			0.01%/°C		0.005%/°C		0.002%/°C		0.001%/°C		0.0005%/°C				
			Type	ΔVz Max V	Type	ΔVz Max V	Type	ΔVz Max V	Type	ΔVz Max V	Type	ΔVz Max V			
6.2* 6.2**	7.5 7.5	A A	1N821 1N821A	0.096 0.096	1N823 1N823A	0.048 0.048	1N825 1N825A	0.019 0.019	1N827 1N827A	0.009 0.009	1N829 1N829A	0.005 0.005	DO-7		
6.4	0.5	B	1N4565	0.046	1N4566	0.024	1N4567	0.010	1N4568	0.005	1N4569	0.002			
	0.5	A	1N4565A	0.099	1N4566A	0.050	1N4567A	0.020	1N4568A	0.010	1N4569A	0.005			
	1.0	B	1N4570	0.048	1N4571	0.024	1N4572	0.010	1N4573	0.005	1N4574	0.002			
	1.0	A	1N4570A	0.099	1N4571A	0.050	1N4572A	0.020	1N4573A	0.010	1N4574A	0.005			
	2.0	B	1N4575	0.048	1N4576	0.024	1N4577	0.010	1N4578	0.005	1N4579	0.002			
	2.0	A	1N4575A	0.099	1N4576A	0.050	1N4577A	0.020	1N4578A	0.010	1N4579A	0.005			
	4.0	B	1N4580	0.048	1N4581	0.024	1N4582	0.010	1N4583	0.005	1N4584	0.002			
	4.0	A	1N4580A	0.099	1N4581A	0.050	1N4582A	0.020	1N4583A	0.010	1N4584A	0.005			
8.4	10 10	A C	1N3154 1N3154A	0.130 0.172	1N3155 1N3155A	0.065 0.085	1N3156 1N3156A	0.026 0.034	1N3157 1N3157A	0.013 0.017				DO-7	
	8.5	0.5 0.5 1.0 1.0	B A B A	1N4775 1N4775A 1N4780 1N4780A	0.064 0.132 0.064 0.132	1N4776 1N4776A 1N4781 1N4781A	0.032 0.066 0.032 0.066	1N4777 1N4777A 1N4782 1N4782A	0.013 0.026 0.013 0.026	1N4778 1N4778A 1N4783 1N4783A	0.006 0.013 0.006 0.013	1N4779 1N4779A 1N4784 1N4784A	0.003 0.007 0.003 0.007		
9.0		7.5 7.5 7.5	B A C	1N935 1N935A 1N935B	0.067 0.139 0.184	1N936 1N936A 1N936B	0.033 0.069 0.092	1N937 1N937A 1N937B	0.013 0.027 0.037	1N938 1N938A 1N938B	0.006 0.013 0.018	1N939 1N939A 1N939B	0.003 0.007 0.009		
		9.1	0.5 0.5 1.0 1.0	B A B A	1N4765 1N4765A 1N4770 1N4770A	0.068 0.141 0.068 0.141	1N4766 1N4766A 1N4771 1N4771A	0.034 0.070 0.034 0.070	1N4767 1N4767A 1N4772 1N4772A	0.014 0.028 0.014 0.028	1N4768 1N4768A 1N4773 1N4773A	0.007 0.014 0.007 0.014	1N4769 1N4769A 1N4774 1N4774A		0.003 0.007 0.003 0.007
			11.7	7.5 7.5 7.5	B A C	1N941 1N941A 1N941B	0.088 0.181 0.239	1N942 1N942A 1N942B	0.044 0.090 0.120	1N943 1N943A 1N943B	0.018 0.036 0.047	1N944 1N944A 1N944B	0.009 0.018 0.024		1N945 1N945A 1N945B

* $Z_{T1} = 15$ ** $Z_{T1} = 10$

Test Temperature Points

A	-55, 0, +25, +75, +100
B	0, +25, +75
C	-55, 0, 25, +75, +100, +150
D	0, +25, +70
E	-55, 0, +25, +75, +125
F	-55, 0, +75, +125, +185
G	+25, +75, +100

APD CAN SELECT THE ABOVE PARTS TO 1% AND 2% TOLERANCES
BURN-IN AND SPECIAL TESTING CAN ALSO BE PROVIDED AS REQUIRED



american
power devices, inc.

1N941-1N945
1N941A-1N945A
1N941B-1N945B

500 mW temperature compensated zener reference diodes

FEATURES

- 11.7 V stable references
- Guaranteed maximum $\%/^{\circ}\text{C}$
- Hermetically sealed glass package

MAXIMUM RATINGS

- Junction Temperature: -65°C to $+200^{\circ}\text{C}$
- Storage Temperature: -65°C to $+200^{\circ}\text{C}$
- DC Power Dissipation: 500mW @ $T_j < 50^{\circ}\text{C}$
- Derate above 50°C : 3.33mW/ $^{\circ}\text{C}$

These silicon devices are low-level, temperature compensated, zener reference diodes. Oxide-passivated junctions give them stability and make these diodes highly reliable reference sources. Glass-enclosed construction provides a rugged, hermetically sealed unit.

ELECTRICAL CHARACTERISTICS @ $T_A = 25^{\circ}\text{C}$

JEDEC TYPE NUMBERS	ZENER VOLTAGE $V_Z @ I_{ZT}$	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE (Note 1) Z_{ZT}	VOLTAGE TEMPERATURE STABILITY (Note 2) (dV_Z/dT) MAXIMUM	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT
	VOLTS	mA	OHMS	mV	$^{\circ}\text{C}$	$\%/^{\circ}\text{C}$
1N941	11.12 - 12.28	7.5	30	88	0 to +75	01
1N941A	11.12 - 12.28	7.5	30	181	-55 to +100	01
1N941B	11.12 - 12.28	7.5	30	239	-55 to +150	01
1N942	11.12 - 12.28	7.5	30	44	0 to +75	005
1N942A	11.12 - 12.28	7.5	30	90	-55 to +100	005
1N942B	11.12 - 12.28	7.5	30	120	-55 to +150	005
1N943	11.12 - 12.28	7.5	30	18	0 to +75	002
1N943A	11.12 - 12.28	7.5	30	36	-55 to +100	002
1N943B	11.12 - 12.28	7.5	30	47	-55 to +150	002
1N944	11.12 - 12.28	7.5	30	9	0 to +75	001
1N944A	11.12 - 12.28	7.5	30	18	-55 to +100	001
1N944B	11.12 - 12.28	7.5	30	24	-55 to +150	001
1N945	11.12 - 12.28	7.5	30	4	0 to +75	0005
1N945A	11.12 - 12.28	7.5	30	9	-55 to +100	0005
1N945B	11.12 - 12.28	7.5	30	12	-55 to +150	0005

Note 1 The zener impedance is derived from the 60 Hz ac voltage, which results when an ac current having an rms value equal to 10% of the DC zener current (I_{ZT}) is superimposed on I_{ZT} . Zener impedance is measured at two points to insure a sharp knee at breakdown thus eliminating unstable devices.

Note 2 The maximum allowable change over the entire temperature range, i.e. the diode voltage will not exceed the specified mV at any discrete temperature between the established limits.

MECHANICAL CHARACTERISTICS

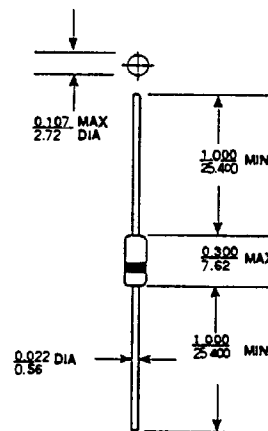


FIGURE 1 all dimensions in INCH mm

CASE: Hermetically sealed glass package (DO-7)
FINISH: Corrosion resistant.
Leads are tin plated.
THERMAL RESISTANCE:
250 $^{\circ}\text{C}/\text{W}$ (typ) junction to ambient.
POLARITY: Cathode banded.
WEIGHT: 0.2 grams (typ).

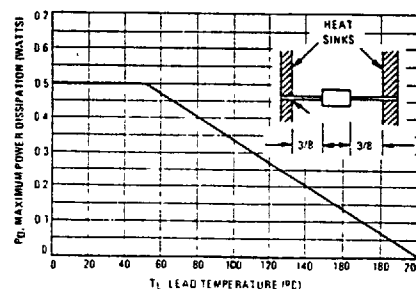


Figure 2 POWER DERATING



american
power devices, inc.

1N941-1N945
1N941A-1N945A
1N941B-1N945B

TYPICAL CHARACTERISTICS

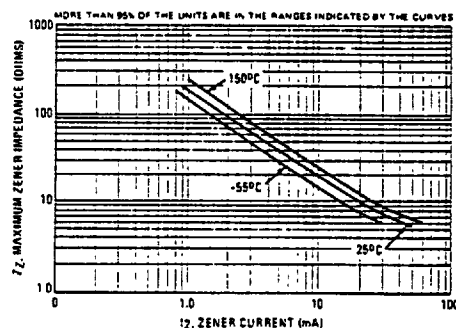


Figure 3 CHANGE OF ZENER IMPEDANCE VERSUS CHANGE IN OPERATING CURRENT

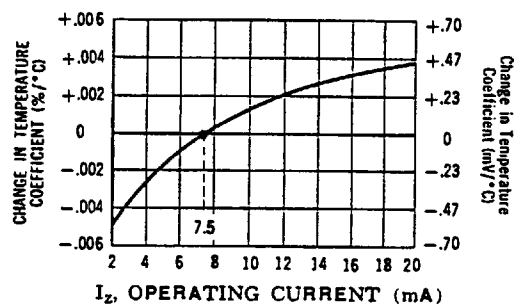


Figure 4 CHANGE OF TEMPERATURE COEFFICIENT VERSUS CHANGE IN OPERATING CURRENT

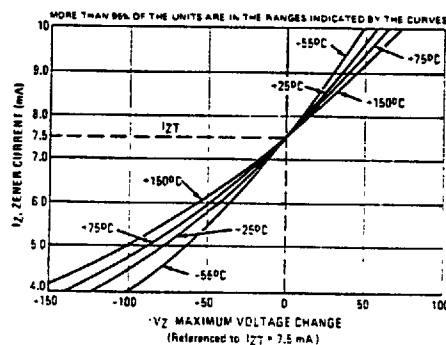



Figure 5 ZENER CURRENT VERSUS MAXIMUM VOLTAGE CHANGE

TC ZENER DIODES

400mW & 500mW (cont.)

Part #	Zener Voltage		Test Current	Maximum Dynamic Impedance	Voltage Temperature Stability	Temperature Range	Typical Temperature Coefficient
	Min.	Max.					
	V_Z (V)		I_{ZT} (mA)	$Z_{ZT} @ I_{ZT}$ (Ω)	ΔV_{ZT} (mV)	$^{\circ}\text{C}$	T_c (%/ $^{\circ}\text{C}$)
1N3154	8.0	8.8	10	15	130	-55/+100	.01
1N3154A	8.0	8.8	10	15	172	-55/+150	.01
1N3155	8.0	8.8	10	15	65	-55/+100	.005
1N3155A	8.0	8.8	10	15	86	-55/+150	.005
1N3156	8.0	8.8	10	15	26	-55/+100	.002
1N3156A	8.0	8.8	10	15	34	-55/+150	.002
1N3157	8.0	8.8	10	15	13	-55/+100	.001
1N3157A	8.0	8.8	10	15	17	-55/+150	.001
1N935	8.55	9.45	7.5	20	67	0/+75	0.01
1N935A	8.55	9.45	7.5	20	139	-55/+100	0.01
1N935B	8.55	9.45	7.5	20	184	-55/+150	0.01
1N936	8.55	9.45	7.5	20	33	0/+75	0.005
1N936A	8.55	9.45	7.5	20	69	-55/+100	0.005
1N936B	8.55	9.45	7.5	20	92	-55/+150	0.005
1N937	8.55	9.45	7.5	20	13	0/+75	0.002
1N937A	8.55	9.45	7.5	20	27	-55/+100	0.002
1N937B	8.55	9.45	7.5	20	37	-55/+150	0.002
1N938	8.55	9.45	7.5	20	6	0/+75	0.001
1N938A	8.55	9.45	7.5	20	13	-55/+100	0.001
1N938B	8.55	9.45	7.5	20	18	-55/+150	0.001
1N939	8.55	9.45	7.5	20	3	0/+75	0.0005
1N939A	8.55	9.45	7.5	20	7	-55/+100	0.0005
1N939B	8.55	9.45	7.5	20	9	-55/+150	0.0005
1N940	8.55	9.45	7.5	20	1.3	-0/+75	0.0002
1N940A	8.55	9.45	7.5	20	2.7	-55/+100	0.0002
1N940B	8.55	9.45	7.5	20	3.7	-55/+150	0.0002
1N941	11.12	12.28	7.5	30	88	0/+75	.01
1N941A	11.12	12.28	7.5	30	181	-55/+100	.01
1N941B	11.12	12.28	7.5	30	239	-55/+150	.01
1N942	11.12	12.28	7.5	30	44	0/+75	.005
1N942A	11.12	12.28	7.5	30	90	-55/+100	.005
1N942B	11.12	12.28	7.5	30	120	-55/+150	.005
1N943	11.12	12.28	7.5	30	18	0/+75	.002
1N943A	11.12	12.28	7.5	30	36	-55/+100	.002
1N943B	11.12	12.28	7.5	30	47	-55/+150	.002
1N944	11.12	12.28	7.5	30	9	0/+75	.001
1N944A	11.12	12.28	7.5	30	18	-55/+100	.001
1N944B	11.12	12.28	7.5	30	24	-55/+150	.001
1N945	11.12	12.28	7.5	30	4	0/+75	.0005
1N945A	11.12	12.28	7.5	30	9	-55/+100	.0005
1N945B	11.12	12.28	7.5	30	12	-55/+150	.0005
1N946	11.12	12.28	7.5	30	20	0/+75	.0005
1N946A	11.12	12.28	7.5	30	20	-55/+100	.0005
1N946B	11.12	12.28	7.5	30	20	-55/+150	.0005
1N3496	5.9	6.5	7.5	15	23	0 to +75	.005
1N3497	5.9	6.5	7.5	15	9	0 to +75	.002
1N3498	5.9	6.5	7.5	15	5	0 to +75	.001
1N3499	5.9	6.5	7.5	15	2	0 to +75	.0005
1N3500	5.9	6.5	7.5	15	47	0 to +75	.01

D0-35

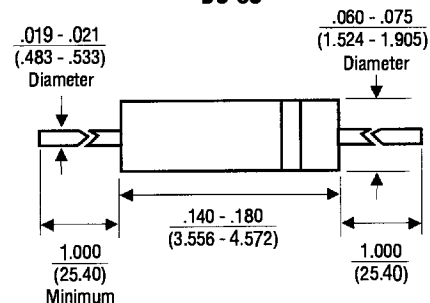

Operating temperature -65°C to +150°C
5% standard tolerance; Special tolerances available upon request