

16.90 [.665]

16.20 [.638]

LED 2
LEFTLED 1
RIGHTPIN NUMBERS
SHOW FOR REFERENCE
ONLY, IT DOES NOT
SHOW ON ACTUAL PART

19.84 [.781]

11.95 [.470]
0.97 [.038]

20.70 [.815]

8.55 [.337]

DIM A±0.20[DIM A±.008]

TAIL LENGTH FOR
LED AND SIGNAL PIN8.98 [.354]
13.75 [.541]

DIPPED ZONE

6.50 [.256] MIN.

R0.20 [R.008] MAX


5.00 [.197]

TOP VIEW

R0.25 [R.010] MAX

16.20 [.638]

11.50 [.453] MIN

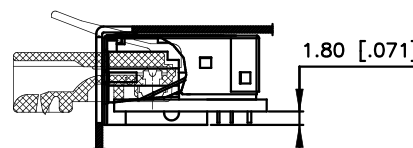FRONT VIEW
RECOMMEND PANEL LAYOUT

1.80 [.071]

SECTION A-A
SIDE VIEW SHOWING
WITH PLUG

8.35 [.329]

8.55 [.337]

8.97 [.353]

PANEL

0.80 [.031]

SECTION B-B
SIDE VIEW SHOWING
WITH PANEL AND PCB

$\varnothing 0.90 \pm 0.05$ [$\varnothing 0.035 \pm .002$]
 4 HOLES
 $\varnothing 0.90 \pm 0.05$ [$\varnothing 0.035 \pm .002$]
 8 HOLES

16.90 [.665]

13.04 [.513]

2.29 [.090]

6.27 [.247]
8.05 [.317]
10.42 [.410]

2.61 [.103]

7.68 [.302]

R0.50 [R.020]

1.00 [.039]

1.02 [.040]*7=7.14 [.281]

16.20 [.638]

19.84 [.781]

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05 [.002]mm.


LEFT LED RIGHT LED

SINGLE COLOUR LED

YELLOW
 GREEN
 BI-COLOUR LED

12(+) 11(-)
 10(+) 9(-)

LED SCHEMATIC



NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC.
- CURRENT RATING : 1.25 AMP.
- INSULATING RESISTANCE : 500 MEGOHMS MINIMUM.
- DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.
- CATEGORY 6 CHARACTERISTIC:

Frequency MHz	Near-End Crosstalk dB, MIN.	Return Loss dB, MIN.	Insertion loss dB, MAX.
1.0	75.0	30.0	0.1
4.0	75.0	30.0	0.1
8.0	75.0	30.0	0.1
10.0	74.0	30.0	0.1
16.0	69.9	30.0	0.1
20.0	68.0	30.0	0.1
25.0	66.0	30.0	0.1
31.25	64.1	30.0	0.11
62.5	58.1	28.1	0.16
100.0	54.0	24.0	0.20
200.0	48.0	18.0	0.28
250.0	46.0	16.0	0.32

MECHANICAL:

- SHIELD : STAINLESS STEEL, WITH TIN-DIP ON SOLDER TABS.
- HOUSING : HIGH TEMP THERMOPLASTIC. UL 94V-0.
- INSERT : HIGH TEMP THERMOPLASTIC UL 94V-0.
- PCB : FR-4.
- CONTACT : PHOSPHOR BRONZE.

SELECTIVE GOLD PLATING FOR MATING SURFACE,
SEE AMPHENOL PART NUMBER FOR DETAIL.
50u" NICKEL UNDERPLATE

ENVIRONMENTAL:

- STORAGE : -40° TO +85°.
 - OPERATION : -40° TO +85°.
- MATES WITH MODULAR PLUG CONFORMING TO TIA 1096.
RECOMMENDED SOLDER PROCESS: WAVE SOLDER, PEAK TEMPERATURE
260° FOR 5 SECOND MAXIMUM.

AMPHENOL PART NUMBER: RJE71-188-1XXX

GOLD PLATING OPTION

- 1=6u" [0.15 MICRONS] GOLD PLATING
 2=15u" [0.38 MICRONS] GOLD PLATING
 3=30u" [0.76 MICRONS] GOLD PLATING
 4=50u" [1.27 MICRONS] GOLD PLATING

OPTIONS (SEE BELOW TABLE 1)
REFER TO LED OPTIONS DRAWING
FOR ORDERING CODES

TABLE 1

RJE711881XX1	3.18[.125]	2.36[.093]
RJE711881XX2	2.27[.089]	1.57[.062]
RJE711881XX3	2.16[.085]	1.57[.062]
AMPHENOL P/N:	DIM A	RECOMMEND PCB THICKNESS

Amphenol Canada Corp.
www.amphenolcanada.comMODULAR JACK, SINGLE PORT, 8 POSITIONS, 8 CONTACTS,
SHIELDED WITH TOP & SIDE TABS, WITH LED,
SINK PCB TYPE, TAB UP, CAT6


DWG NO.

P-RJE71-188-1XXX

REV
F

UNLESS SPECIFIED OTHERWISE	DRAWN HUGH WANG JULY 17, 2012
PRIMARY UNITS MILLIMETERS	CHECKED L.CHAN JULY 17, 2012
SECONDARY INCHES	M.E. APP'D
REFERENCE IN PARENTHESES	Q.A. APP'D
GENERAL TOLERANCES FOR MM	DWG APP'D ADRIAN.G JULY 17, 2012
1 DECIMAL PLACE ± 0.50	ENG. REL. NO.
2 DECIMAL PLACE ± 0.30	REF.
3 DECIMAL PLACE ± 0.10	THIRD ANGLE PROJECTION
ANGULAR DEGREES $\pm 3^\circ$	DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

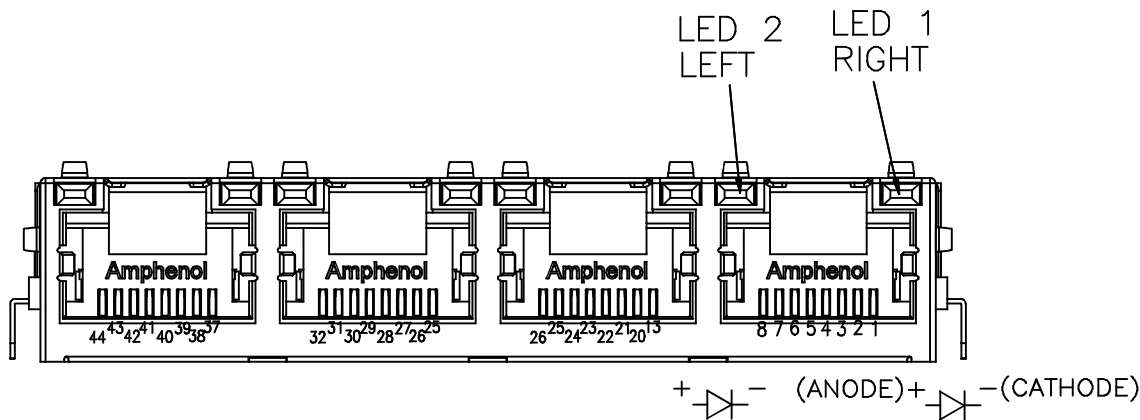

TYPICAL FOR SINGLE & MULTI-PORT

EXAMPLE:

PART NUMBER RJE71-X88-1XXX

LED COLOR CODE



LED SPECIFICATIONS:

FORWARD VOLTAGE: 2.1 VOLTS TYP.

REVERSE VOLTAGE: 5.0 VOLTS MIN.

LUMINOUS INTENSITY: 0.5 mCd MIN.

(AT If=2mA)

STORAGE TEMPERATURE: -40° TO 85° C

LEAD SOLDERING TEMPERATURE: 260° C

(5 SEC, 1/16" FROM CASE)

PLATING ON TAILS: TIN OR TIN/COPPER
ALLOY OVER SILVER

PRIMARY COLOR FOR BI-COLOR

LEDs IN STANDARD ANODE/
CATHODE CONFIGURATION IS:

RED-GREEN= RED

RED-YELLOW= RED

GREEN-YELLOW= GREEN

GREEN-ORANGE= GREEN

CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)
			9	GREEN	BLOCKED	J	BiC RD/GR	YELLOW
1	YELLOW	GREEN	A	BiC GR/YE	BiC GR/YE	K	YELLOW	BiC GR/OR
2	BLOCKED	GREEN	B	BiC RD/GR	BiC RD/GR	L	BiC GR/YE	RED
3	YELLOW	BLOCKED	C	BiC RD/GR	BiC GR/YE	M	RED	YELLOW
4	GREEN	YELLOW	D	GREEN	BiC GR/YE	P	GREEN	BiC RD/GR
5	GREEN	GREEN	E	YELLOW	BiC GR/YE	R	BiC GR/OR	GREEN
6	YELLOW	YELLOW	F	BiC GR/YE	YELLOW	T	RED	RED
7	RED	GREEN	G	BiC GR/OR	BiC GR/OR	V	BiC RD/GR	GREEN
8	GREEN	RED	H	BiC GR/YE	GREEN			

LEGEND

BiC=BI-COLOR LED

LOWC=LOW CURRENT LED

YE=YELLOW

GR=GREEN

RD=RED

OR=ORANGE


NOTE:

THE TWO DIGITS PRECEDING THE
ADDITIONAL LED CODE MUST BE
USED IN THE PART NUMBER, WHEN
ORDERING ANY OF THE ADDITIONAL
LED OPTIONS.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN mm
TOLERANCE ARE :
FRACTION DECIMALS ANGLES

.X ±0.50 .X° ±3.0°
.XX ±0.30 .X° ±2.0°
.XXX ±0.10 .XX° ±1.0°



3rd ANGLE PROJECTION

DRAWN	HUGH WANG	DATE	OCT 30, 2012
DESIGNED	HUGH WANG	DATE	OCT 30, 2012
CHECKED	L.CHAN	DATE	OCT 30, 2012
I. E. APPRD.			
Q. A. APPRD.			
DWG. APPRD.	ADRIAN.G	DATE	OCT 30, 2012
ENG. REL. NO.			
REF.			
DIMENSIONS ARE IN	mm	CODE ID. NO.	03554

Amphenol Canada Corp.

TITLE
LED OPTIONS FOR RJE71, SINGLE
OR MULTI-PORT CONNECTORS

DWG	C	DRAWING NO.	P-RJE71-LEDs	REV.	F
SCALE	4/1	WT.	-----	SURF.	-----
SHEET	1	OF	1		