

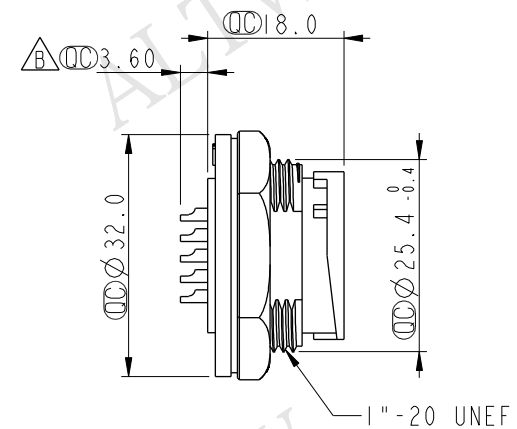



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C		2008/05/15	Gao Ling	Change dimension
D	LE3-8B0110	2008/11/07	Tommy	Change To Pin Hole
E	LEN1660015	2016/05/27	Vicky	Update Nut View & Logo


ALTW
CONFIDENTIAL
2016-05-27
R&D DEPT.




ALTW
DCC. DEPT.
CONFIDENTIAL
2016.06.01
ISSUED



Pin Assignments
Front View



Recommended
Panel Cut-Out

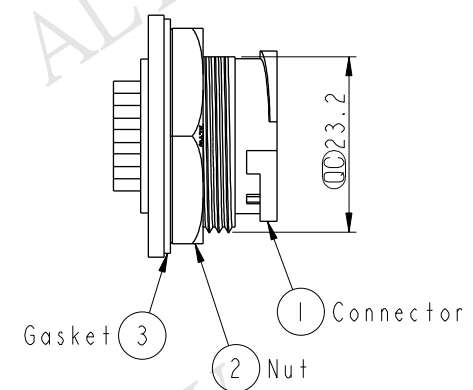

- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Gasket: EPDM, Black
 - * Nut: Nylon+GF, Black
 - * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
 - * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 4.0mm

UNIT:mm		TITLE Large Panel Lock 18Pin M Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO DD-18PMFS-LC7001	DRAWN BY Vicky	DATE 2016-05-27
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO DD-18PMFS-LC7001	CHECKED BY Rita	DATE 2016-05-27
REV. E		WC-REV. A.2	$\varnothing$ Inspection item			CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016-05-27