
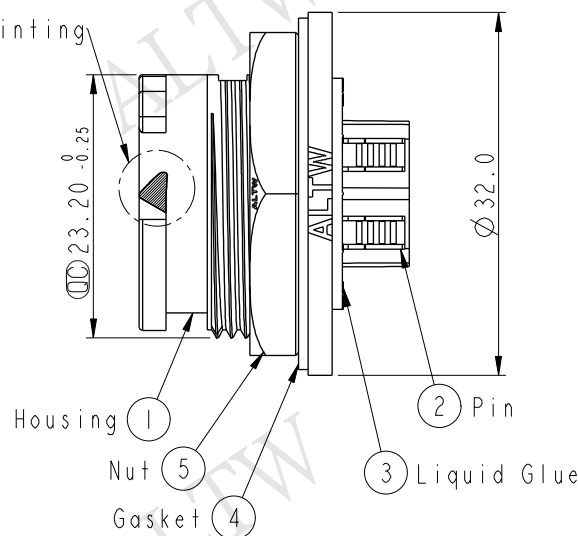
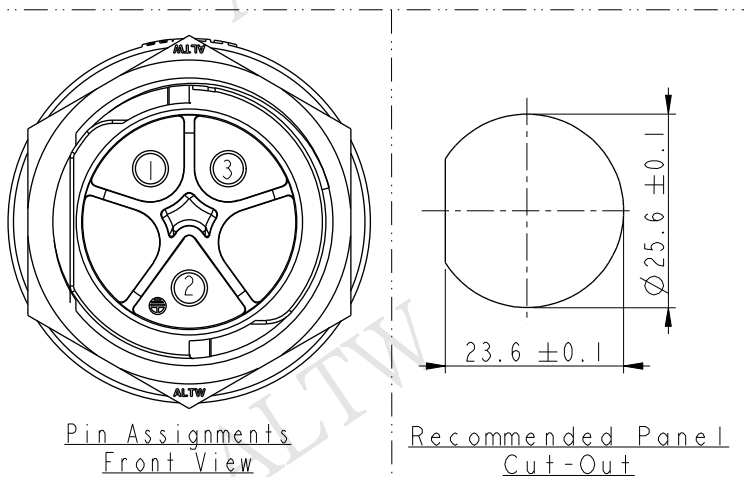


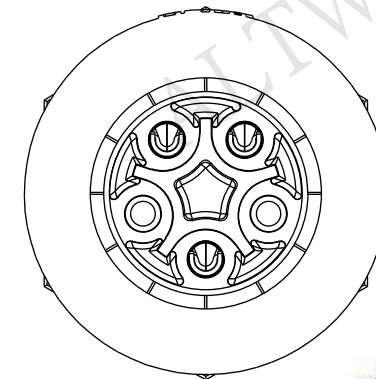


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-05-18	Wes	Change Rev.01 To Rev.A

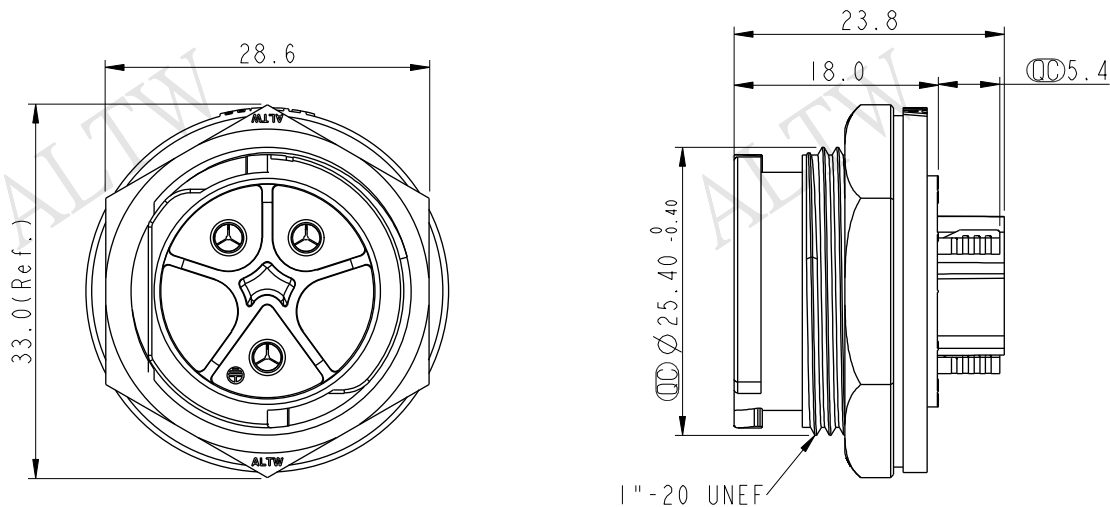

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP68(Unmated)
In 1 meters water within 24hours.
 - * Working Voltage Rating: AC 300V
 - * Working Current: 20A
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Liquid Glue: Black
 - * Nut: Nylon+GF, Black
 - * Gasket: Silicone, Gray
 - * Use Without Waterproof Cap
Panel Thickness Max: 3.6mm
 - * Use With Waterproof Cap
Panel Thickness Max: 2.6mm

A	UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
			X-Lok D Size 20A(For Power)		DC-03PMMS-QC800P		Wes Fan		2016-05-18	
			Receptacle Front 3P M Conn M Pin		DC-03PMMS-QC800P		Spring Liu		2016-05-18	
					CUSTOMER		APPROVED BY		DATE	
					ALTW		Kevin Hu		2016-05-18	

TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

SCALE	3:2	SIZE	A4	SHEET	1	OF	1
REV.	A	WC-REV.	A.1	QC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司