

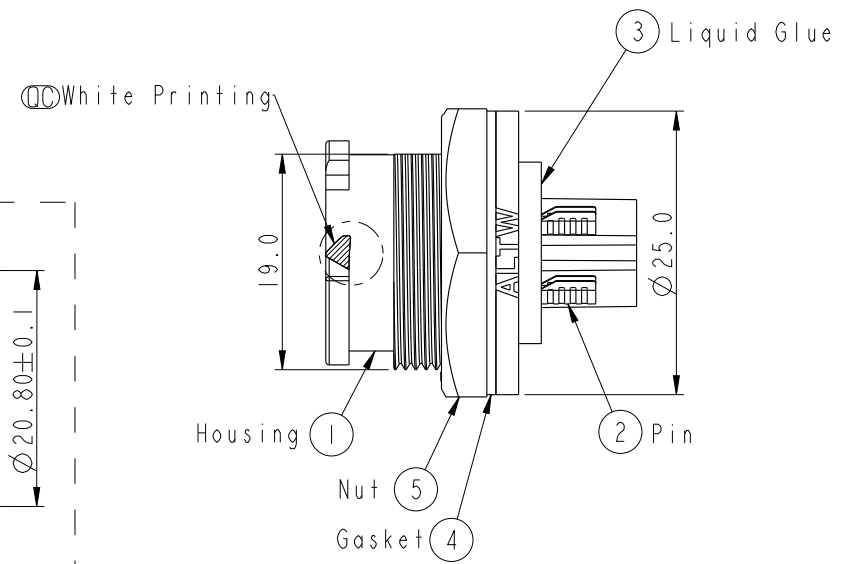
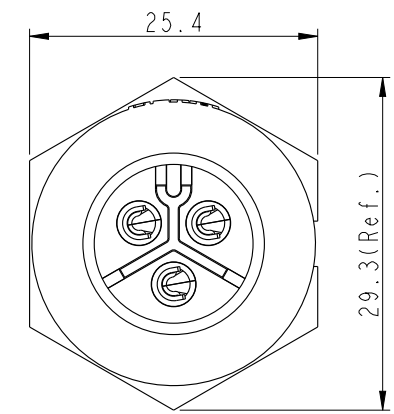
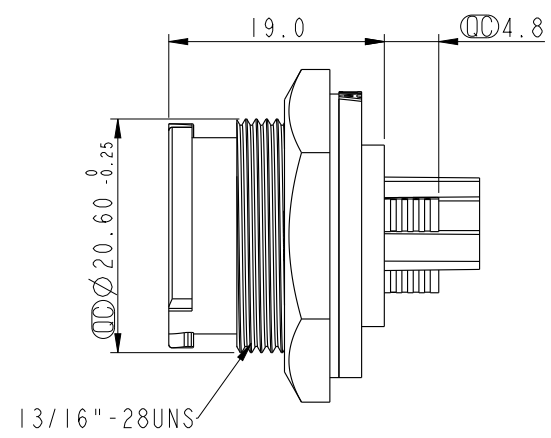




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-06-06	Tom_Gu	Change Rev.01 To Rev.A



- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP68(1M/24hours)
 - * Working Voltage Rating: AC 300V
 - * Working Current: 20A
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Nylon+GF, Black
 - * Gasket: Silicone, Gray
 - * Use Without Waterproof Cap
Panel Thickness Max: 4.2mm
 - * Use With Waterproof Cap
Panel Thickness Max: 3.0mm



Pin Assignments
Front View

Recommenderd Panel Cut-Out

UNIT:mm				TITLE X-Lok C Size Receptacle Front 3Pin 20A M Conn. F Pin		ITEM NO CC-03PMFS-QC800P		DRAWN BY Tom_Gu		DATE 2016-06-06	
TOLERANCE		.X ±0.25		SCALE 3:2		DWG NO CC-03PMFS-QC800P		CHECKED BY Spring_Liu		DATE 2016-06-06	
.XX ±0.1		SIZE A4		SHEET 1 OF 1		CUSTOMER ALTW		APPROVED BY Kevin_Hu		DATE 2016-06-06	
.XXX ±0.05		WC-REV. A.1		REV. A							
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司

$\varnothing$ Inspection item