

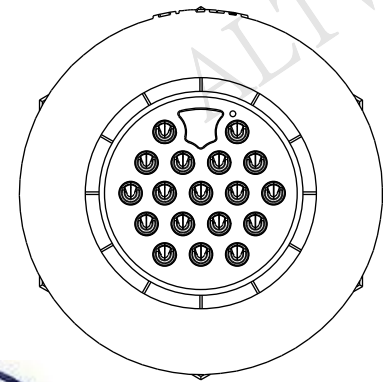
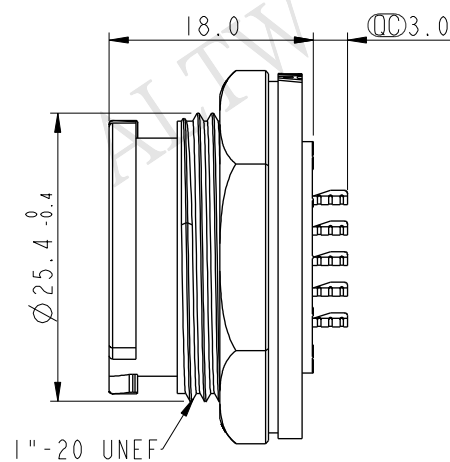
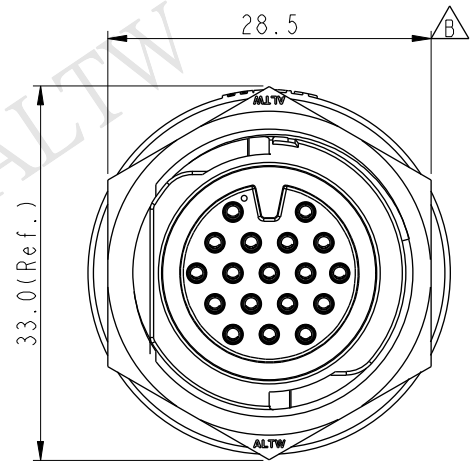
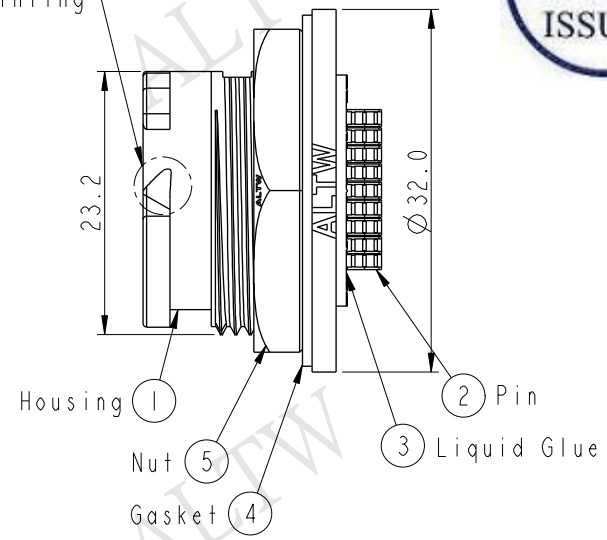
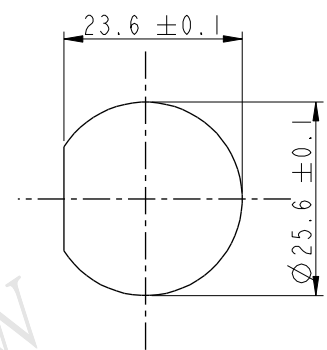
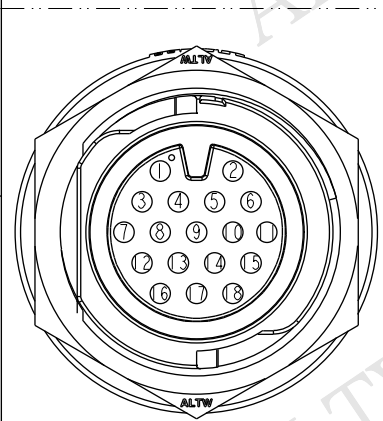


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660018	2016/05/27	Vicky	Update Nut Dime



White Printing



- Note:
- * Important Dimension To Check
 - * Waterproof Rate: IP68
 - * Working Voltage Rating: AC 300V
 - * Working Current: 5A
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Liquid Glue: Black
 - * Nut: Nylon+GF, Black
 - * Gasket: Silicone, Gray
 - * Use Without Waterproof Cap
Panel Thickness Max: 3.6mm
 - * Use With Waterproof Cap
Panel Thickness Max: 2.6mm

UNIT:mm		TITLE		X-Lok D Size		ITEM NO		DRAWN BY		DATE	
TOLERANCE		Receptacle Front 18P M Conn F Pin		DD-18PMFS-QC8001		Vicky		2016-05-27			
.X ±0.25		SCALE 3:2		DD-18PMFS-QC8001		Rita		2016-05-27			
.XX ±0.1		SIZE A4		CUSTOMER		ALTW		Lisa		2016-05-27	
.XXX ±0.05		SHEET 1 OF 1									
ANGLES ±1°		REV. B		WC-REV. A.2							
		QC: Inspection item									

Amphenol LTW
安費諾亮泰企業股份有限公司