

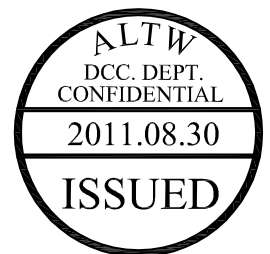
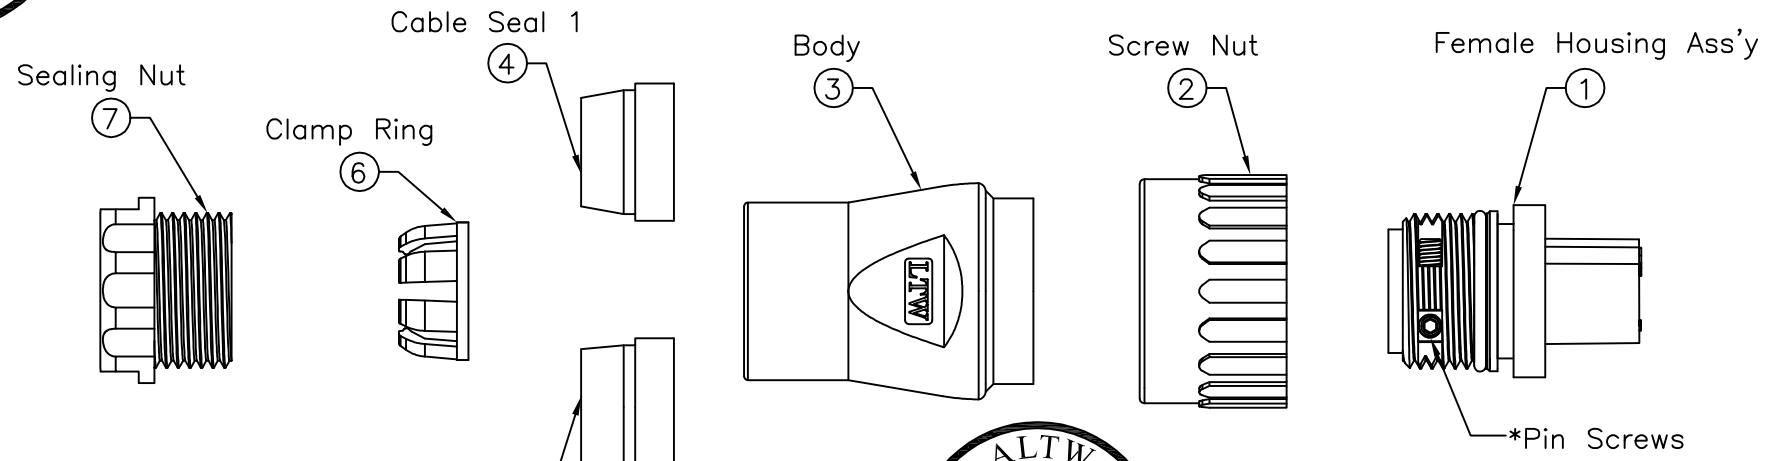




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

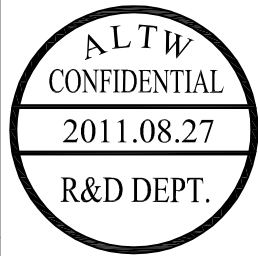

- Note:
- * @@Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Female Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Tin Plated
 - * Pin Screws: 1.5mm(HEX), Stainless Steel
For wire assembly, tightened by tool.
 - * O-ring: Silicone, Gray
 - * Seal 1:For Cable OD: $\phi 6.0\text{mm}\sim 9.0\text{mm}$
 - * Seal 2:For Cable OD: $\phi 9.0\text{mm}\sim 12.5\text{mm}$
 - * Flame Class: UL94V-0
 - ⑧ * One Set Unassembled in one PE Bag
 - * 1.5mm Hex Tool for Screws sold separately
 - △ * Wire Size Range: 14AWG~18AWG

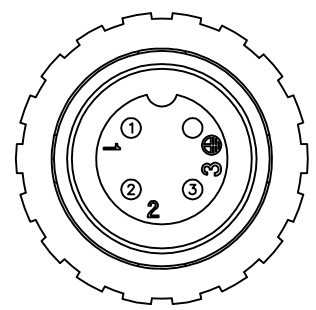

Pin Assignments
Front View

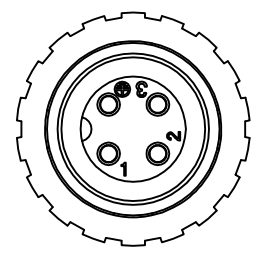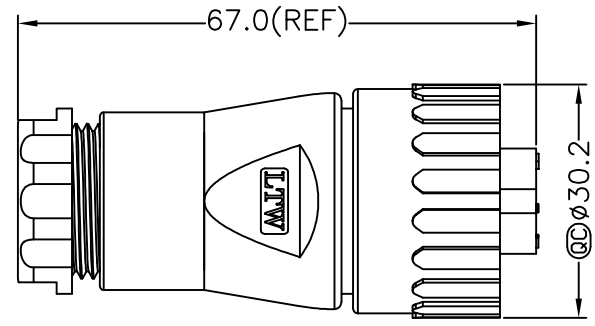

Conn.

A	UNIT:mm		TITLE Assy Female Power Conn. 16Amp Screw in Type Pin (Tin Plated)			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO PWG-04BFFB-SL7003		DRAWN BY baowei		DATE 2011/08/27				
	TOLERANCE ±0.5 mm		SCALE Free		SHEET 1 OF 1		DWG NO PWG-04BFFB-SL7003		CHECKED BY Micky		DATE 2011/08/27				
			REV. B	SIZE A4	QC :Inspection Item		CUSTOMER ALTW		APPROVED BY Victor		DATE 2011/08/27				
1		2		3		4		5		6		7		8 FMW0702-01-01A2	