


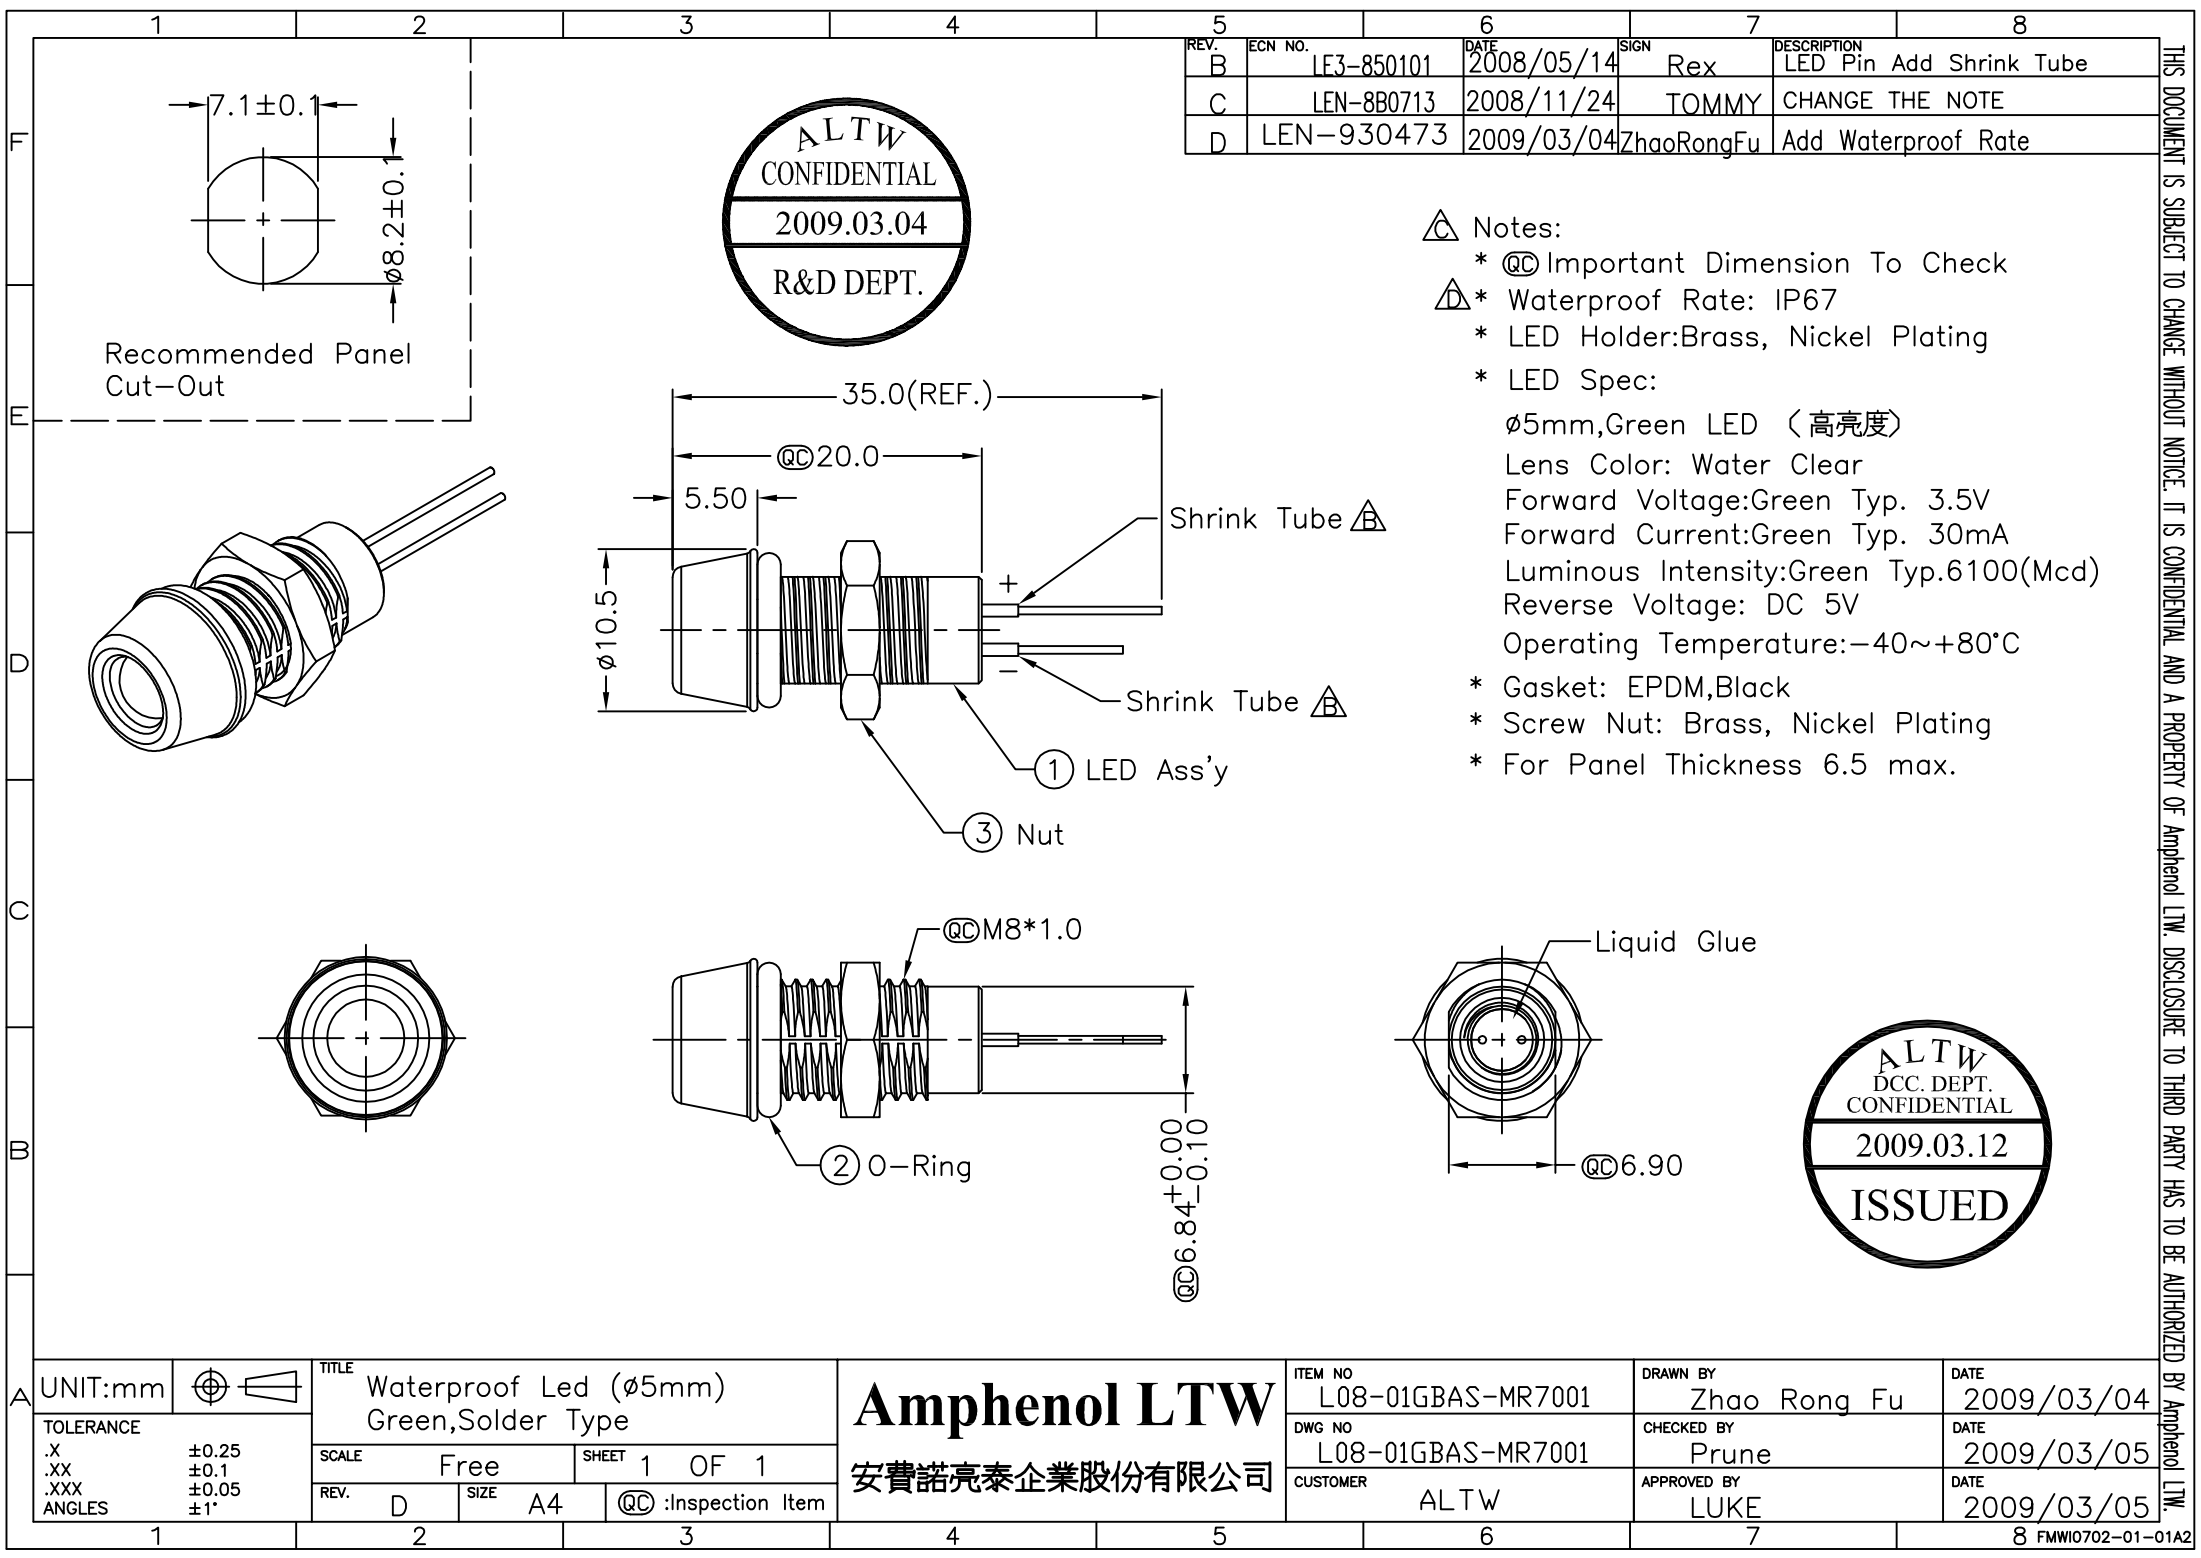

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-850101	2008/05/14	Rex	LED Pin Add Shrink Tube
C	LEN-8B0713	2008/11/24	TOMMY	CHANGE THE NOTE
D	LEN-930473	2009/03/04	ZhaoRongFu	Add Waterproof Rate

- △ Notes:
- * QC Important Dimension To Check
 - △ * Waterproof Rate: IP67
 - * LED Holder: Brass, Nickel Plating
 - * LED Spec:
 - ø5mm, Green LED (高亮度)
 - Lens Color: Water Clear
 - Forward Voltage: Green Typ. 3.5V
 - Forward Current: Green Typ. 30mA
 - Luminous Intensity: Green Typ. 6100(Mcd)
 - Reverse Voltage: DC 5V
 - Operating Temperature: -40~+80°C
 - * Gasket: EPDM, Black
 - * Screw Nut: Brass, Nickel Plating
 - * For Panel Thickness 6.5 max.

UNIT:mm		TITLE Waterproof Led (ø5mm) Green, Solder Type		SHEET 1 OF 1		ITEM NO L08-01GBAS-MR7001		DRAWN BY Zhao Rong Fu		DATE 2009/03/04	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE Free		REV. D		DWG NO L08-01GBAS-MR7001		CHECKED BY Prune		DATE 2009/03/05	
SIZE A4		QC : Inspection Item		CUSTOMER ALTW		APPROVED BY LUKE		DATE 2009/03/05		8 FMWIO702-01-01A2	

Amphenol LTW
安費諾亮泰企業股份有限公司