
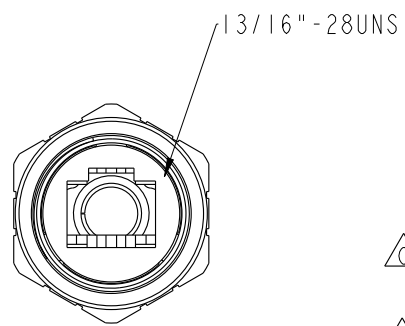
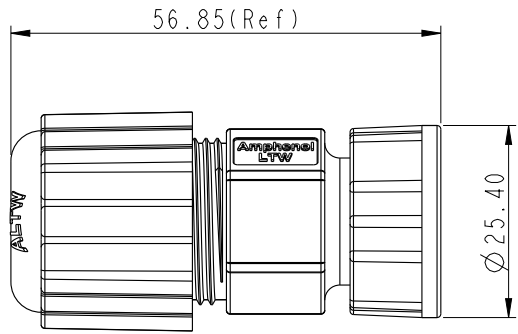
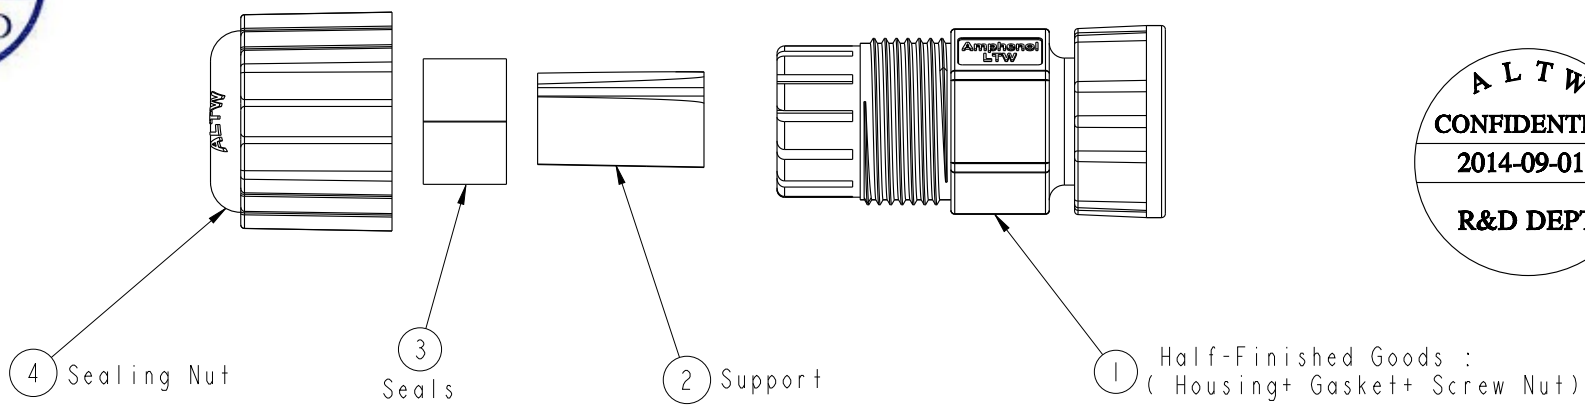


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1420098	2014-02-21	Yulong-wang	Change Screw Nut To Lock Nut; Remove the Pulg & Change the Note
C	LE31490140	2014-09-01	Joyy	Change to 94V0 material



- Note:
- * Important Dimension
 - * Waterproof Rate : IP67 (Mated)
 - * Housing : Nylon66, Black
 - * Gasket : Silicone, Gray
 - * Screw Nut : Nylon+GF, Black
 - * Support: PVC, Black
 - * Sealing Nut: Nylon+GF, Black
 - * Seals: Silicone, Gray.
 - * Cable OD Range: 5.0~6.5mm
 - * Mating Nut Torsion Value Range: 5~8kgf-cm
 - * Sealing Nut Torsion Value Range: 8~15kgf-cm
 - * One Set Unassembled in One PE Bag.

UNIT:mm			TITLE RJ45 FEED-THRU, 13/16"-28,CSIZE		
TOLERANCE	±0.25	±0.1	SCALE 1:1	SIZE A4	SHEET 1 OF 1
.X	±0.1	±0.05	REV. C	WC-REV. A.18	Inspection item
.XXX	±1°				
ANGLES					

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO RCP-00BMMS-SLM7001	DRAWN BY Joyy	DATE 2014-09-01
DWG NO RCP-00BMMS-SLM7001	CHECKED BY Tom	DATE 2014-09-01
CUSTOMER ALTW	APPROVED BY Victor	DATE 2014-09-01