


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468

10	FERRULE	COPPER	NOTE 2	1	FR-648/533X 127C
9	NUT	NOTE 1	NOTE 2	1	15687061606-5
8	BARREL	NOTE 1	NOTE 2	1	N1112A2-8-46 /31
7	CONTACT PIN	NOTE 1	NOTE 3	1	N1112A2-7
6	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
5	GASKET	SILICONE	RED	1	GS-156/8X15
4	CONTACT BODY	NOTE 1	NOTE 2	1	N5000-5
3	INSULATOR	NOTE 4	NATURAL	1	N1112A2-3
2	BODY	NOTE 1	NOTE 2	1	N1112B1-2
1	SHELL	NOTE 1	NOTE 2	1	N5000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS		
UNLESS OTHERWISE SPECIFIED TOLERANCES		
0.5-6	=	±0.2
6-30	=	±0.4
30-120	=	±0.6
120-315	=	±1
315-1000	=	±1.6
1000-2000	=	±2.4
SCALE	2.5/1	ISSUE A
PART NO.	N1112B1-001-NT3G-1-50	
APPROVED	DATE	10-11-01'
CHECKED	DATE	10-11-01'
DRAWN	DATE	10-11-01'
FILE NO.		

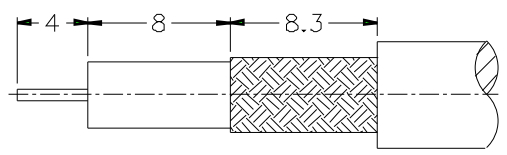

RECOMMENDED CABLE STRIPPING DIM'S

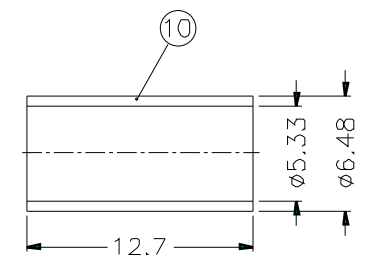

1. CRIMPED FERRULE
 HEX CRIMP SIZE .213"
 2. CONTACT PIN TO SOLDER

Amphenol

TITLE	N R/A CRIMP PLUG (FOR RG-58/U, 58C/U)	
DRAWING NO.	KJ-N1112B1-001-NT3G-58U-50	
ITEM NO.		