




REFERENCE DRAWING




- 1.Coplanarity : 0.08Max before IR, 0.10Max after IR.
- 2.Tongue position : 0.08Max before reflow, 0.12Max after reflow.
- 3.P/N :124018612112A
- 4.Packaging type: carrier tape.
- 5.Dimension marked ⊗ should be checked by QC and process.
Marked ∇ Should also check the CPK (CPK>=1.33) data.
- 6.No burrs are allowed on the contact area and solder tail area,
the maximum allowed stamping burrs is 0.05mm unless otherwise specified.
- 7.Material should be fulfilled Amphenol spec# SSN002
AND Customer Requirements,for halogen free products,also need to meet SSN004
- 8.Waterproof level:IP67

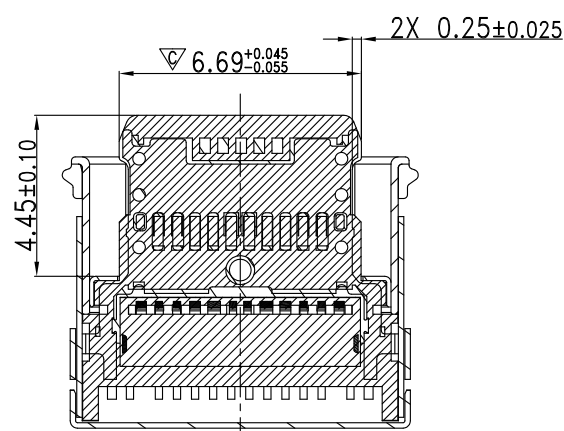

SECTION A-A
SCACE 1:1

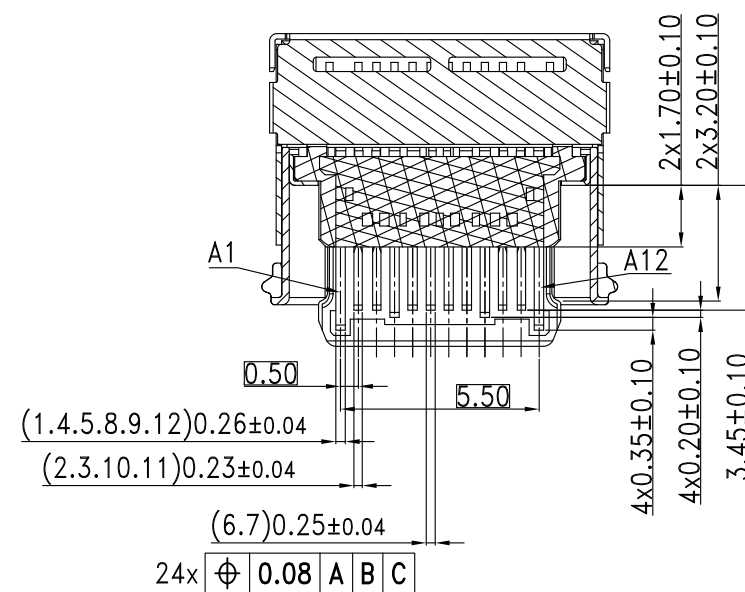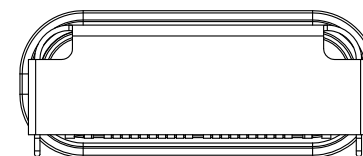

SECTION B-B
SCACE 1:1

G	GENERAL TOLERANCE		FILE.NO.	C12401861_X5	PART.NO.	124018612112A	DRAWN	Sam.Zheng	MATERIAL		SCALE	1:1					
	X.±0.50	x. °± 5°	REV.	X5	TITLE	USB TYPE C CONNECTOR	CHECKED	Michael.Qin	DATE	2018.04.10	UNIT	MM					
	.X±0.38	.x °± 2°	SIZE		SHEET	1 OF 2	APPROVED	Weison.Lu	Amphenol Shouhmin Industry								
	.XX±0.25	.xx ± 1°	A4														
1		2		3		4		5		6		7		8		9	

