





	2	3	4	5	6	7	8	
F			REV.	ECN NO.	DATE	SIGN	DESCRIPTION	
E								
D	4P 3P 2P	PVC	5.5 5.0 5.8	20	ABB-04BFFM-LL7AXX ABB-03BFFM-LL7AXX ABB-02BFFM-LL7AXX			
C	Contacts	Cable Jacket	Cable OD	AWG	Item No.			
B	4 White 白 3 Black 黑 2 Blue 藍 1 Brown 棕	3 Yellow 黃 2 White 白 1 Black 黑	2 Red 紅 1 Green 綠					
A	Pin # Wire Pin Out	Pin # Wire Pin Out	Pin # Wire Pin Out					
								
	Pin Assignments Front View							
	UNIT:mm		TITLE STANDARD CABLE LOCK F CONN F PIN		Amphenol LTW 安費諾亮泰企業股份有限公司			
	TOLERANCE ± 0.5		SCALE 1:1	SIZE A4	ITEM NO	DRAWN BY Jinhai	DATE 2015-07-14	
				SHEET 1 OF 1	DWG NO ABB-XXBFFM-LL7AXX	CHECKED BY Rensong	DATE 2015-07-14	
			REV. A	WC-REV. A.2	CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-07-14	
	1	2	3	4	5	6	7	8

(D) L (mm)

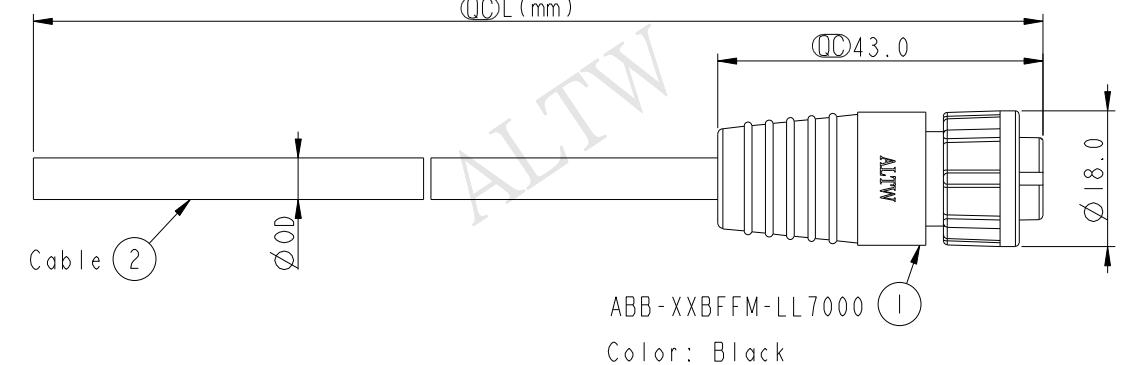


ABB-XXBFFM-LL7000 Conn.
Color: Black


ABB-XXBFFM-LL7AXX

02:2Pin
:
04:4Pin

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters

Cable Length(L): 01~99Meters

Note:
 * (D) Important Dimension To Check.
 * Waterproof Rate: IP67
 * Housing: Nylon+GF, Black.
 * Female Pin: Copper Alloy, Tin Plated.
 * Cable: UL2464 20AWG+D+AL/My PVC Jacket UV Resistant, Black.
 * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



ALTW
CONFIDENTIAL
2015-07-14
R&D DEPT.