
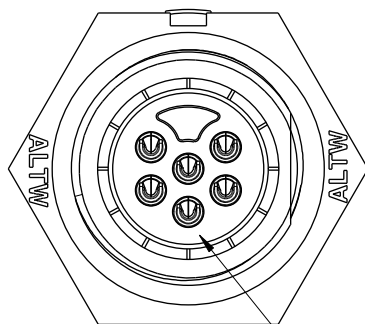
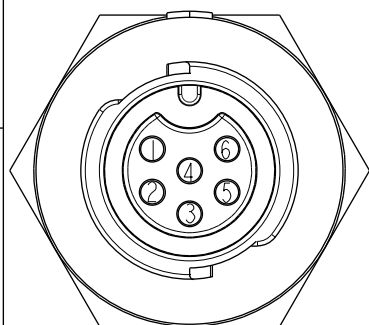

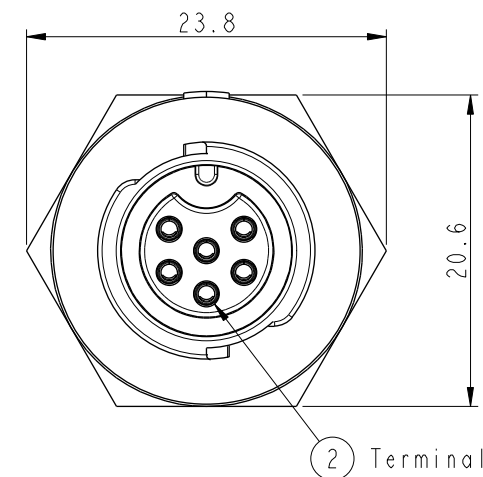
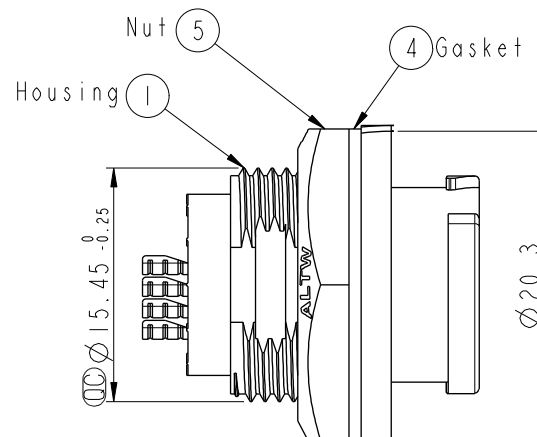



REV.	ECN NO.	DATE	SIGN	DESCRIPTION



Whit Liquid Glue

Pin Assignments
Front View


Recommended Panel Cut-out

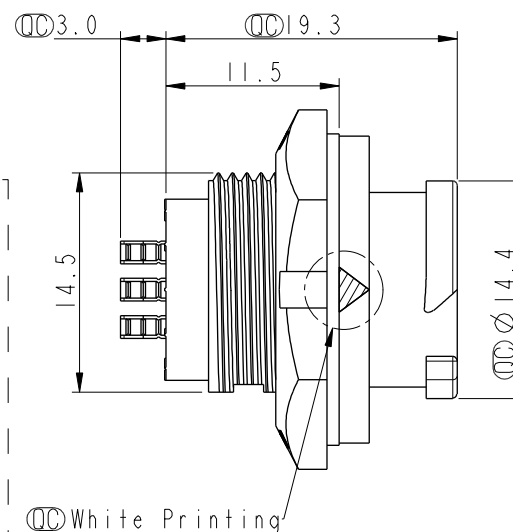

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP68
- * Working Voltage Rating: AC 300 V
- * Working Current Rating: 5A
- * Flame Class: UL94V-0 (UV Resistance)
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Nut: Nylon+GF, Black
- * Gasket: Silicone, Gray
- * Panel Thickness Max: 4.5mm

UNIT:mm

TOLERANCE
.X ±0.25

TITLE

X Lok B-Size
Receptacle M Conn F 6 PinSCALE
2:1SIZE
A4SHEET
1 OF 1REV.
AWC-REV.
A.1 $\varnothing$ Inspection item**Amphenol LTW**
安費諾亮泰企業股份有限公司

ITEM NO

BD-06RMFS-QC8001

DWG NO

BD-06RMFS-QC8001

CUSTOMER

ALTW

DRAWN BY

Micky

CHECKED BY

Spring

APPROVED BY

Kevin

DATE

2014-10-24

DATE

2014-10-24

DATE

2014-10-24