

Datasheet

GNSS Patch Antenna

Embedded

Features:

The patch antenna has much higher efficiency and small form factor, easy mounting with SMT, suitable for mounting inside device.

Applications:

- GNSS enabled devices
- Portable Handsets
- Automotive Navigation
- Marine buoys
- Tracking and Positioning



15 X 15 X 4 mm

GNSS Antenna



Electrical Specifications

Antenna Characteristics By Range Of Receiving Frequency

Frequency (MHz) @Center Frequency	1575.42 $\pm$ 1	1602 $\pm$ 5
Return Loss (dB)	< -10.9	< -10.9
Gain (dBi) @Zenith at 50mm x 50mm ground	2.6	3.4
Bandwidth (MHz) @Return Loss : -10dB	3	4
Efficiency (%)	65	61
Impedance (Ω)	50	50

Mechanical Specifications

Mechanical

Dimension (mm)	15.0 × 15.0 × 4.0
Material	Ceramic
Weight (g)	5.0


Environmental

Temperature Range (°C)	-40 to 105
Humidity	Non-condensing 40°C 95% RH


RoHS Compliant

Mechanical Drawing

Unit : mm

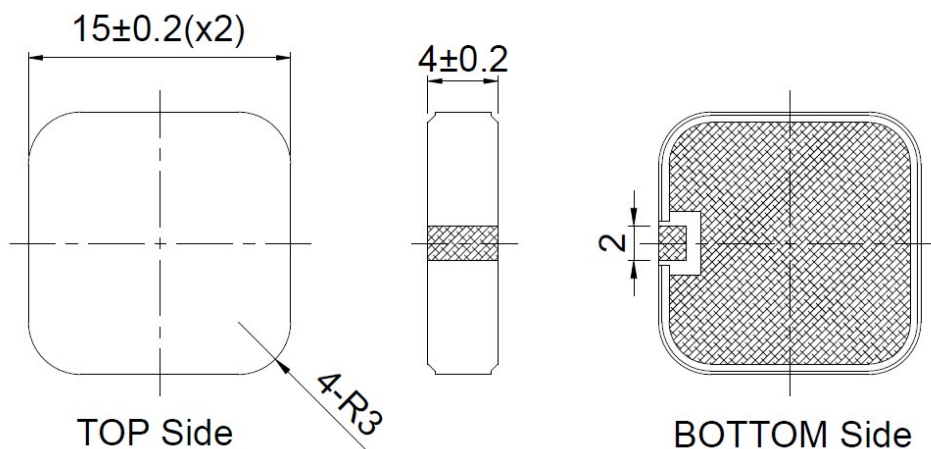


Antenna Testing Includes Evaluation Board

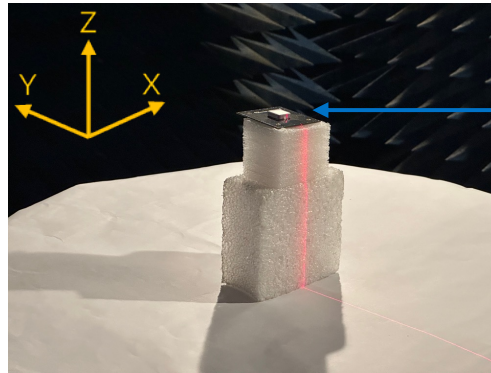


ST0543-00-N10-U

Test setup, measurement performed in 3D anechoic chamber.


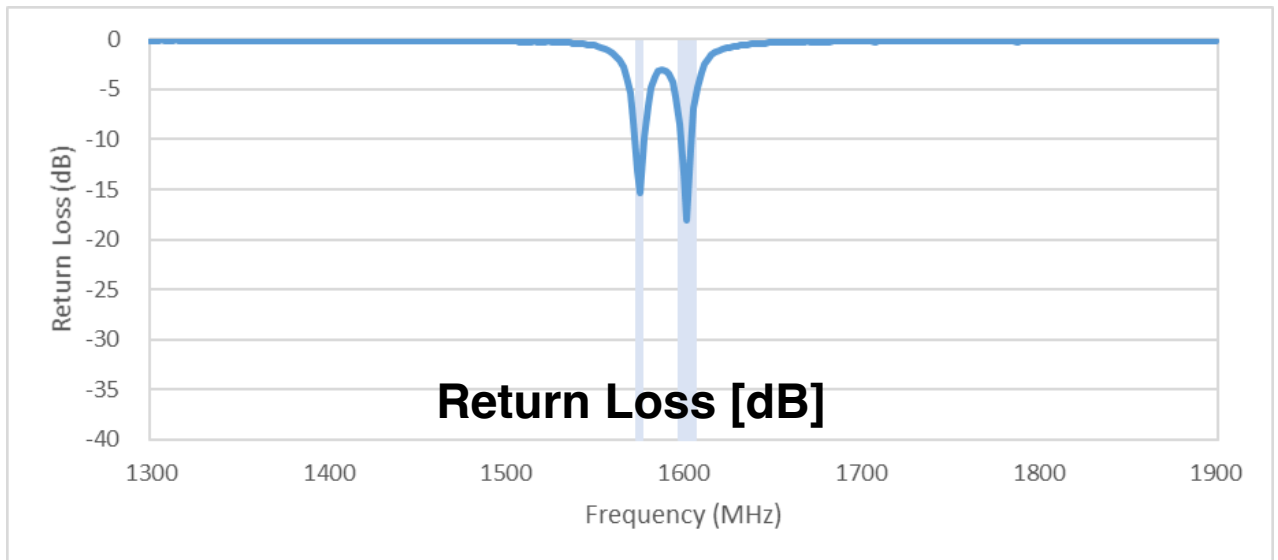


Blue background represents frequency response.


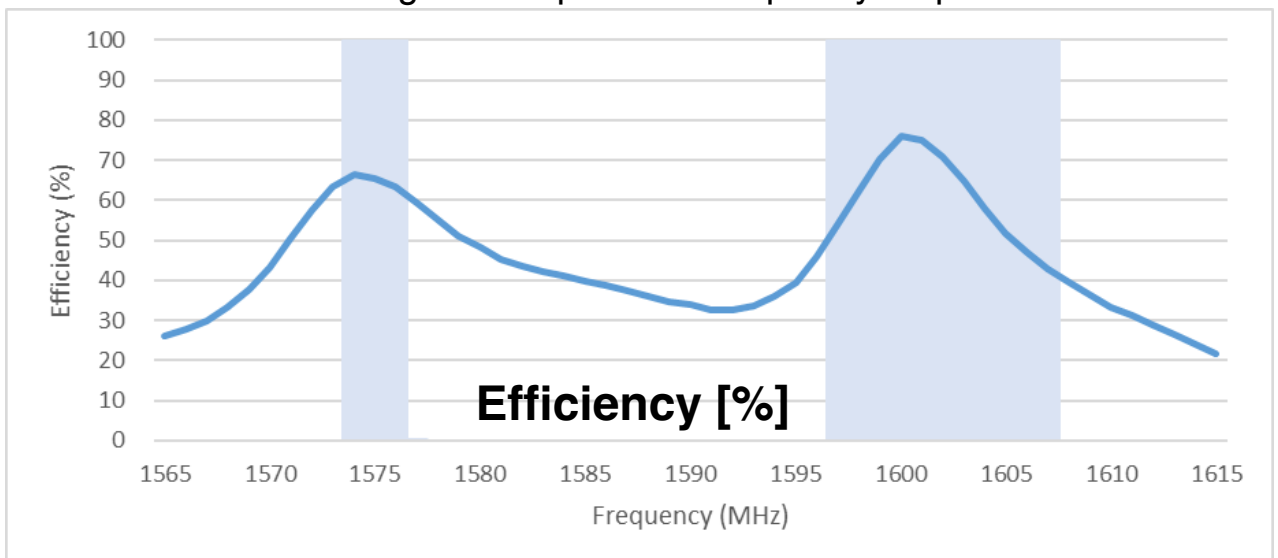


Radiation Pattern - Free Space



XY - Plane

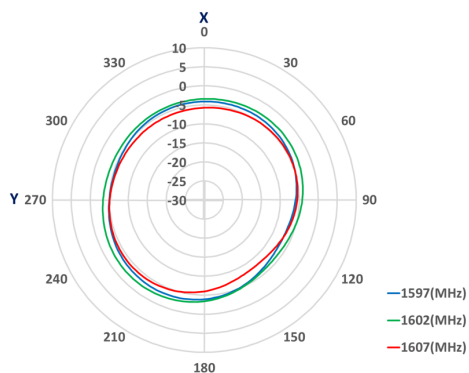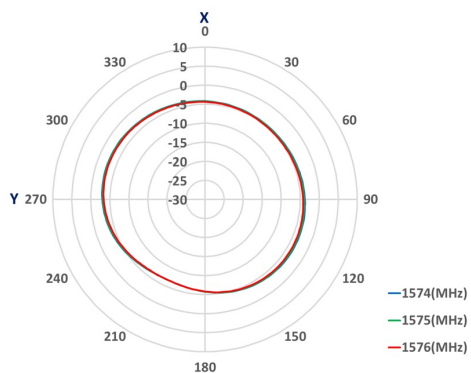

YZ - Plane

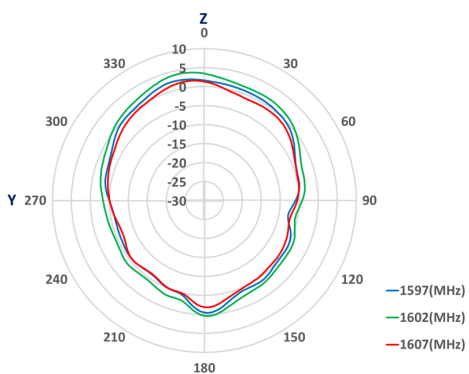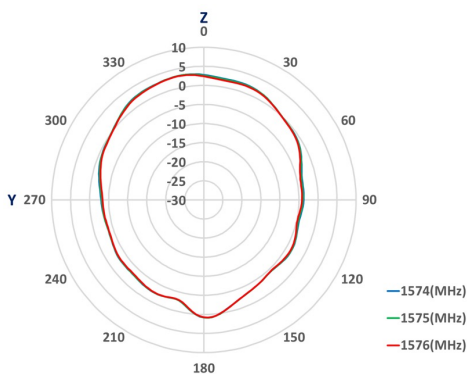


XZ - Plane

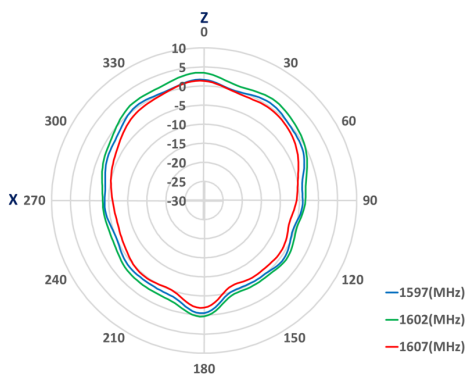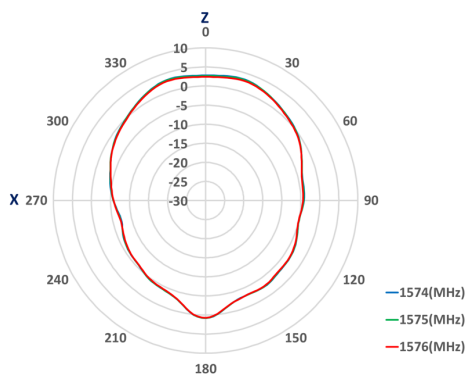

Layout Dimension

Unit : mm

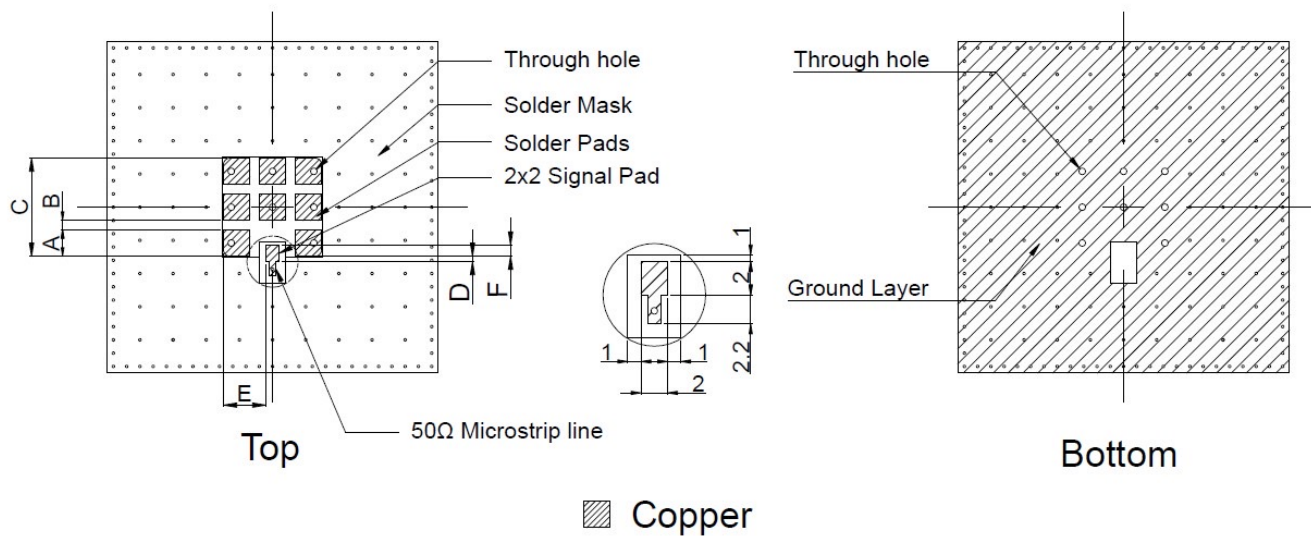

Size						
Type	A	B	C	D	E	F
15x15x4	4±0.2	1.5±0.2	15±0.2	0.4±0.2	6.5±0.2	1.6±0.2


Recommended Reflow Temperature Profile

This products can be assembled following Pb-free assembly. According to the Standard **IPC/JEDEC J-STD-020C**, the temperature profile suggested is as follow :

Reflow Setting

Phase	Profile Features	Pb-Free Assembly (Sn Ag Cu)
PREHEAT	-Temperature min (Ts min.) -Temperature max (Ts max.) -Time (ts) form (Ts min. to Ts max.)	150°C 200°C 60~120 seconds
RAMP-UP	Avg. ramp-up rate (Ts max. to TP)	3°C / second (max)
REFLOW	-Temperature (TL) -Total time above TL (t L)	217°C 30~100 seconds
PEAK	-Temperature (TP) -Time (tp)	260°C 10~20 second
RAMP-DOWN	Rate	6°C / second max.
Time from 25°C to peak temperature		8 minutes max.
Composition of solder paste		96.5Sn / 3Ag / 0.5Cu
Solder paste model		SHENMAO PF606-P26

*Note : All the temperature measure point is on top surface of the component, if temperature over recommend, it will make component surface peeling or damage.

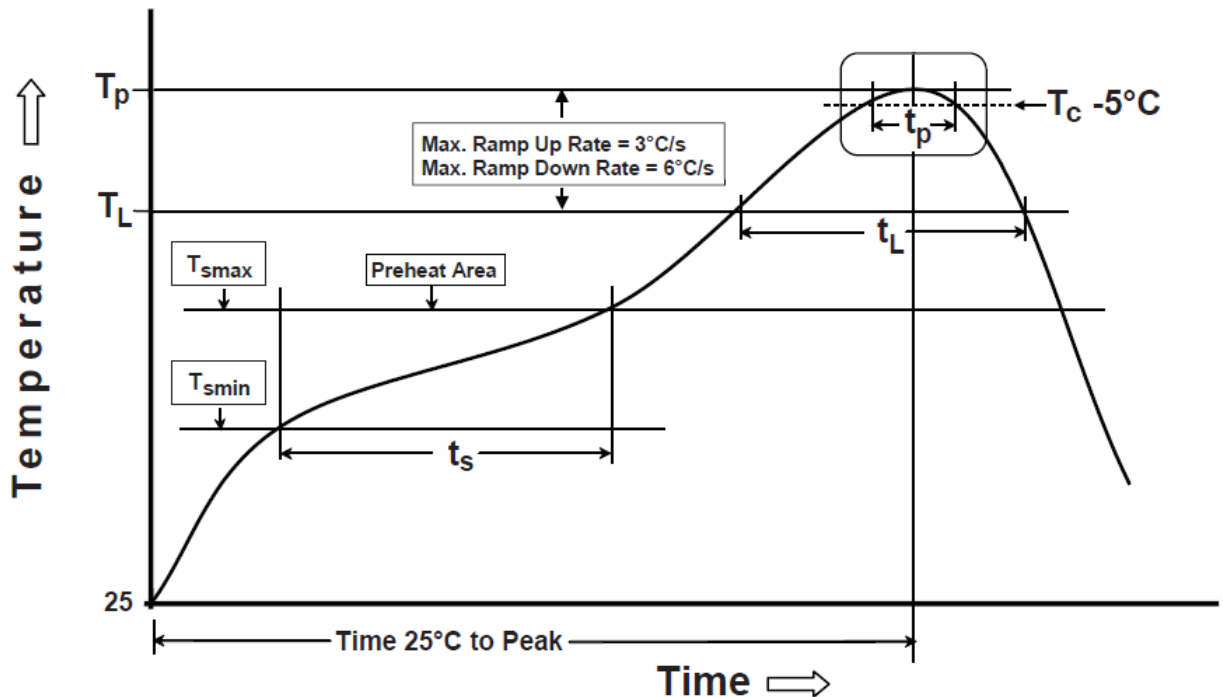

The graphic shows temperature profile component assembly process in reflow ovens.

Soldering With Iron

Soldering condition :

Soldering iron temperature $270 \pm 10^\circ\text{C}$. Apply preheating at 120°C for 2~3 minutes. Finish soldering for each terminal within 3 seconds, if soldering iron over temperature $270 \pm 10^\circ\text{C}$ or 3 seconds, it will make component surface peeling or damage. Soldering iron can not leakage of electricity.

Revisions				
Rev.	Description	Date	ECN	Approval
A	Initial Release	2023-06-17	ST0543-00-N10-U-RA00	ATC

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.