



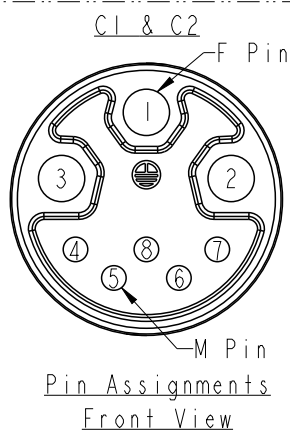

```

XXX: 0.5~99Meters
A05: 0.5 Meter
  1: 01 Meter
  2: 02 Meters
  .
  .
 99: 99 Meters

```

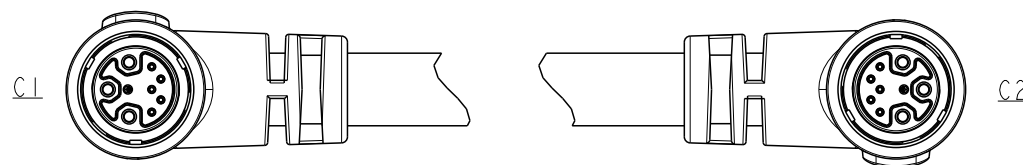

8	Drain	24AWG	地線	8	Twist 對線
7	Green	24AWG	綠	7	
6	White/Green	24AWG	白 / 綠	6	Twist 對線
5	Orange	24AWG	橘	5	
4	White/Orange	24AWG	白 / 橘	4	Twist 對線
3	Blue	16AWG	藍	3	
2	Brown	16AWG	棕	2	
1	Green/Yellow	16AWG	綠 / 黃	1	
C1	Wire Color			C2	
Pin Out					

Note:

- * RoHS Compliant
- *  Important Dimension
- * Waterproof Rate: IP67, Mated.
- * Connector
 - Housing: Thermoplastic, Black.
 - Pin: Copper Alloy, Gold Plated.
 - Nut: Thermoplastic, Black.
 - O-Ring: Rubber, Black.
- * Outer mold: Thermoplastic, Black
- * Cable: UL2464 (24AWG*2P+D+Al/My)+16AWG*3C
+F+P, PVC Jacket, OD=12.0mm, Black.
- * Cable Length Tolerance:

0.5M < L ≤	1M:	+60/-0 mm
1M < L ≤	3M:	+120/-0 mm
3M < L ≤	5M:	+160/-0 mm
5M < L ≤	10M:	±100 mm
10M < L ≤	20M:	±200 mm
20M < L ≤	30M:	±300 mm
30M < L ≤	99M:	±500 mm

UNIT:mm				TITLE ACC, CERES, C-10A+2A, DB-ENDED FF, 3LOCK		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Yunchen		DATE 2025/03/28			
TOLERANCE ±0.5 mm		SCALE 4:5		SIZE A4				SHEET 1 OF 1		DWG NO AA-CBUXXWR-CBUWR-TAXXX		CHECKED BY Aric		DATE 2025/03/28	
		REV. A		WC-REV. A.1				QC: Inspection item		CUSTOMER ALTW		APPROVED BY Neo		DATE 2025/03/28	