



REV	ECN	APPD
—	4785	

NOTES:

1 PARTS GREATER THAN 3 POSITIONS ASSEMBLED WITH APPROPRIATE COMBINATIONS OF 2 AND 3 POSITION MODULES. (3 POSITION MODULE SHOWN)

2 .197 [5mm] PITCH DIMENSIONS INDICATED IN PARENTHESES.

L=PITCH X POSITIONS

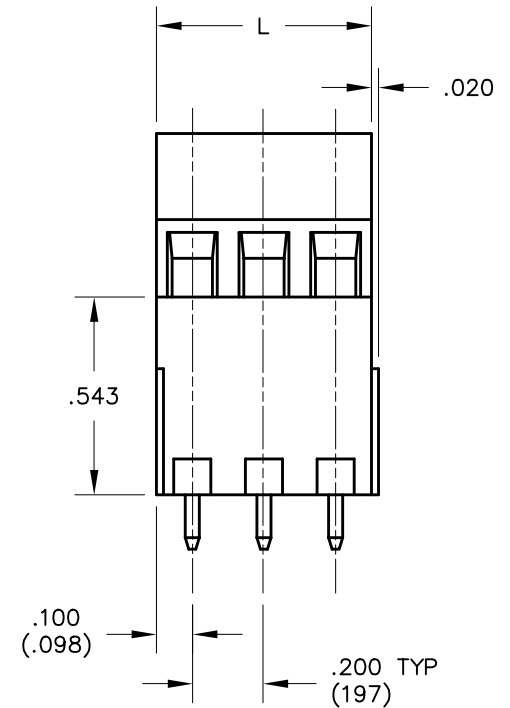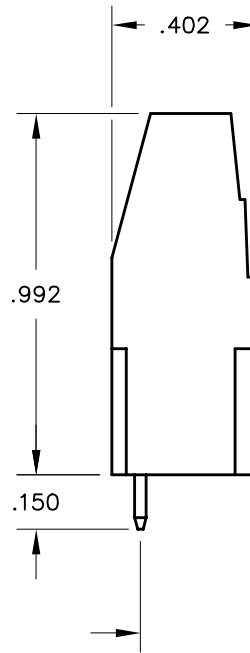

UL RATINGS
CURRENT — 17.5A
VOLTAGE — 300V
U.L. FILE NO.
SA RATINGS
CURRENT — 17.5A
VOLTAGE — 300V
CSA FILE NO.

ESMTXXX20

1 NUMBER OF POSITIONS

2 PITCH:
1=.197[5MM]
2=.200[5.08MM]

INSTALLATION RECOMMENDATIONS

WIRE RANGE: 12–30 AWG
WIRE STRIP LENGTH: .216–.256
TIGHTENING TORQUE: 4.4 LB-IN.


MATERIALS

HOUSING: POLYAMIDE 6,6, COLOR: BLACK
CONTACT: COPPER ALLOY, TIN PLATED
SCREW / CAGE CLAMP: COPPER ALLOY, NICKEL PLATED

OPERATING TEMPERATURE RANGE: –40°C TO 110°C
RECOMMENDED PCB THICKNESS: .110 MAX

DIN VDE 0627:1986
DIN VDE 0110–1:1989
EN 60947–1:1991
EN 60947–7–1:1992

CURRENT — 17.5A
VOLTAGE — 250V
TUV FILE NO.



DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2°	PROJECTION 	SPECIFICATION DRAWING		 TITLE ESMT TERMINAL BLOCK MID PROFILE, MID TOWER .200/.197 PITCH		
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		ENGR B. JAWORSKI 11/1/01		SIZE A		
			CHKD		DWG NO. ESMT02120		
			APPD		REV —		
					CODE: 58982		
				SCALE: NONE		SHEET 1 OF 1	