
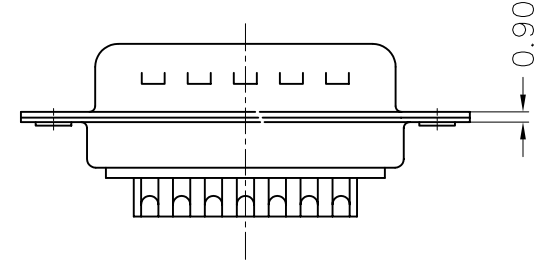



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

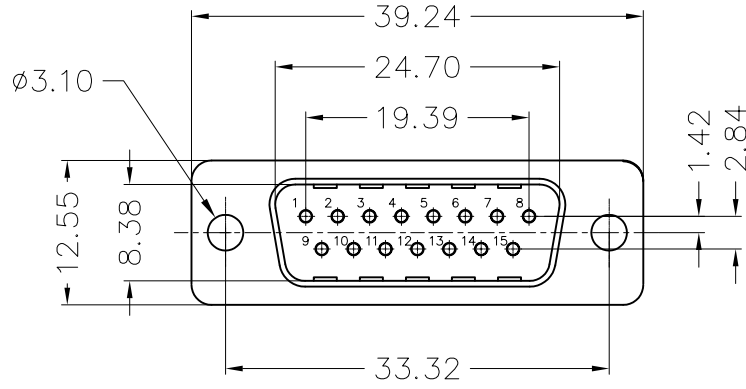


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A			07/02/07	

D-SUB TECHNICAL DATA

SHELL : Steel 50u" min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0 Color Black
 CONTACTS : brass, gold flash over 50u" min nickel
 ELECTRICAL : Voltage rating : 600 V Rms to 50 Hz
 Current rating :5A
 Withstanding Voltage >1000 V Rms to50 Hz for one minute
 Insulation resistance >5000 M Ohms
 Contact resistance 25 mOhms max.
 CLIMATIC : Temperature range -55 °C up to 125°C
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 717 SD A 15 P

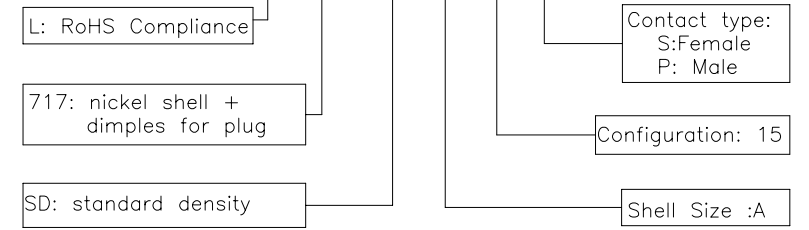

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE
	U.S.	METRIC	
.X +/-	0.50		DRAWN Lisa.peng 07/02/07
.XX +/-	0.30		CHECKED tik.wang 07/02/07
.XXX +/-	0.20		CHECKED
FRACTIONS +/-		2'	
ANGLES +/-			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :	
REMOVE SHARP EDGES		ANGLE OF PROJECTION	
DIMENSIONS			
U.S.	INCHES		
METRIC	MM		

Amphenol			
TITLE Stamped and Formed contacts, SD series			
SIZE	DRAWING NO.	REV.	
A4	C L717SDA15P	A	
SCALE	NONE	SHEET 1 OF 1	