




FEMALE

Specifications

Contact Resistance: 30m max. at DC 100mA
Insulator Resistance: 1000M min. at DC 500V
Current Rating: 3 AMP
Dielectric Withstanding
Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C ~ +125°C
Contact: Brass, selective gold
Housing: PBT & 30% Glass Fiber (UL 94V-0)

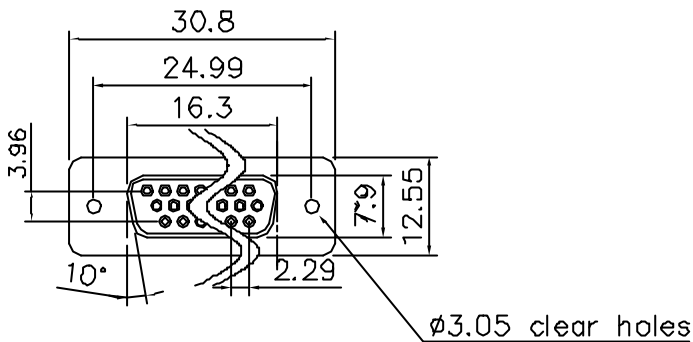

Drawing number	Contact plating
L 77HDE15SOL2	Gold flash
L 177HDE15SOL2	15μ inches
L 77HDE15SOL2C309	30μ inches

TOLERANCE m/m		APPROVALS		DATE		TITLE 17HD SERIES HIGH DENSITY D-SUB CONNECTORS STRAIGHT PCB MOUNT SOCKET	AMPHENOL		
X.	±0.5		C.R.	14/11/01	AMPHENOL SOCAPEX				
X.X	±0.3		J.F.L	14/11/01	Dole Plant				
X.XX	±0.2		J.F.L	14/11/01	Scale N.A.		Sheet 1 of 1		
			UNIT : MM	SIZE : A4	DRAWING N° L77HDE15SOL2----			REV : A	