

PT/MPO Harsh Environment Assemblies

The Industrial PT/MPO leverages the proven MIL spec 26482 connector system to provide an environmental seal and mechanical protection for a multi-fiber MPO style connector.

The metal bayonet connector system is quick to deploy, requiring only ¼ turn. It is a metal construction and has a positive latching system (both audible and visual).

The PT/MPO system uses a feed-thru style receptacle allowing industry standard MPO patch cables to be used inside the enclosure allowing simple connection to QSFP or can be used with a breakout cable for discrete or SFP connections.

Amphenol's PT/MPO connectors are exceptionally suited for WiMax, LTE, and other wireless and base station applications requiring more than 2 fibers. The PT/MPO is capable of performing in even the toughest environments.



Features/ Benefits

- Complies to applicable sections of MIL 26482
- Complies to TIA/EIA 604-5 and IEC61754-7
- Meets IP67 dust and water ingress specifications
- >100lbf axial cable retention
- Available in singlemode and multimode versions
- Fiber counts 4, 8, 12, and 24
- Submersible to depths of 20 feet (intermittent exposure)
- Excellent vibration characteristics
- Receptacle accepts standard MPO cable assemblies for internal connection

Common Specifications

Insertion Loss:

Multimode	0.25dB Typ.
	<0.75dB Max
Singlemode	0.38dB Typ.
	<0.75dB Max

Return Loss:

Multimode	≤ -25dB
Singlemode	≤ -55dB


Operating Temperature: -40 to +85°C

Durability: >200 cycles

AARC Harsh Environment Interconnect

PT/MPO Plug Assembly

Shown Here: PT/MPO Pigtail Assembly with 4 fiber outdoor ribbon cable

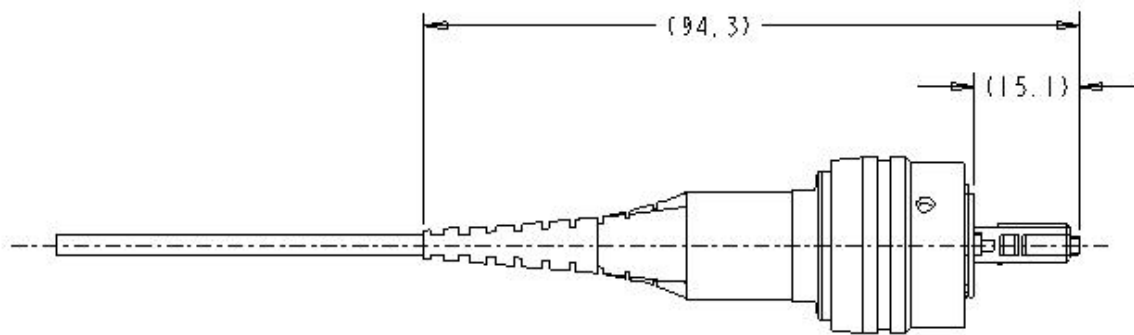

PT/MPO Rear Mount Receptacle 955-220-5001

All dimensions in Millimeters

