
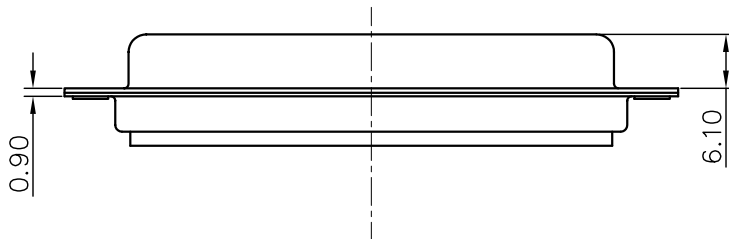



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

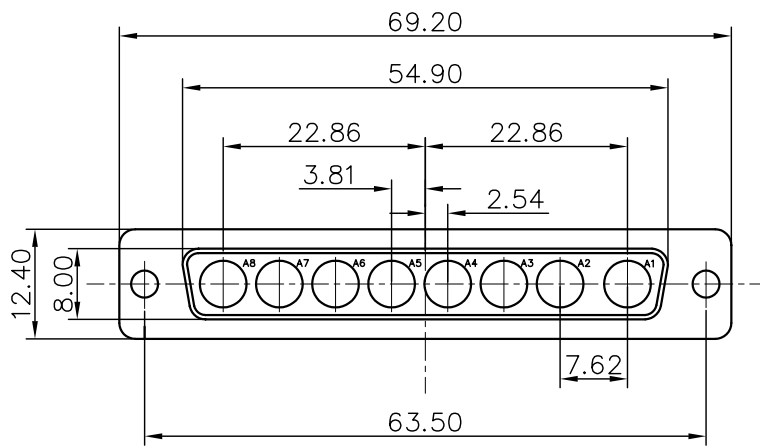

Customer drawing

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			10/30/07	

D-SUB TECHNICAL DATA

SHELL : Steel 2.5um(100u") min tin over 1.25um(50u") min nickel
BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0
ELECTRICAL :Withstanding Voltage >1000 V RMS at 50 Hz for one minute
Insulation resistance >5000 M Ohms
CLIMATIC : Temperature range -55 °C up to 155°C
Damp heat 56 days(40 °C-95% HR)
MARKING : Amphenol...(Series No.)
Manufacturing date
Commercial reference

PRODUCT CODE

L 77TW C 8W8 S

L: RoHS Compliance

77TW: tinned shell with receptacle

Shell Size :C

Contact type:
S:Female
P: Male

Configuration: 8W8

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	Checked	10/30/07
.X +/-	0.50	CHECKED	Terry.xie	10/30/07
.XX +/-	0.30	CHECKED		
.XXX +/-	0.20			
FRACTIONS +/-				
ANGLES +/-	2°			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol			
TITLE Hybrid D-SUB connectors, TW series			
SIZE	DRAWING NO.	REV.	
A4	C L77TWC8W8S	1	
SCALE	NONE	SHEET 1 OF 1	