

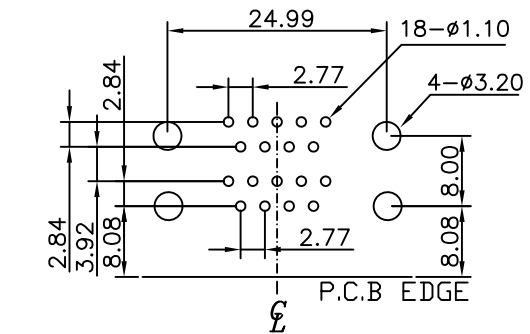


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

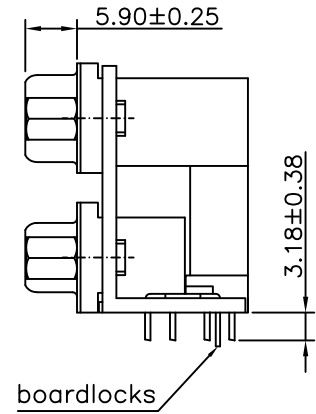

RECOMMENDED P.C.B LAYOUT
(TOLERANCE +/-0.03)

Customer drawing

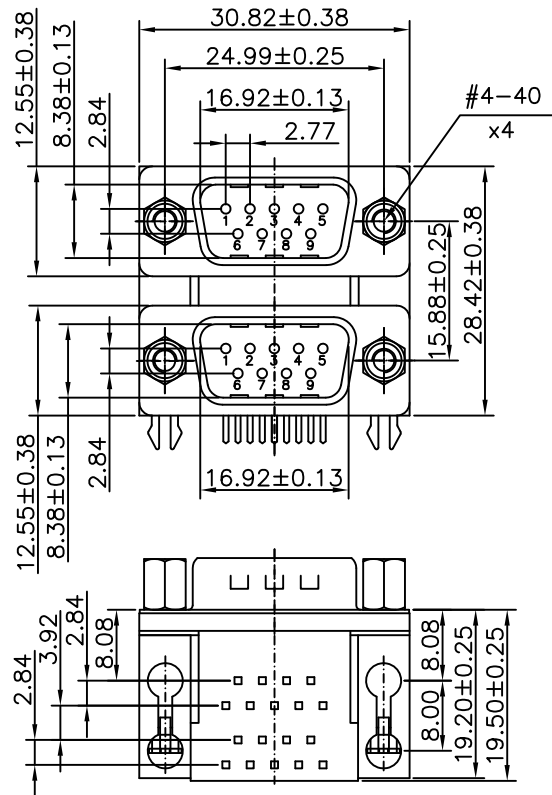


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HKXXXX	First release	12/08/11'	IP

D-SUB TECHNICAL DATA

SHELL : Steel, 100u" min. tin over 50u" min. nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0 Color Black
 CONTACTS : Copper alloy,
 Gold flash over 50u" min. nickel on mating area.
 100u" min. tin over 50u" min. nickel on solder area
 BOARDLOCK : Copper alloy. 100u" min. tin over 50u" min. nickel
 SCREWLOCK : Brass. 100u" min. tin over 50u" min. nickel
 BRACKET : Znic alloy. 100u" min. tin over 50u" min nickel
 ELECTRICAL : Voltage rating :250 V Rms to 60 Hz
 Current rating :3A
 Withstanding Voltage >1000 V Rms to 60 Hz for one minute
 Insulation resistance >1000 M Ohms
 Contact resistance 25 mOhms max.
 CLIMATIC : Temperature range -55 °C up to 125°C
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 17H 1110121

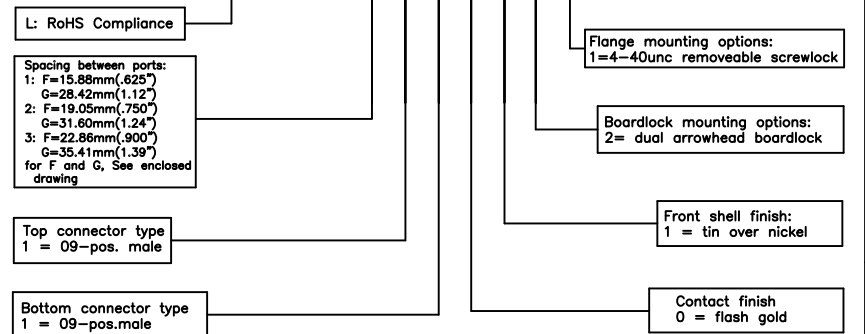

UNLESS OTHERWISE SPECIFIED TOLERANCES	APPROVAL		DATE
	U.S.	METRIC	
.X +/-	0.50	DRAWN	Blin Di 12/08/11'
.XX +/-	0.30	CHECKED	Tony Tang 12/08/11'
.XXX +/-	0.20	CHECKED	
FRACTIONS +/-		DRAWING FILE :	
ANGLES +/-	2'	ANGLE OF PROJECTION	
FOR MATERIALS AND FINISHES SEE NOTES			
REMOVE SHARP EDGES			
DIMENSIONS			
U.S.	INCHES		
METRIC	MM		

Amphenol		
Amphenol East Asia Limited		
TITLE D-SUB contacts , Dual port L17H Series		
SIZE	DRAWING NO.	REV.
A4	C L17H1110121	1
SCALE	NONE	SHEET 1 OF 1