


2.5 mm MIS AMP-IN (V)

Product Features

- ※ Eliminates need for Header by direct soldering into PCB.
- ※ 2p through 13p vertical.
- ※ Polarized and non-polarized versions available.
- ※ Three wire ranges: AWG 26-28 and AWG with two contact types.
- ※ Slot shape same as Receptacle.
- ※ Total cost reduction through IDC (Insulation Displacement Contact) using DECAM and Header for radial auto insertion machine.
- ※ 66 nylon housing.
- ※ Pre-tinned Phosphor Bronze.
- ※ DECAM common use for Receptacle and AMP-IN.
- ※ DECAM Advantages: more machine variety, shorter cycle time, wide coverage of harness length, harness checker as standard unit and greater productivity.

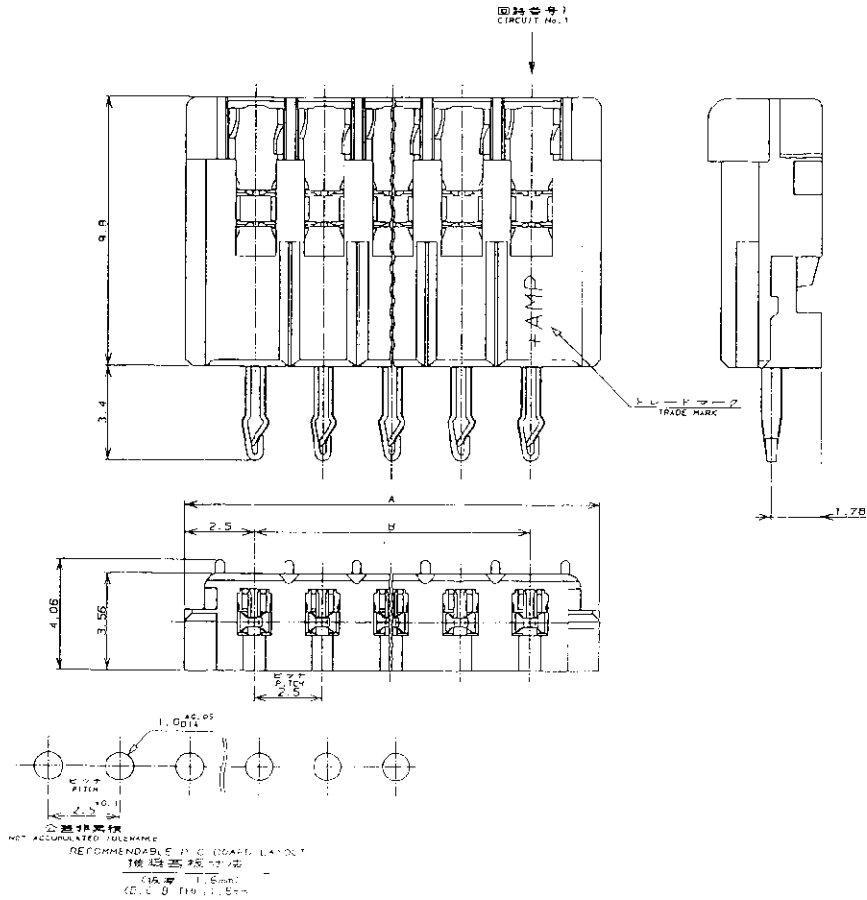

Product Specifications:
108-5421

Application Specifications:
114-5174

No. of Positions	Dimensions		Part No. of Receptacle Assembly		
	A	C	Black (#24)	Natural (#26)	Blue (#22)
2	7.48	2.5	0-0179436-2	0-0179414-2	0-0917859-2
3	9.98	5.0	0-0179436-3	0-0179414-3	0-0917859-3
4	12.48	7.5	0-0179436-4	0-0179414-4	0-0917859-4
5	14.98	10.0	0-0179436-5	0-0179414-5	0-0917859-5
6	17.48	12.5	0-0179436-6	0-0179414-6	0-0917859-6
7	19.98	15.0	0-0179436-7	0-0179414-7	0-0917859-7
8	22.48	17.5	0-0179436-8	0-0179414-8	0-0917859-8
9	24.98	20.0	0-0179436-9	0-0179414-9	0-0917859-9
10	27.48	22.5	1-0179436-0	1-0179414-0	1-0917859-0
11	29.98	25.0	1-0179436-1	1-0179414-1	1-0917859-1
12	32.48	27.5	1-0179436-2	1-0179414-2	1-0917859-2
13	34.98	30.0	1-0179436-3	1-0179414-3	1-0917859-3