
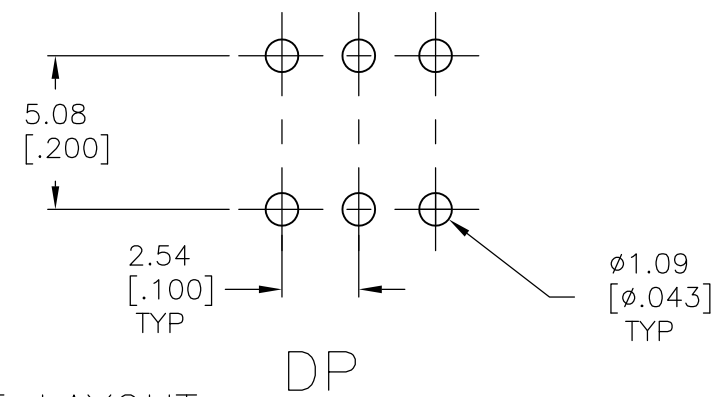
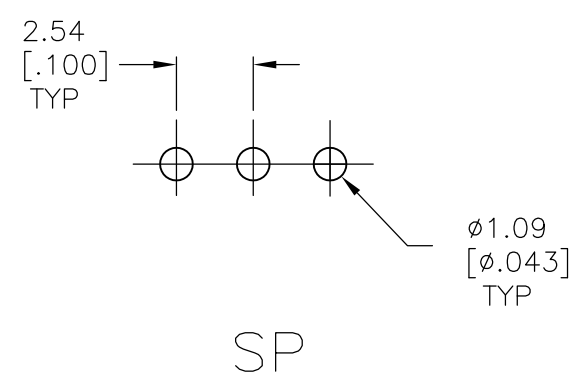
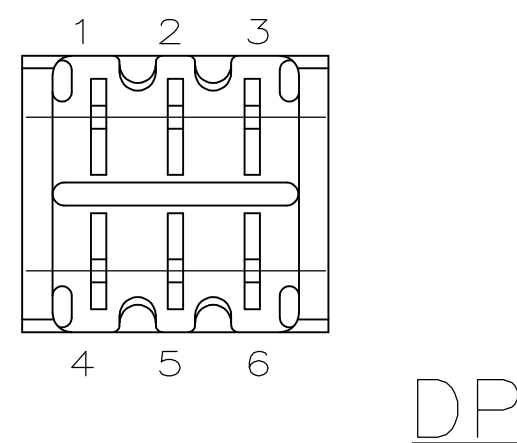
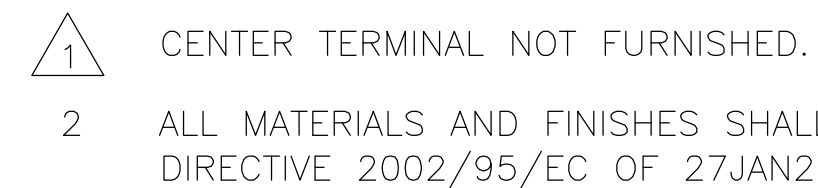






RECOMMENDED HOLE LAYOUT
LAYOUT TOLERANCES $\pm 0.05[.002]$

TE P/N	Alco P/N	Actuator Flush/ Extended	Position	Type			
1571982-1	TSS11DGPC04	Extended	2	SPDT	1,2	None	2,3
1571982-2	TSS11DG1PC04	Flush	2	SPDT	1,2	None	2,3
1571982-3	TSS11EG1PC04	Flush	3	SPDT	1,2	Off	2,3
1571982-4	TSS11EGPC04	Extended	3	SPDT	1,2	Off	2,3
1571982-5	TSS21KGPC04	Extended	2	DPDT	1-3, 4-6	None	Off
1571982-6	TSS21NG1PC04	Flush	2	DPDT	1-2, 4-5	None	2-3, 5-6
1571982-7	TSS21NGPC04	Extended	2	DPDT	1-2, 4-5	None	2-3, 5-6
1571982-8	TSS21PG1PC04	Flush	3	DPDT	1-2, 4-5	Off	2-3, 5-6
1571982-9	TSS21PGPC04	Extended	3	DPDT	1-2, 4-5	Off	2-3, 5-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER	28FEB2006	 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK M.SARVER	-		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.SARVER	-	NAME SLIDE SWITCH TSS11 AND TSS21 SERIES	
		PRODUCT SPEC -			
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[.010] 3 PLC ± - 4 PLC ± - ANGLES ± -	APPLICATION SPEC		SIZE A2	
		-			
MATERIAL	FINISH	WEIGHT	-	CAGE CODE	DRAWING NO
-	-	-	-	00779	C-1571982
CUSTOMER DRAWING				SCALE	1:1
				SHEET	1 OF 1
				REV	B