


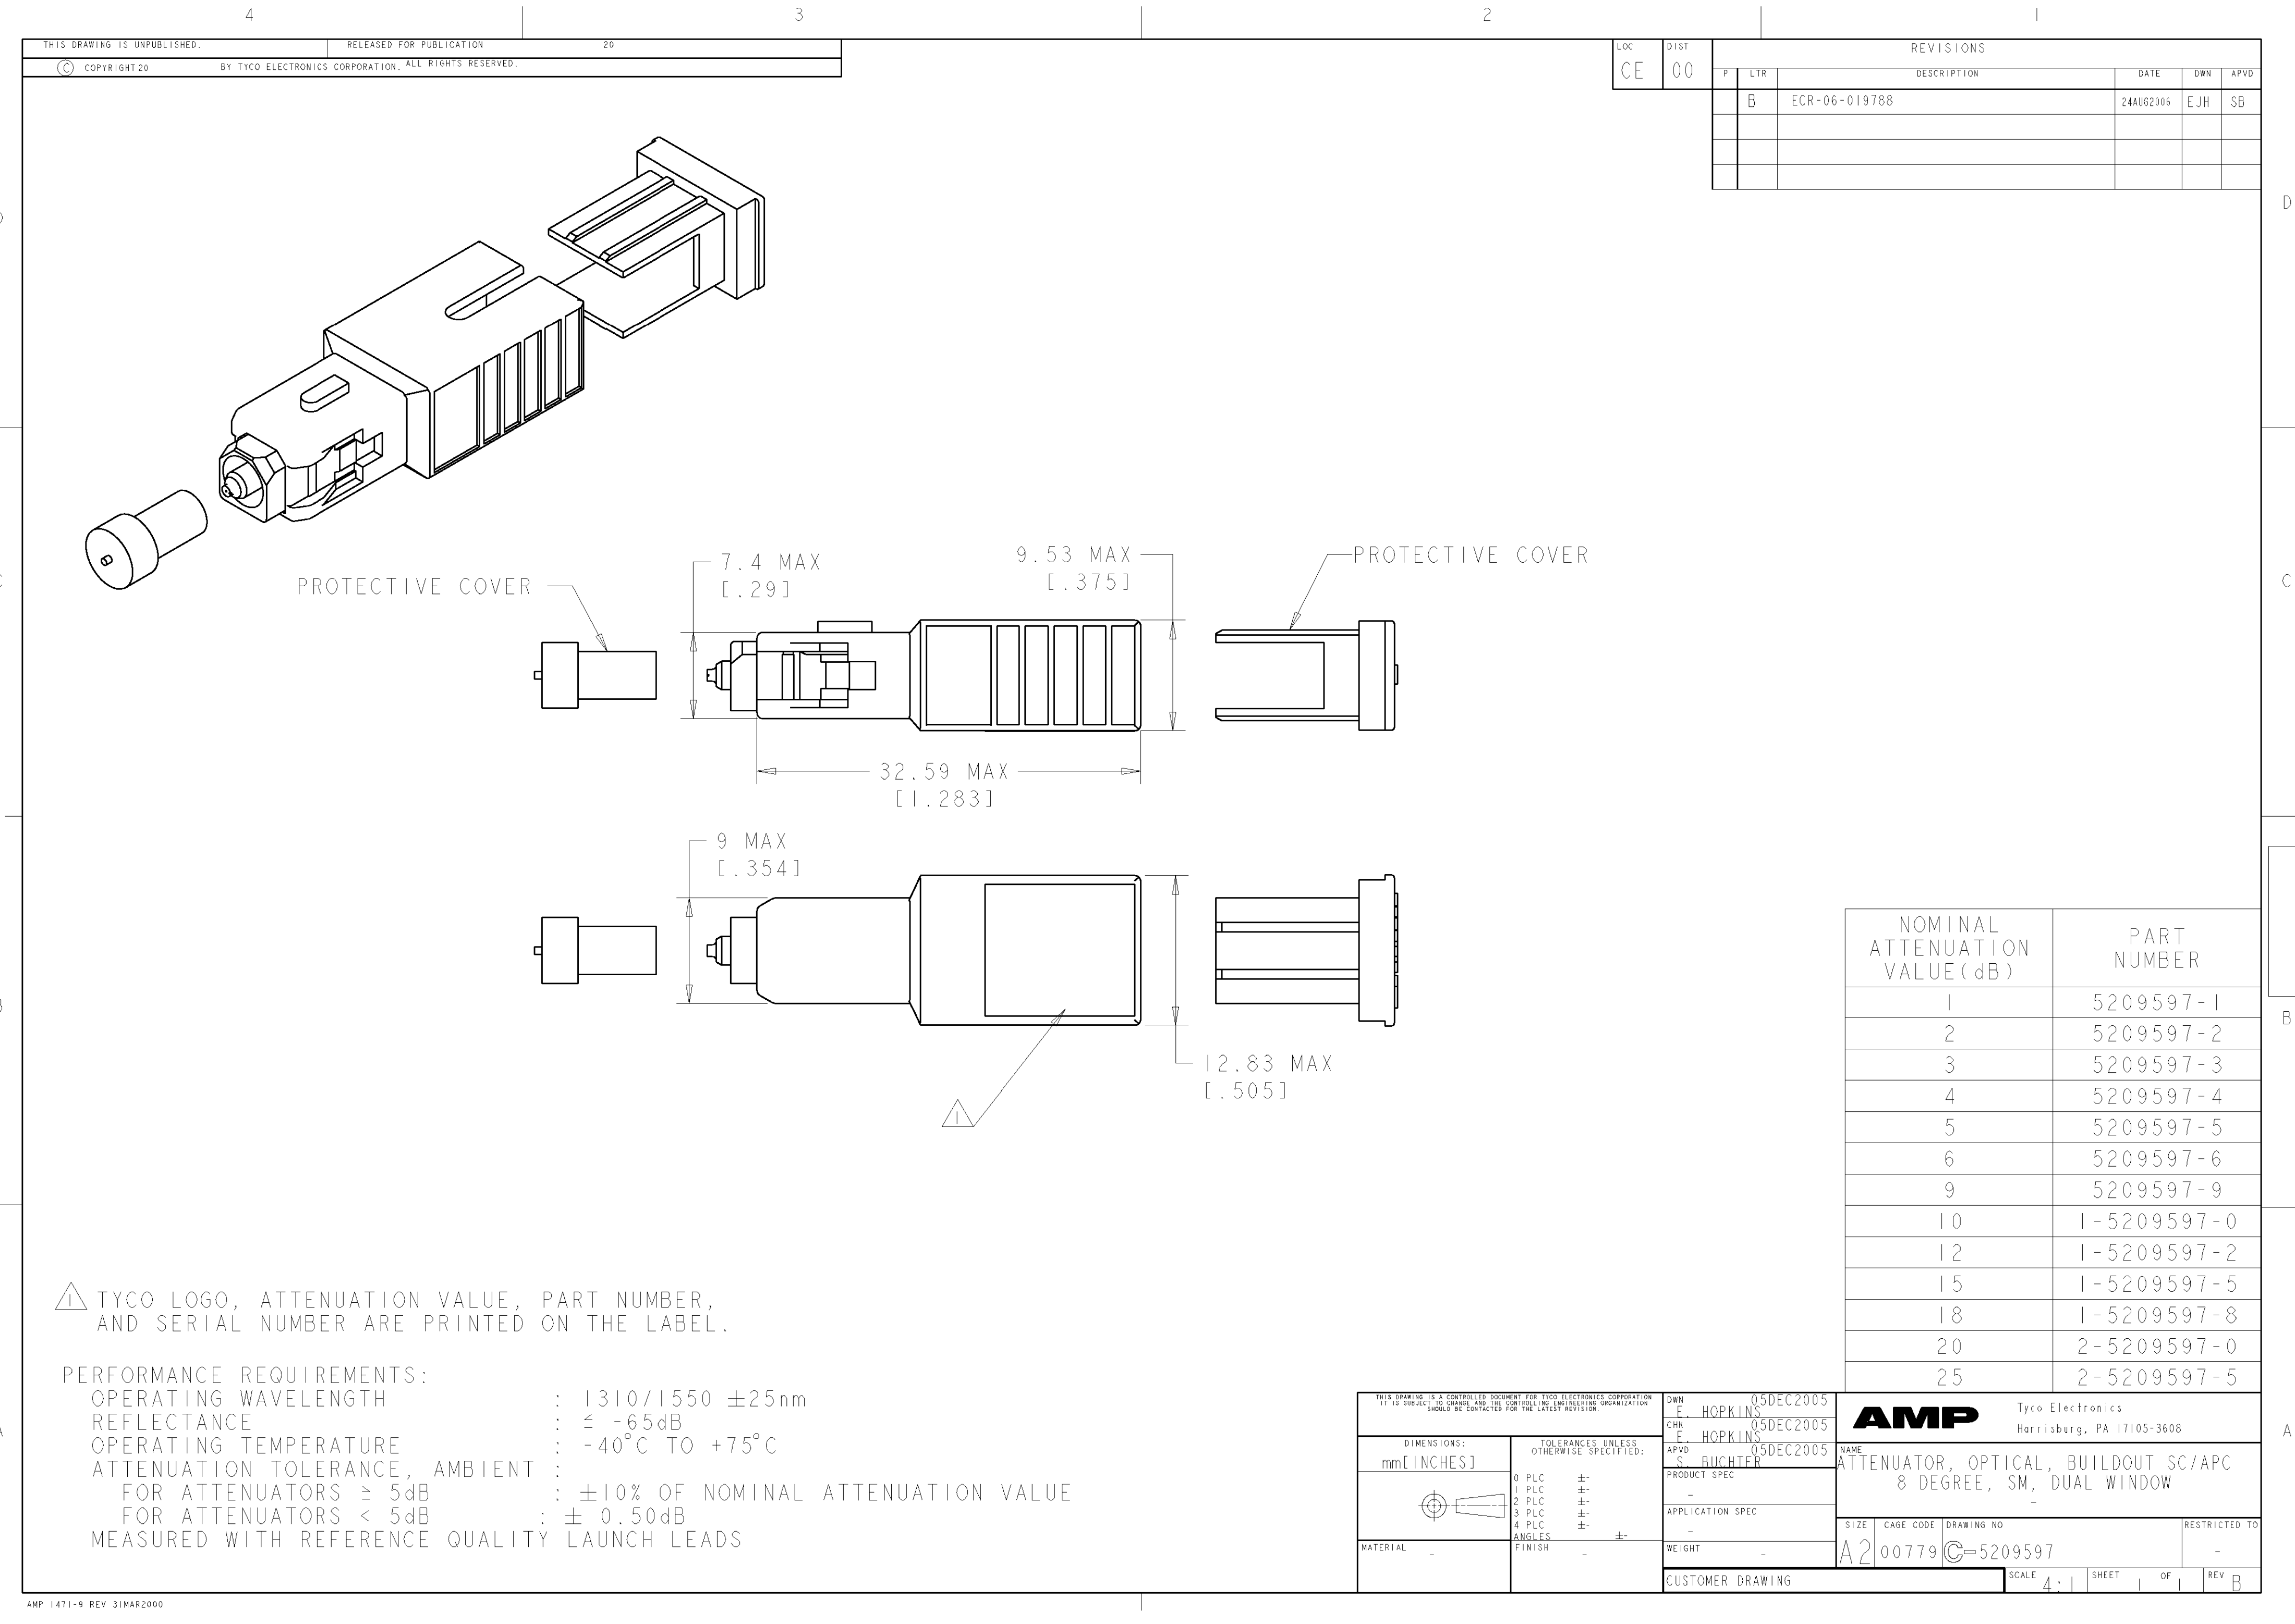

⚠ TYCO LOGO, ATTENUATION VALUE, PART NUMBER, AND SERIAL NUMBER ARE PRINTED ON THE LABEL.

PERFORMANCE REQUIREMENTS:

OPERATING WAVELENGTH	: 1310/1550 ±25nm
REFLECTANCE	: ≤ -65dB
OPERATING TEMPERATURE	: -40°C TO +75°C
ATTENUATION TOLERANCE, AMBIENT	:
FOR ATTENUATORS ≥ 5dB	: ±10% OF NOMINAL ATTENUATION VALUE
FOR ATTENUATORS < 5dB	: ± 0.50dB
MEASURED WITH REFERENCE QUALITY LAUNCH LEADS	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm[INCHES]

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	-

DWN
E. HOPKINS
05DEC2005

CHK
E. HOPKINS
05DEC2005

APVD
S. BUCHTER
05DEC2005

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

NAME
ATTENUATOR, OPTICAL, BUILDOUT SC/APC
8 DEGREE, SM, DUAL WINDOW

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	5209597	-

SCALE	4.1	SHEET	1	OF	1	REV	B
-------	-----	-------	---	----	---	-----	---

AMP Tyco Electronics
Harrisburg, PA 17105-3608

NOMINAL ATTENUATION VALUE (dB)	PART NUMBER
1	5209597-1
2	5209597-2
3	5209597-3
4	5209597-4
5	5209597-5
6	5209597-6
9	5209597-9
10	1-5209597-0
12	1-5209597-2
15	1-5209597-5
18	1-5209597-8
20	2-5209597-0
25	2-5209597-5