
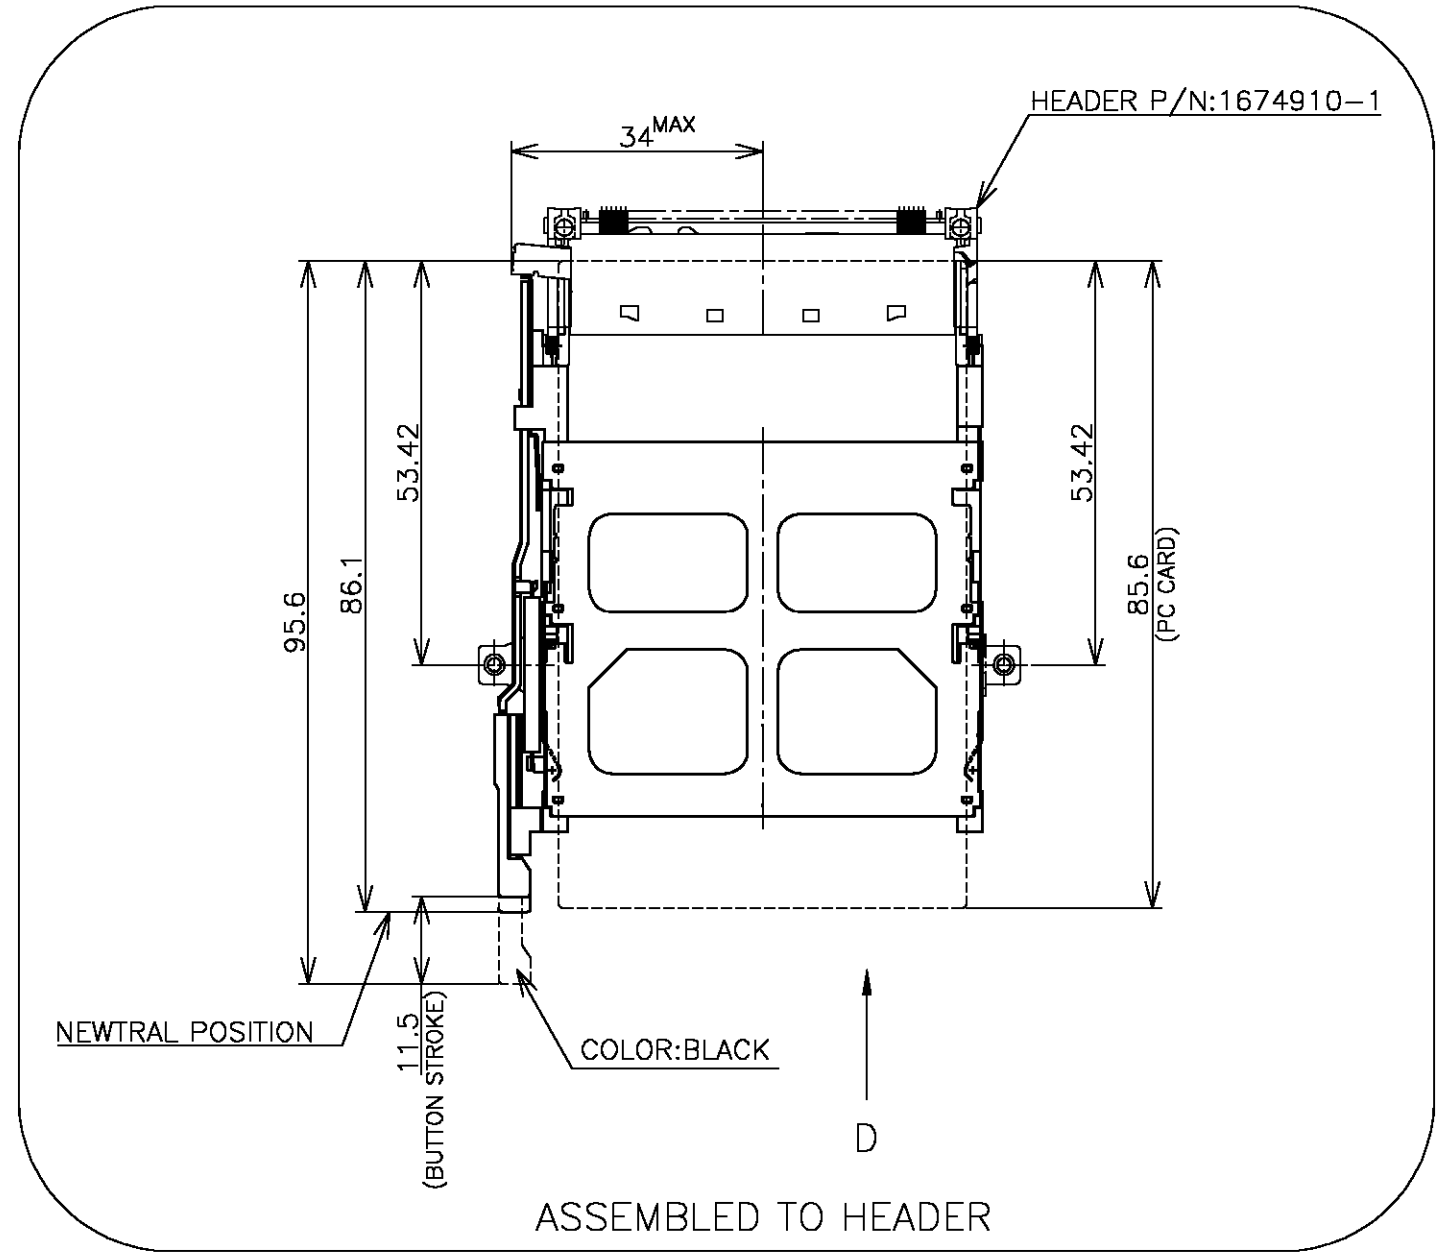


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 2003 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
			0	RELEASED(FJBO-0137-04)	9FEB04	E.L	H.M

1674983-1;AS SHOWN

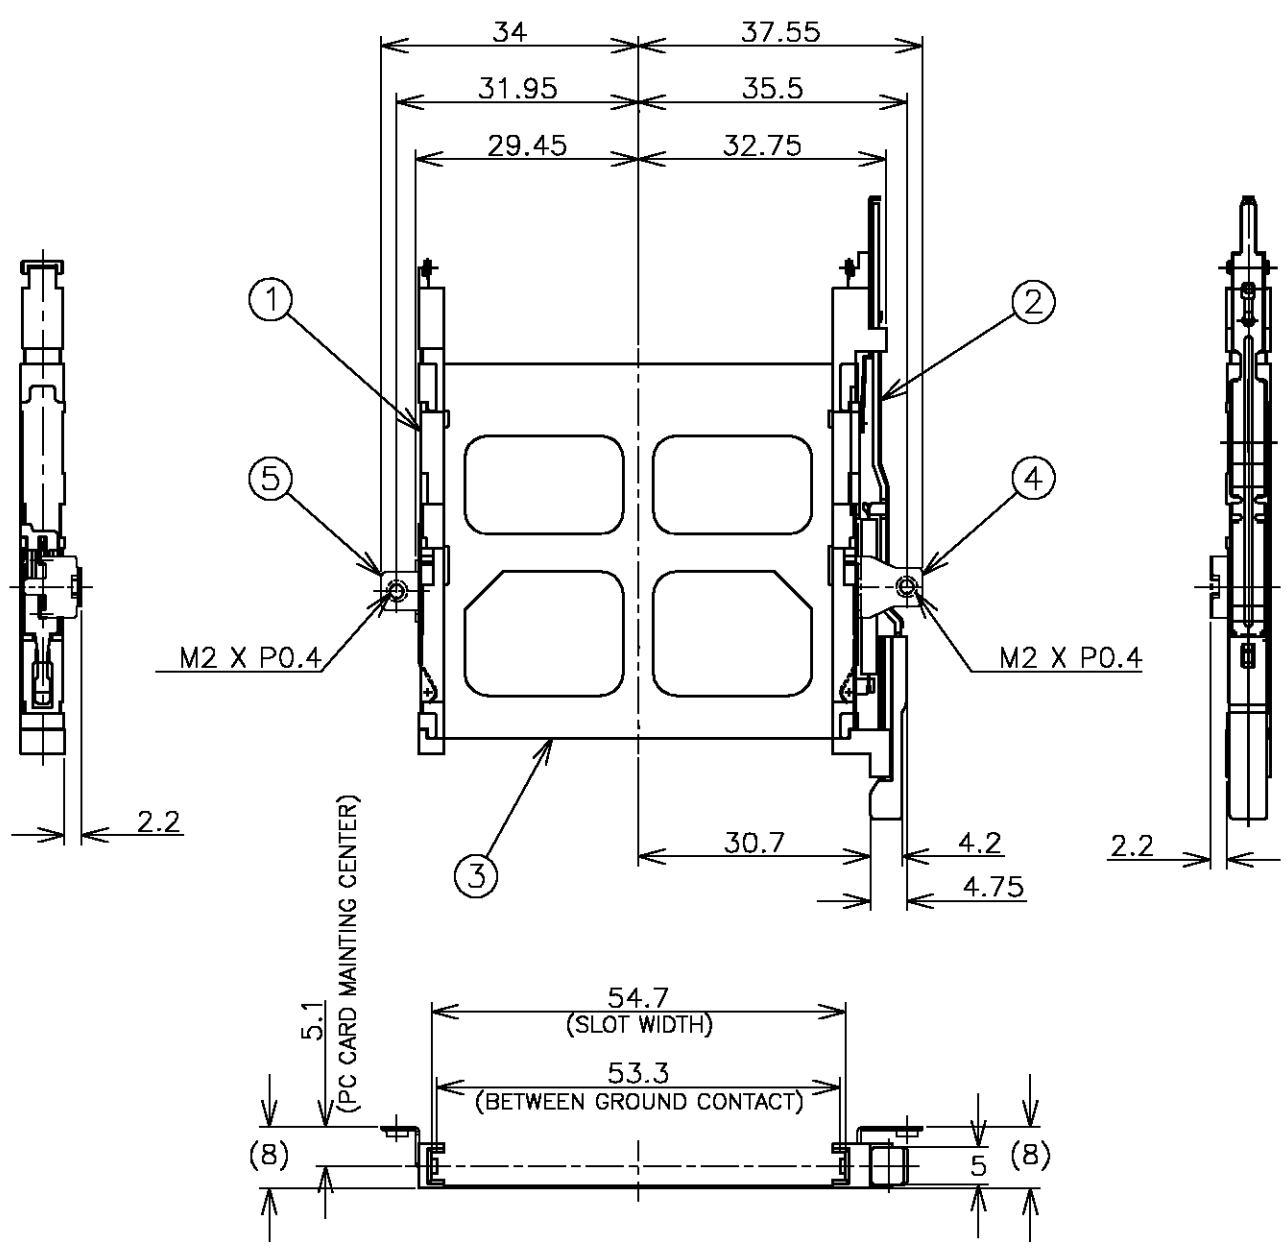

- 1 RECOMMENDED TIGHTENING TORQUE : 0.15~0.2Nm(1.5~2kgf•cm)
- 2 WHEN SCREW LOCK TO THE EJECTOR, PLEASE SUPPORT THE BOTTOM SIDE OF BRACKET AS SHOWN.(REFERENCE SPEC : 411-5942)
- 3 APPLIED CARD : PCMCIA ATTRIBUTE PC CARD.
- 4 HANDLING OF THIS PRODUCT REFER TO THE APRICATION SPEC.(411-5942)

1	BRACKET (WITHOUT BUTTON SIDE)	5
1	BRACKET (BUTTON SIDE)	4
1	SHIELDING SHELL (LOWER)	3
1	PUSH PUSH SUB ASS'Y	2
1	HSG ARM (WITHOUT BUTTON SIDE)	1
QTY	NAME	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.LIU 9APR03	<b>tyco</b> Tyco Electronics AMP K.K Kawasaki, Japan	
DIMENSIONS: 単位: 耗 mm		CHK S.WATANABE 9FEB04	NAME H.MURAMATSU 9FEB04	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		PRODUCT SPEC 製品規格 108-5678	CARDBUS CONNECTOR SINGLE SLOT BOTTOM MOUNT PUSH-PUSH TYPE (RIGHT BUTTON, STAND OFF 2.2)	
MATERIAL 材料		FINISH 仕上	APPLICATION SPEC 取付適用規格 411-5942	RESTRICTED TO
		WEIGHT 8.1g	SIZE A3	CAGE CODE 00779
		DRAWING NO C-1674983		
CUSTOMER DRAWING		SCALE 尺度 1:1	SHEET 1 OF 2	REV 0

