
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


| LOC | DIST |
|---|---|
| J | — |

REVISIONS 変更


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | D1 | REVISED ECR-06-003257 | 10FEB06 | TS | KB |

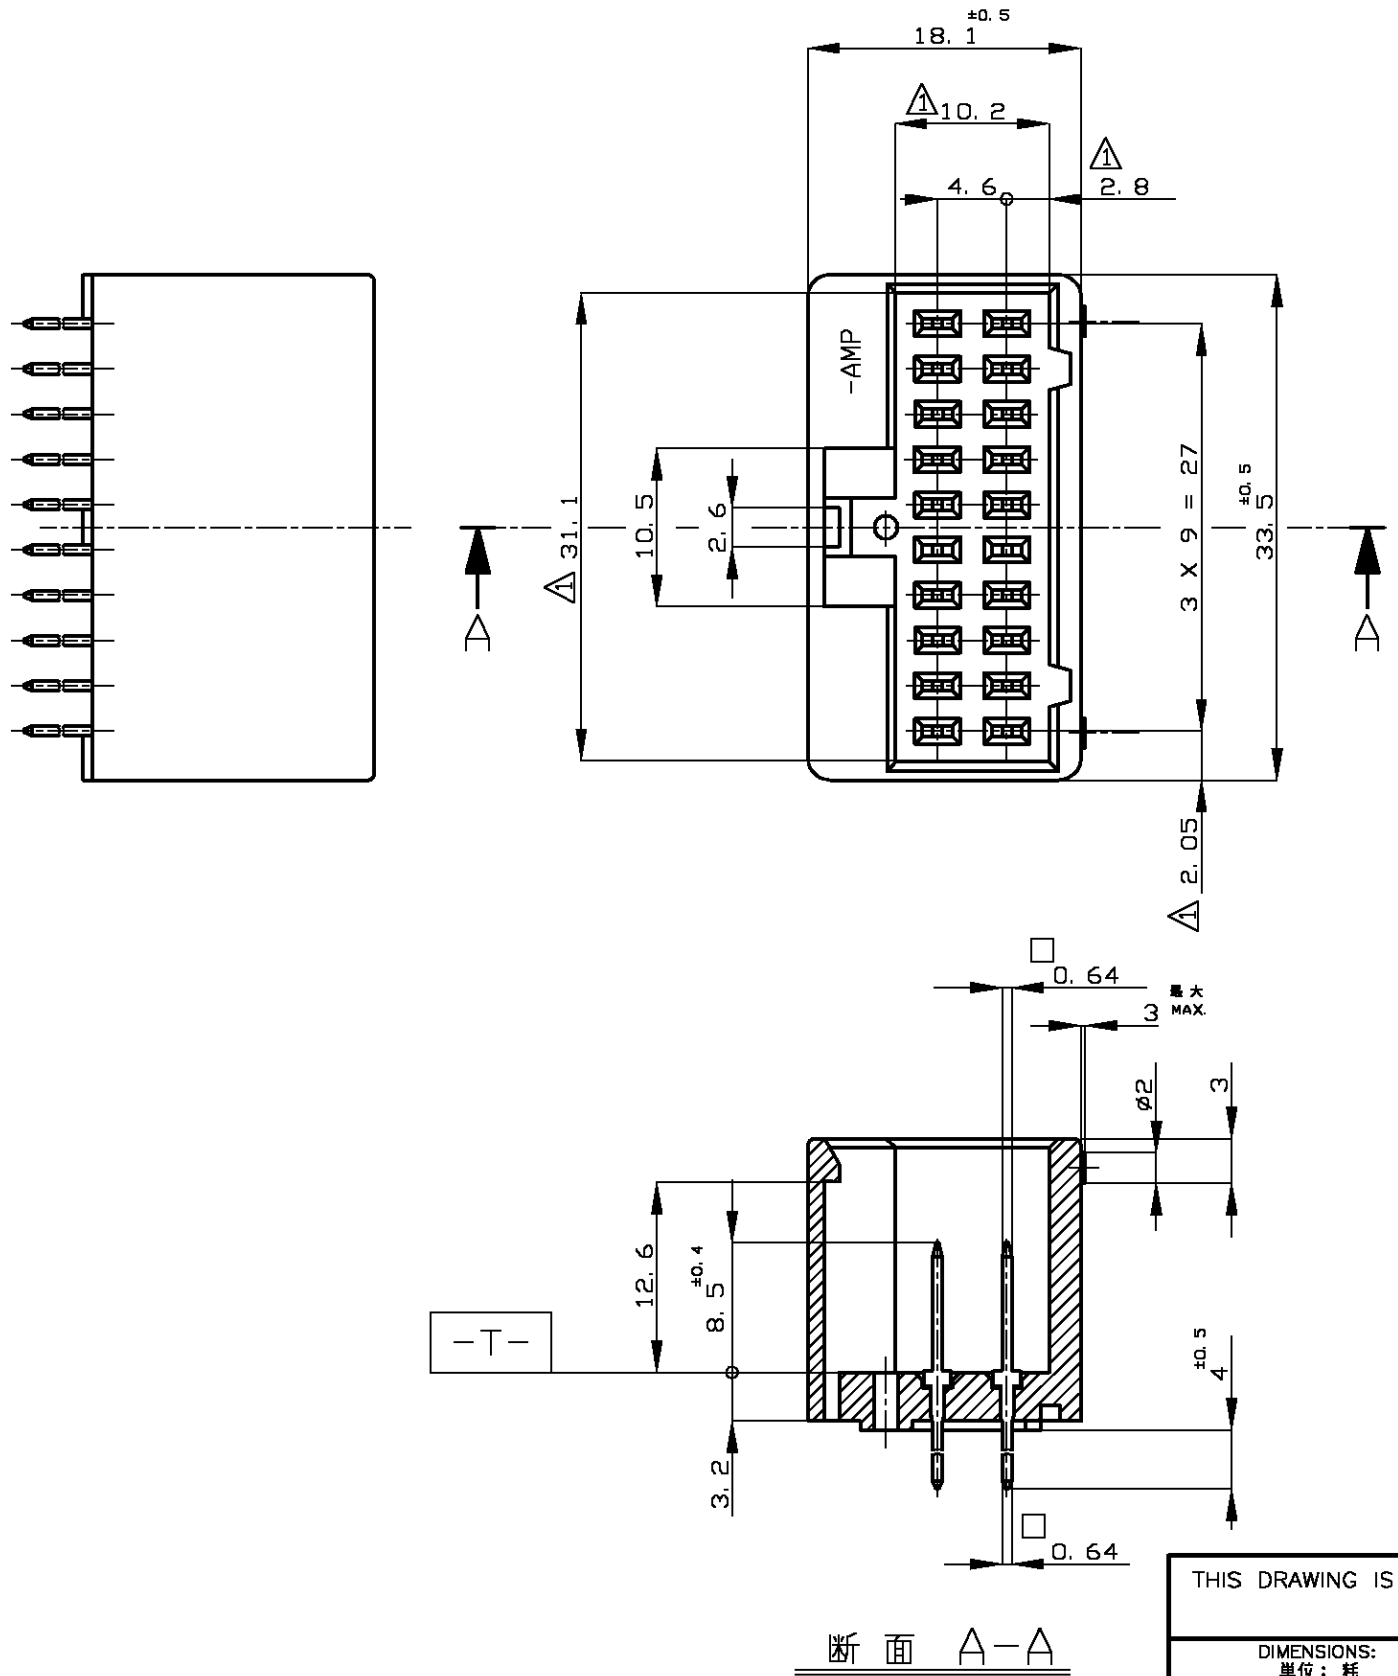


断 面 A-A

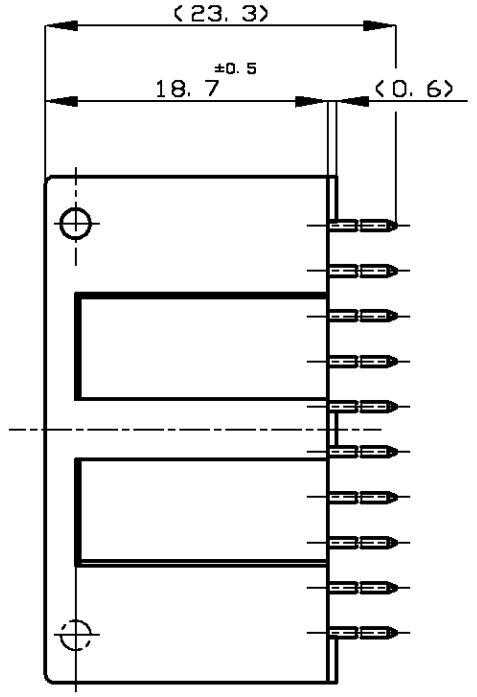


プリント基板取付穴寸法 公差 ± 0.1
(MOUNTING DIMENSIONS FOR P.C.B.) TOLERANCES ±0.1)

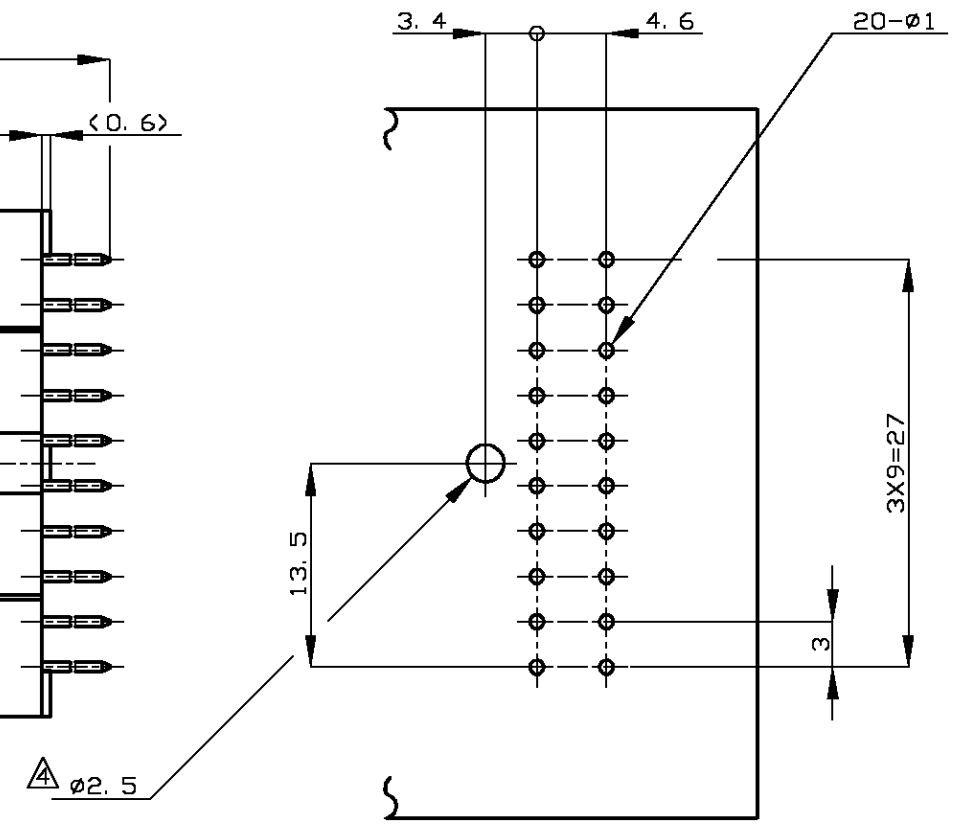


1. -T- 面より2mmの範囲で測定
2. 勘合する相手ハウジングは型番 172047, 172850
3. 適用製品規格 NO. 108-5124
4. 推奨取付ねじ ; JIS B1115, B1122 タッピンねじ なべ3種 呼び径2, 長さ5

1. THESE DIMENSIONS TO BE MEASURED BETWEEN -T- AND 2.0
2. MATABLE PLUG HOUSING ; 172047, 172850.
3. PRODUCT SPECIFICATION ; 108-5124.
4. RECOMMENDED MOUNTING SCREW ; JIS B1115 OR B1122 PAN HEAD TAPPING SCREW, CLASS 3, DIAMETER 2, LENGTH 5.

| SELECTIVE-TIN | PRE-TIN | BLACK | 172257-2 |
|---|---|---|---|
| SELECTIVE-TIN (MATTE) | SELECTIVE-TIN (BRIGHT) | BLACK | 172257-1 |
| SOLDERING SIDE 半田付け部 | CONATCT SIDE 接触部側 | COLOR 色 | PART NUMBER 製品型番 |
| CONTACT FINISH コンタクト仕上 | | | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位： 耗 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

| | |
|---|---|
| 0 PLC | ± – |
| 1 PLC | ± – |
| 2 PLC | ± – |
| 3 PLC | ± – |
| 4 PLC | ± – |
| ANGLES | ± – |

一般公差 (GENERAL TOLERANCE)
10以下 ; ±0.2
10を超え 30以下 ; ±0.25
30を超え 100以下 ; ±0.3
角 度 ; ±3°

MATERIAL 材料
CONTACT ; COPPER ALLOY
HOUSING ; 66NYLON

FINISH 仕上
SEE TABLE

| | | |
|---|---|---|
| DWN | T.SHINOHARA | 10FEB06 |
| CHK | K.BETSUI | 10FEB06 |
| APVD | K.BETSUI | 10FEB06 |
| PRODUCT SPEC 製品規格 | | |
| APPLICATION SPEC 取付適用規格 | | |
| WEIGHT | | |

CUSTOMER DRAWING

Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME 名称
20POSITION VERTICAL TYPE CAP HOUSING ASSEMBLY
DUALLINE INTERLOCK CONNECTOR

| SIZE | CAGE CODE | DRAWING NO 番号 | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-172257 | — |

| SCALE 尺度 | SHEET | REV |
|---|---|---|
| 2:1 | 1 OF 1 | D1 |