

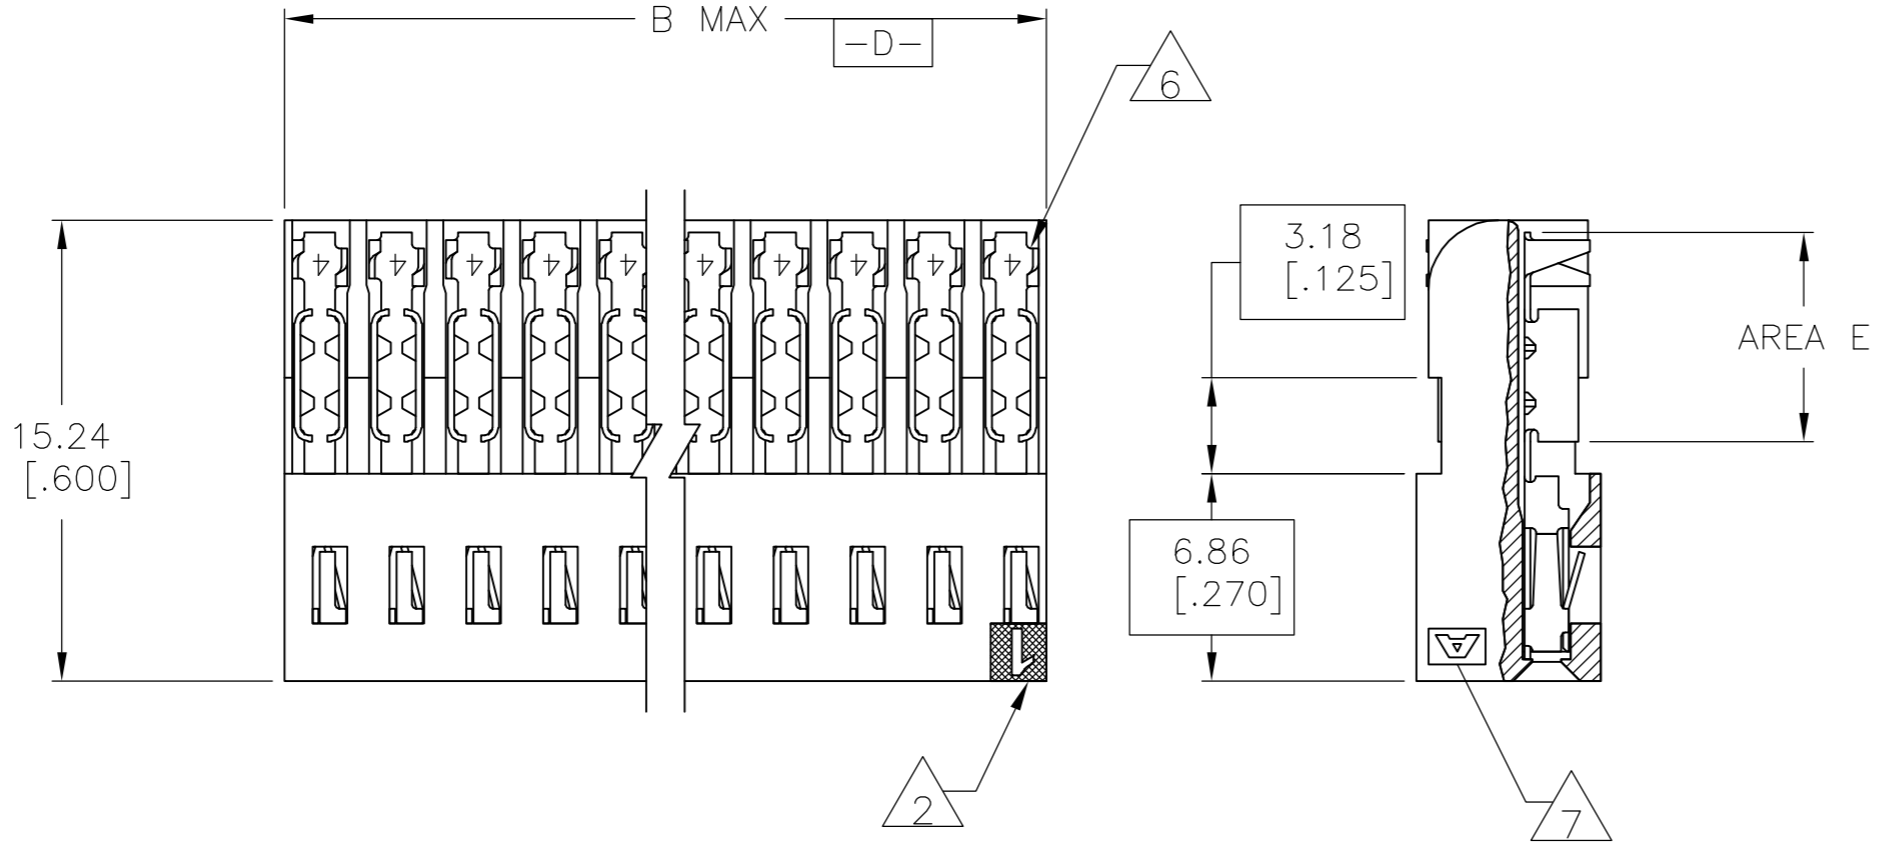


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		R		EC OG3C 0650 04	11MAR05	BSV	DFR

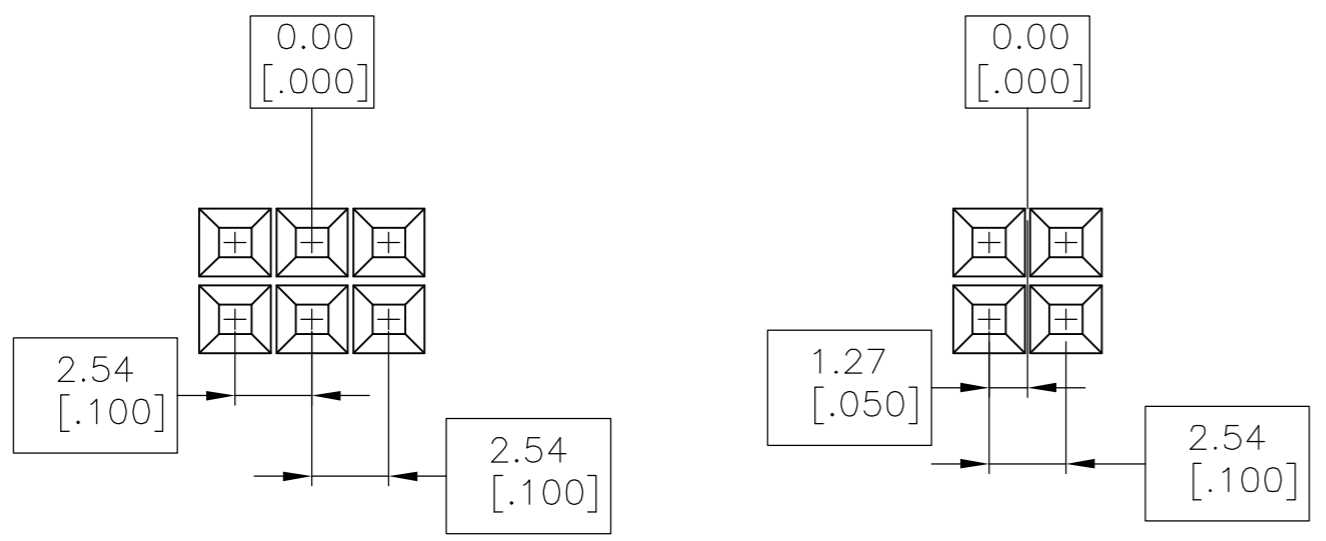

- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 FINISH: 0.00076[.000030] GOLD IN CONTACT AREA, 0.00127[.000050]-0.00254[.000100] TIN-LEAD IN AREA E, ALL OVER 0.00076[.000030] NICKEL.
- 5. USE WITH 26-30 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "4" LOCATED IN THIS AREA.
- 7 AMP TRADEMARK (EITHER SIDE).
- 8 FINISH: 0.00076[.000030] GOLD IN CONTACT AREA, 0.00127[.000050]-0.00254[.000100] TIN IN AREA E, ALL OVER 0.00076[.000030] NICKEL.
- 9 ROHS 2002/95/EC COMPLIANT

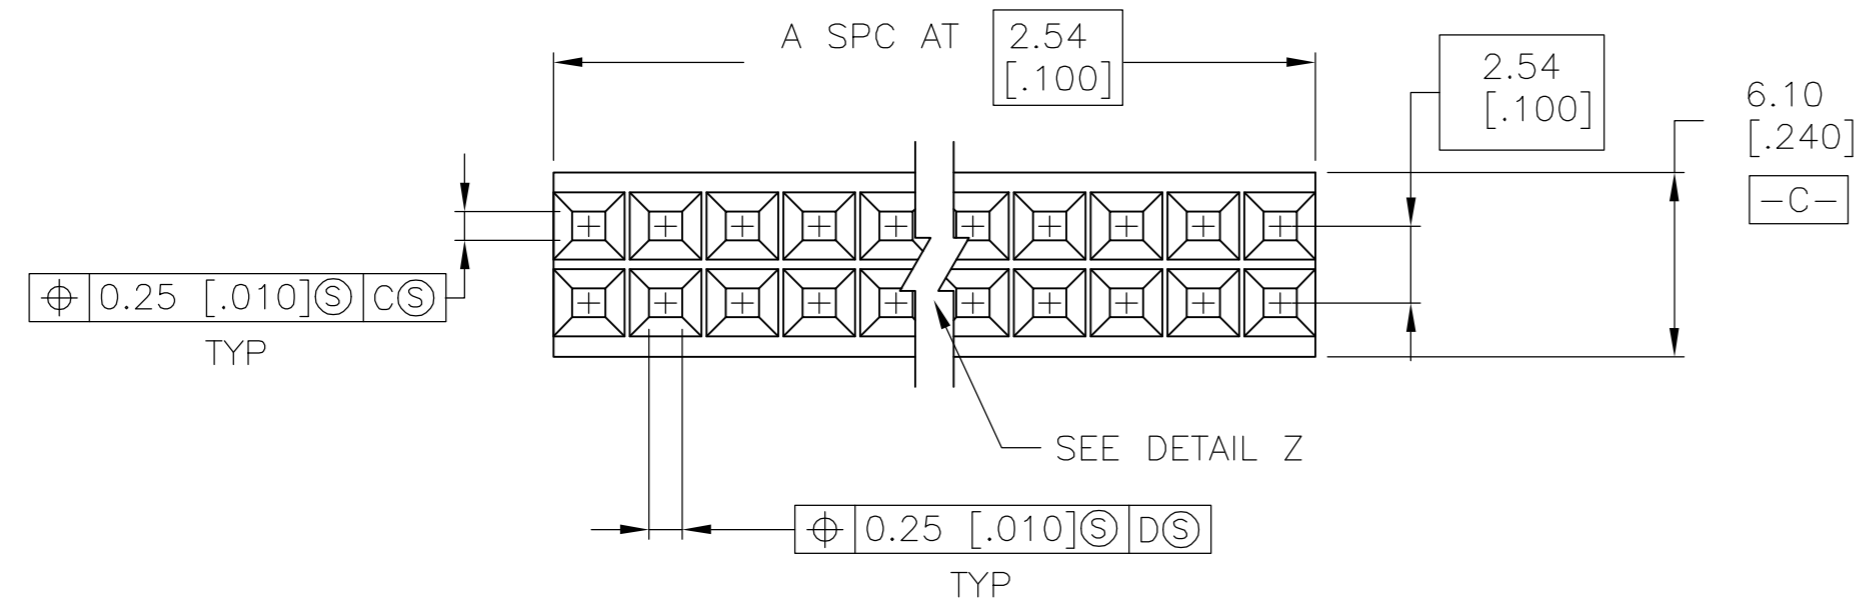

8	9	68.58 [2.700]	26	54	5-102693-9
8	9	25.40 [1.000]	9	20	5-102693-8
8	9	22.86 [.900]	8	18	5-102693-7
8	9	20.32 [.800]	7	16	5-102693-6
8	9	17.78 [.700]	6	14	5-102693-5
8	9	15.24 [.600]	5	12	5-102693-4
8	9	12.70 [.500]	4	10	5-102693-3
8	9	10.16 [.400]	3	8	5-102693-2
8	9	7.62 [.300]	2	6	5-102693-1
3		68.58 [2.700]	26	54	102693-9
3		25.40 [1.000]	9	20	102693-8
3		22.86 [.900]	8	18	102693-7
3		20.32 [.800]	7	16	102693-6
3		17.78 [.700]	6	14	102693-5
3		15.24 [.600]	5	12	102693-4
3		12.70 [.500]	4	10	102693-3
3		10.16 [.400]	3	8	102693-2
3		7.62 [.300]	2	6	102693-1
		B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S.SHUEY	13DEC91	Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS: mm [INCHES]		CHK	M. RIDER	6JAN92				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R.FELIX	7JAN92				
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH SEE TABLE		PRODUCT SPEC	NAME			RCPT ASSY, DOUBLE ROW, .100 C/L, #26-30 AWG WIRE, HIGH PRESS, MT		
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK CONTACTS: PHOS BRONZE		APPLICATION SPEC	WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			-		A2	00779	C=102693	-
		CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 1	REV
								R