


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	00	M		EC OG3C 0759 04	28JAN05	BSV

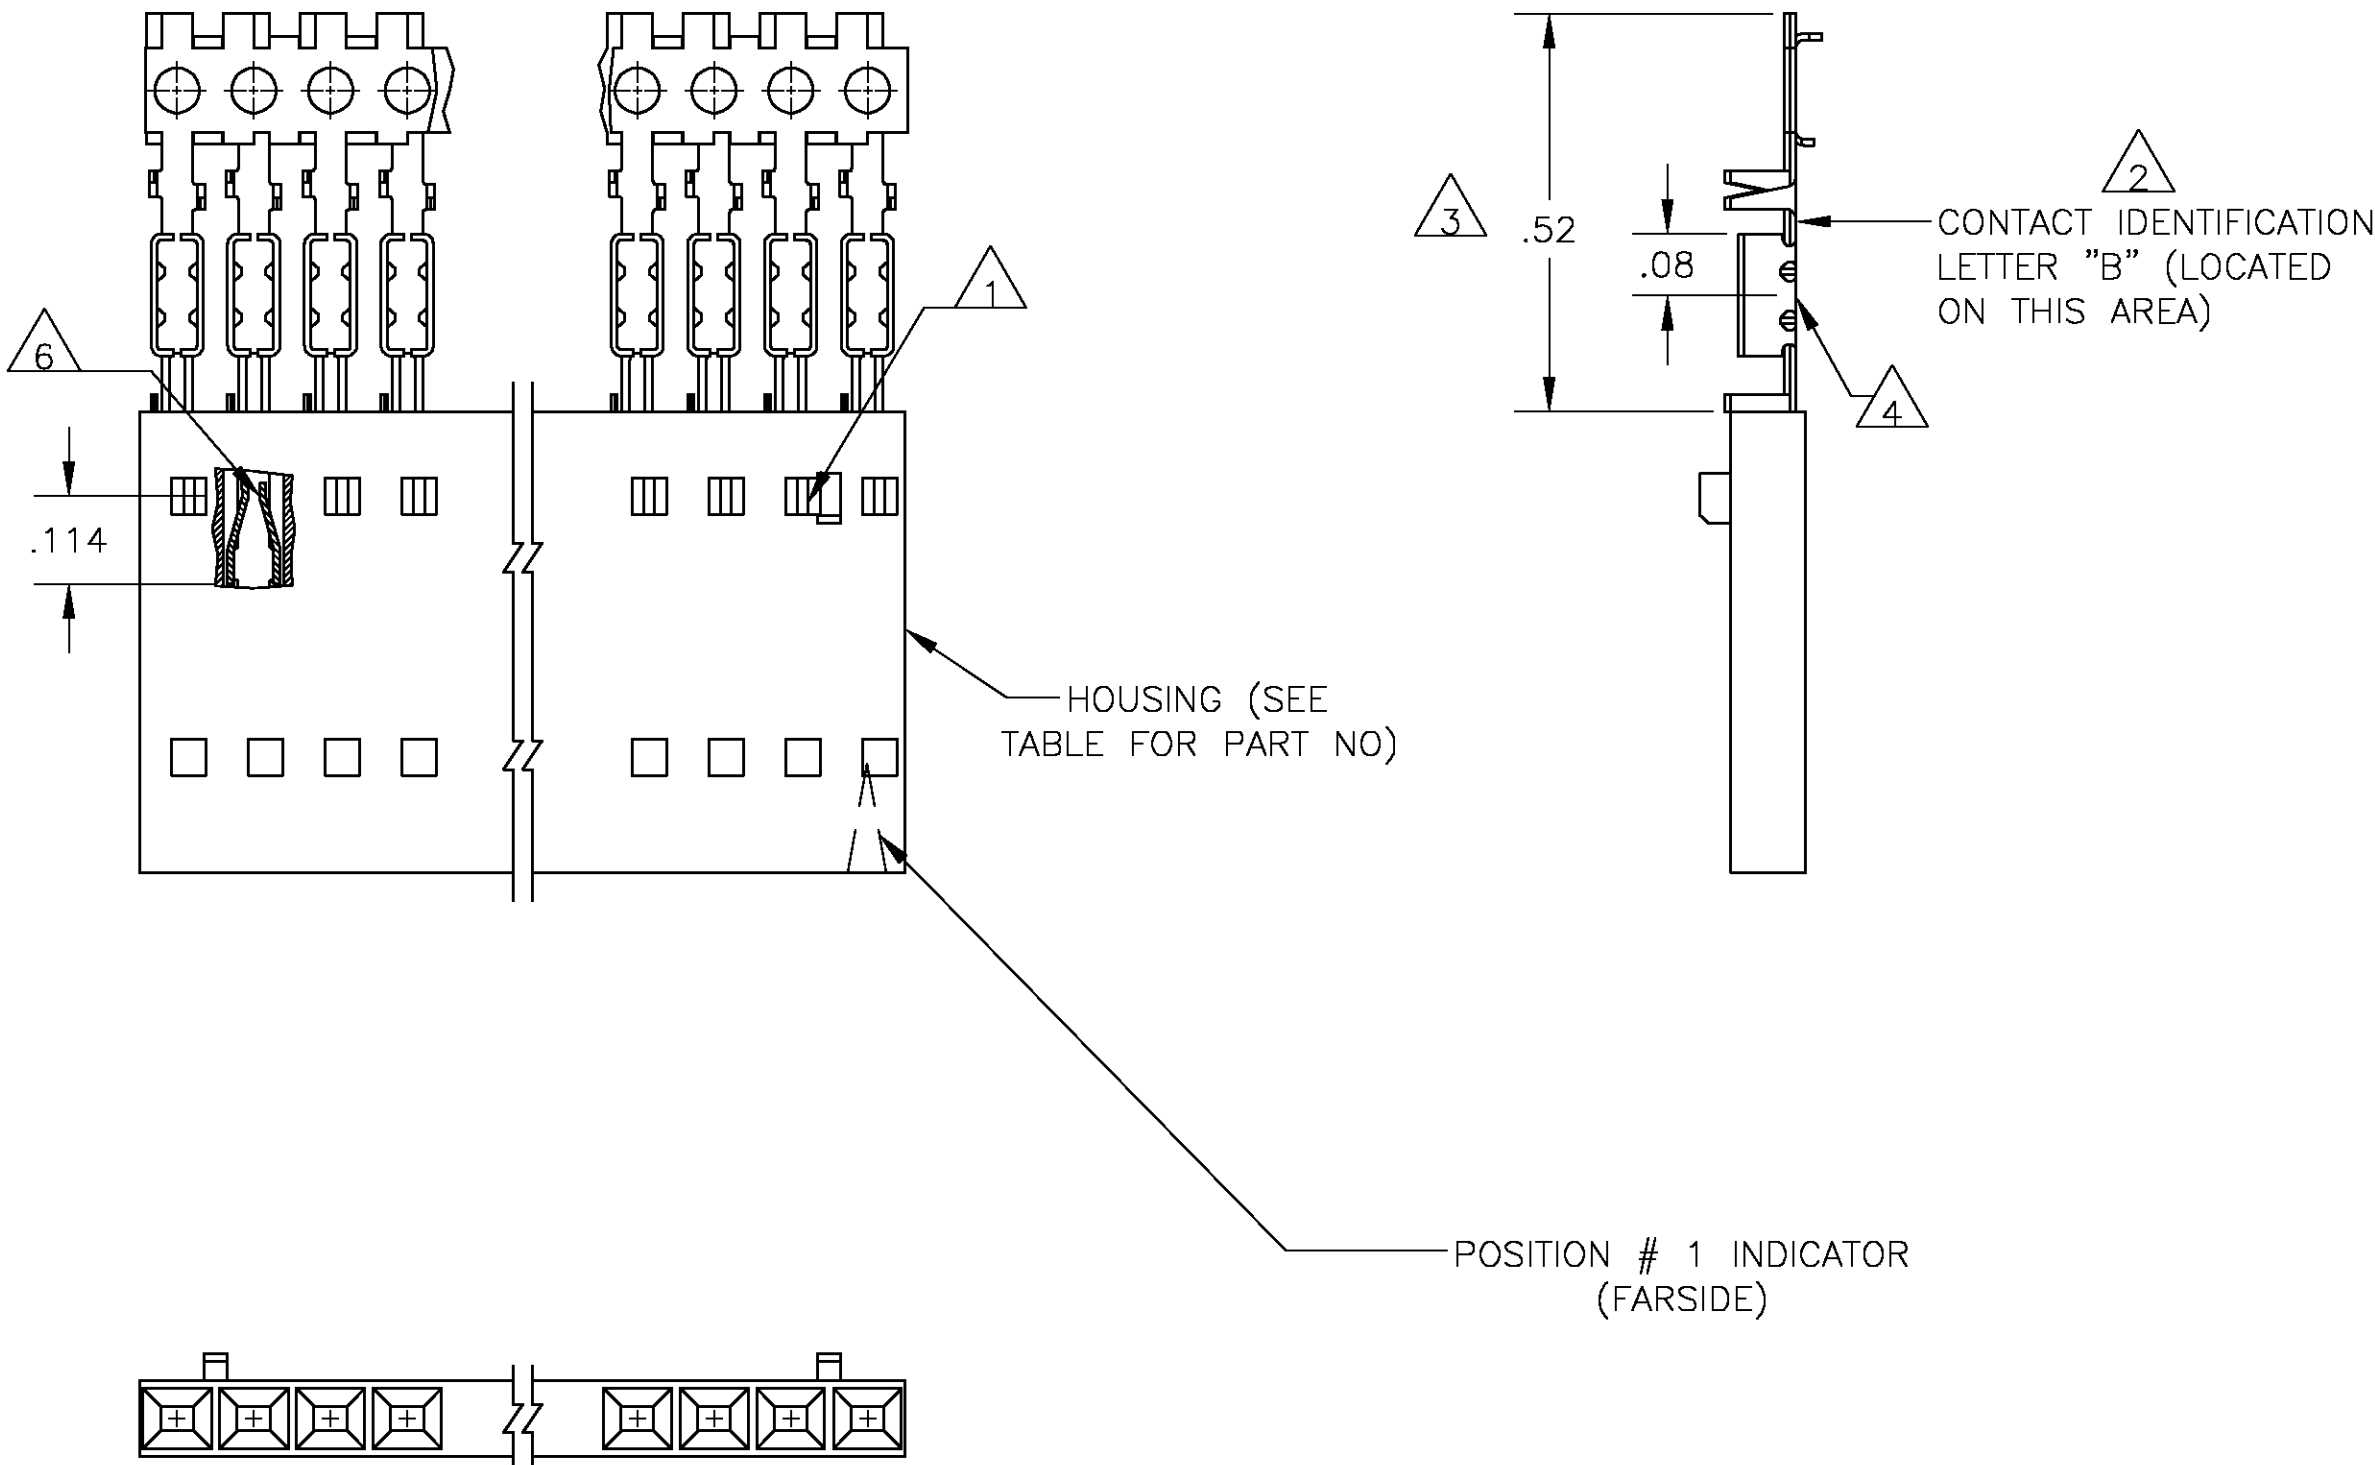

8	2-103648-4	25	7-103651-4
8	2-103648-3	24	7-103651-3
8	2-103648-2	23	7-103651-2
8	2-103648-1	22	7-103651-1
8	2-103648-0	21	7-103651-0
8	1-103648-9	20	6-103651-9
8	1-103648-8	19	6-103651-8
8	1-103648-7	18	6-103651-7
8	1-103648-6	17	6-103651-6
8	1-103648-5	16	6-103651-5
8	1-103648-4	15	6-103651-4
8	1-103648-3	14	6-103651-3
8	1-103648-2	13	6-103651-2
7	2-103648-4	25	2-103651-4
7	2-103648-3	24	2-103651-3
7	2-103648-2	23	2-103651-2
7	2-103648-1	22	2-103651-1
7	2-103648-0	21	2-103651-0
7	1-103648-9	20	1-103651-9
7	1-103648-8	19	1-103651-8
7	1-103648-7	18	1-103651-7
7	1-103648-6	17	1-103651-6
7	1-103648-5	16	1-103651-5
7	1-103648-4	15	1-103651-4
7	1-103648-3	14	1-103651-3
7	1-103648-2	13	1-103651-2

SUPERSEDED BY 1-103969-1	1-103648-1	12	1-103651-1
SUPERSEDED BY 1-103969-0	1-103648-0	11	1-103651-0
SUPERSEDED BY 103969-9	103648-9	10	103651-9
SUPERSEDED BY 103969-8	103648-8	9	103651-8
SUPERSEDED BY 103969-7	103648-7	8	103651-7
SUPERSEDED BY 103969-6	103648-6	7	103651-6
SUPERSEDED BY 103969-5	103648-5	6	103651-5
SUPERSEDED BY 103969-4	103648-4	5	103651-4
SUPERSEDED BY 103969-3	103648-3	4	103651-3
SUPERSEDED BY 103969-2	103648-2	3	103651-2
SUPERSEDED BY 103969-1	103648-1	2	103651-1

- 1
- CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2
- USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3
- THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4
- POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5
- FOR STRIP ASSEMBLIES SEE PART NUMBER 103969
- 6
- POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7
- .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8
- .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
L. MAYER
05 NOV 1986

CHK
P. DEJONG
12-11-86

APVD
12-11-86

PRODUCT SPEC
108-25034

APPLICATION SPEC
114-25026

WEIGHT
-

MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK
CONTACTS- PHOS BRONZE

FINISH
SEE TABLE

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=103651

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
4:1

SHEET
1 OF 1

REV
M