

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION







20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
CE		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					C1	ADD -21/22/23/24	26MAR2009	JZ	RZ
					C2	ADD -25	07APR09	JZ	RZ

PERFORMANCE REQUIREMENTS:
OPERATING WAVELENGTH: 1260-1360 & 1430-1625nm
REFLECTANCE: AVG. -55dB
OPERATING TEMPERATURE: -40°C TO +85°C
ATTENUATION TOLERANCE, AMBIENT:
FOR 0 dB ATTENUATORS: +0.5dB MAX
FOR ATTENUATORS < 5dB: ±0.5dB
FOR ATTENUATORS ≥ 5dB: ±10% OF NOMINAL ATTENUATION VALUE
MEASURED WITH REFERENCE QUALITY LAUNCH LEADS:
- REFLECTANCE: ≤ -60dB
- FIBER CORE ECCENTRICITY < 0.3

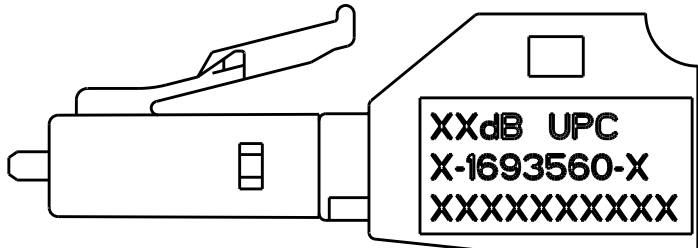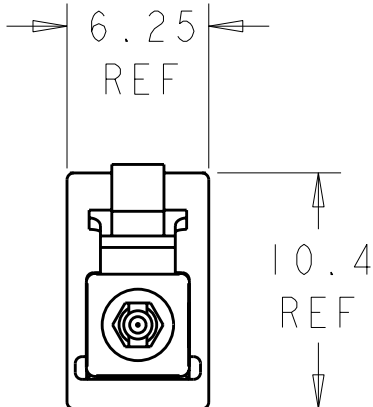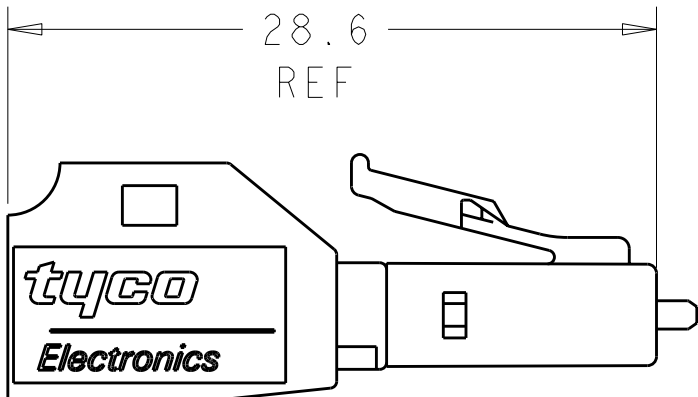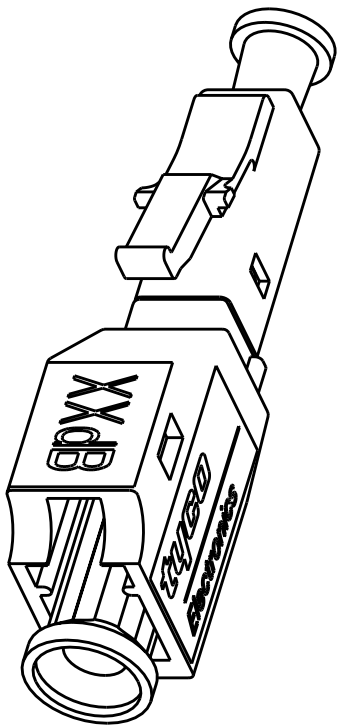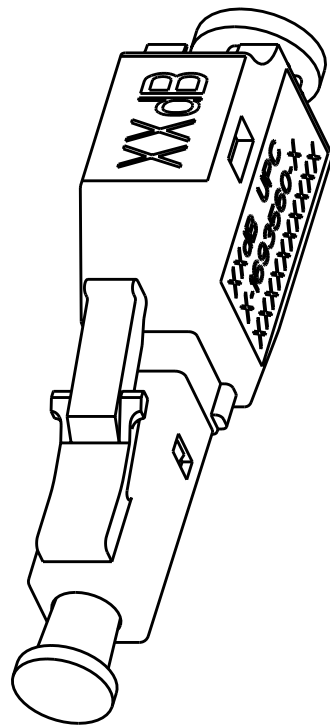

25	2-1693560-5
24	2-1693560-4
23	2-1693560-3
22	2-1693560-2
21	2-1693560-1
20	2-1693560-0
19	1-1693560-9
18	1-1693560-8
17	1-1693560-7
16	1-1693560-6
15	1-1693560-5
14	1-1693560-4
13	1-1693560-3
12	1-1693560-2
11	1-1693560-1
10	1-1693560-0
9	1693560-9
8	1693560-8
7	1693560-7
6	1693560-6
5	1693560-5
4	1693560-4
3	1693560-3
2	1693560-2
1	1693560-1
0	9-1693560-9
NOMINAL ATTENUATION VALUE (dB)	
PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN E. MCCORMICK 01NOV2006 CHK E. HOPKINS 01NOV2006 APVD S. BUCHTER 01NOV2006				Tyco Electronics Corporation Shanghai, China					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-2221		NAME ATTENUATOR, OPTICAL, BUILD OUT, SM, LC/UPC, BROADBAND, BANDPASS							
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		APPLICATION SPEC 114-1129		SIZE A2		CAGE CODE 00779		DRAWING NO C-1693560		RESTRICTED TO -	
MATERIAL -		FINISH -		WEIGHT -		SCALE 3:1		SHEET 1		OF 1		REV C1	