


REV	DATE	ECO#
A	6/02/04	26659

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

CAD# = 2DC302K2

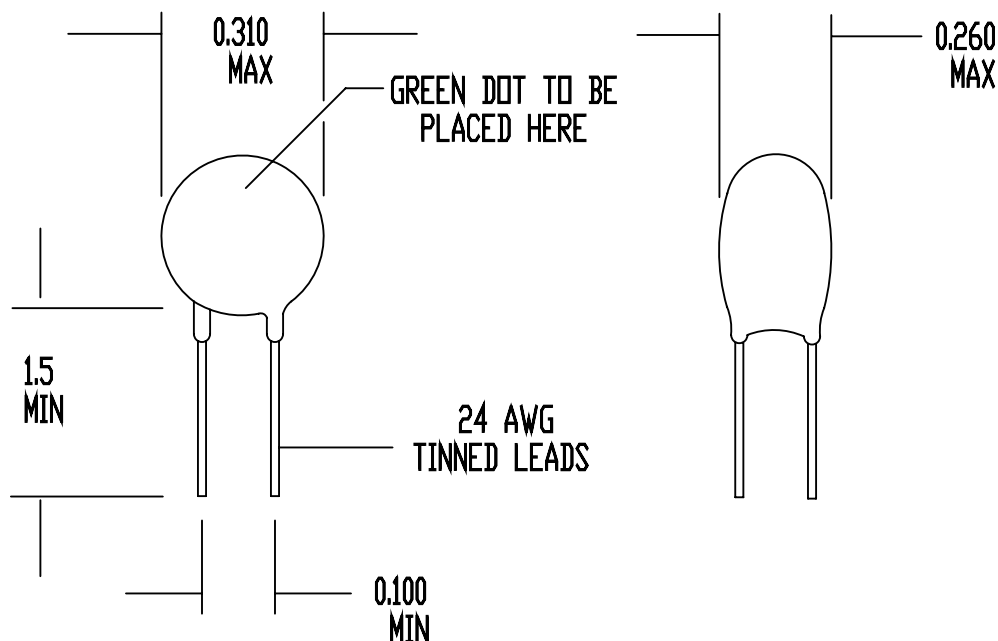

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 3K OHMS +/- 10 %
TEMPERATURE COEFFICIENT = -4.4%/DEG C (CURVE C)
BETA (25 DEG C/75 DEG C) = 3965 DEG K NOMINAL AT 25 DEG C
DISSIPATION CONSTANT = 7mW/DEG C NOMINAL
TIME CONSTANT = 30 SECONDS NOMINAL (IN STILL AIR)
OPERATING TEMPERATURE RANGE = -60 DEG C TO +150 DEG C
LEADS = RTI P/N STL-209-05

DRAWN BY S. TAPIA		AMETHERM Circuit Protection Thermistors
DATE 6/02/04	ORIG. CUSTOMER	
REV A	APPR	NTC THERMISTOR
SHEET 1 OF 1		
		2DC302K-C002