

LazrSPEED® Indoor/Outdoor Plenum Distribution Cable, 4 fiber single-unit


Product Classification

Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America

Standards And Qualifications

Cable Qualification Standards	ANSI/ICEA S-104-696   Telcordia GR-20 (water penetration)   Telcordia GR-409
-------------------------------	--

Representative Image

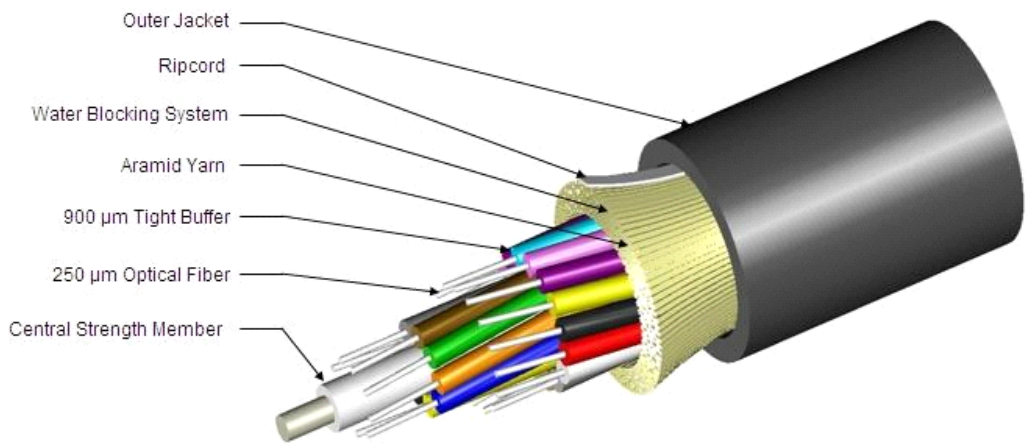

General Specifications

Construction Type	Non-armored
Cable Type	Distribution

Construction Materials

Fiber Type Solution	OM3, LazrSPEED® 300
Total Fiber Count	4
Fiber Type	OM3, LazrSPEED® 300

<b>Fiber Type, quantity</b>	4
<b>Jacket Color</b>	Black
<b>Jacket UV Resistance</b>	UV stabilized

## Dimensions

<b>Cable Weight</b>	15.5 lb/kft   23.0 kg/km
<b>Diameter Over Jacket</b>	4.80 mm   0.19 in

## Physical Specifications

<b>Minimum Bend Radius, loaded</b>	7.1 cm   2.8 in
<b>Minimum Bend Radius, unloaded</b>	4.8 cm   1.9 in
<b>Tensile Load, long term, maximum</b>	90 lbf   400 N
<b>Tensile Load, short term, maximum</b>	300 lbf   1335 N
<b>Vertical Rise, maximum</b>	500.0 m   1640.4 ft

## Flame Test Specifications

<b>Flame Test Listing</b>	NEC OFNP (ETL) and c(ETL)
<b>Flame Test Method</b>	NFPA 262

## Environmental Specifications

<b>Environmental Space</b>	Plenum
<b>Installation Temperature</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Operating Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)

## Mechanical Test Specifications

<b>Compression</b>	126 lb/in   22 N/mm
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	100 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	4.34 ft lb   5.88 N-m
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Water Penetration</b>	24 h
<b>Water Penetration Test Method</b>	FOTP-82   IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze Test Method	IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5L-TB (Product Component—not orderable) — LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable