

FEATURES AND OPTIONS

- Available in 9, 15, 25 and 37 positions
- Male and female versions
- Available with hardware options such as threaded inserts, hex stand-offs, board locks and grounding straps
- Gold plated contacts
- Tin plated shell

SPECIFICATIONS

MATERIALS


Shell: Tin plated steel
 Insulator: PBT thermo plastic, black color, 30% glass filled self-extinguishing, UL94V-0 rated
 Contact material: Pin: Brass
 Socket: Phosphor Bronze
 Contact plating: Gold over nickel

ELECTRICAL


Current rating: 5.0 Amps
 Dielectric strength: 1000Vac min.
 Insulation resistance: 5000M ohm min.
 Operating temperature range: -55°C~ to +125°C

HOW TO ORDER

ADXXXA-KG-TXXX3



- B = Boardlocks
- G = Groundstraps
- X = Neither
- S = Hex stand-offs
- X = Without
- A = Threaded inserts
- X = Without
- XX = Number of contacts
- S = Male connector
- F = Female connector

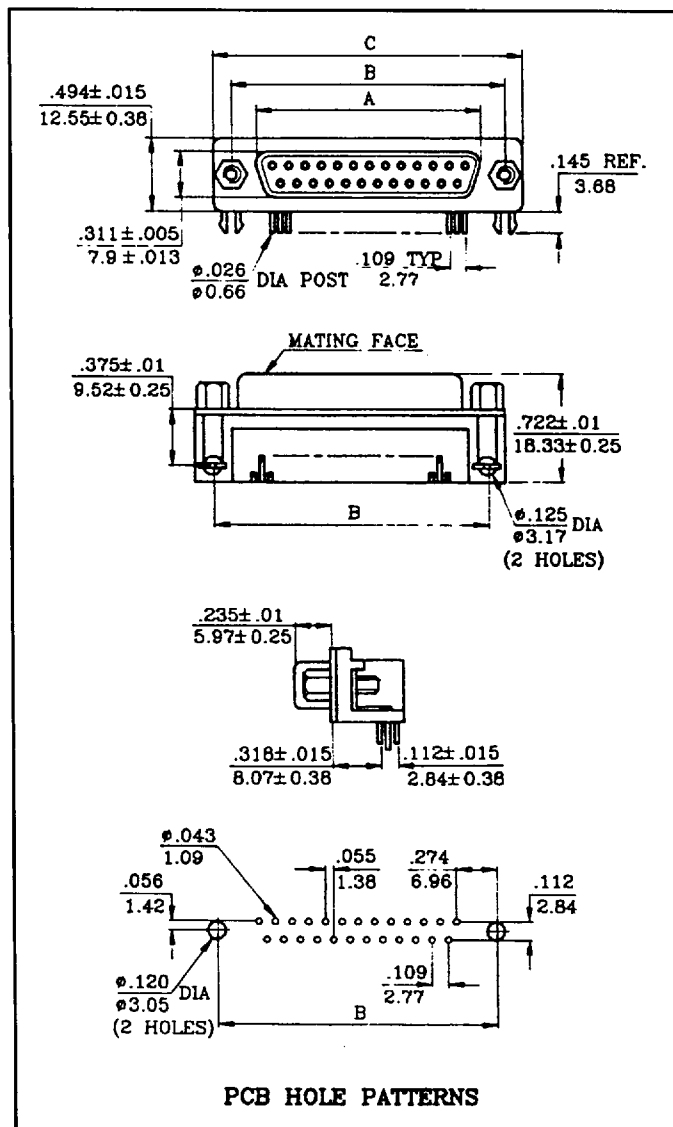

DIMENSIONS

# of pins	A	B	C
9	16.33 0.643	24.99 0.984	30.81 1.213
15	24.66 0.971	33.32 1.312	39.14 1.541
25	38.38 1.511	47.04 1.852	53.04 2.088
37	54.84 2.159	63.50 2.500	69.32 2.729