

Data Sheet

Total Power: 10 W
Input Voltage: 24 or 48 V
of Outputs: Single and Dual

SPECIAL FEATURES

- Package size 1.0" x 1.0" x 0.4"
- Ultra-wide 4:1 input range:
9 - 36 V_{in}, 18 - 75 V_{in}
- Very high efficiency up to 87%
- Operating temperature range:
-40 °C to +85 °C
- I/O isolation voltage 1500 VDC
- Remote ON/OFF control
- Metal case with isolated baseplate
- CSA/UL/IEC/EN 60950-1
Safety Approval

SAFETY

- cUL/UL 60950-1
- IEC/EN 60950-1



Electrical Specifications

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	87% @ 12 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	±0.3%
Load regulation	±0.5%
Noise/ripple	100 mV
Overload protection	150% typ of I _o max, hiccup
Short circuit protection	Hiccup mode
Switching frequency	450 kHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	1500 pF


Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	350 Khrs calculated

Ordering Information


Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Max Output Cap	Power
AXA02F18-L	9 - 36 Vdc	3.3 V	2.2 A	86%	560 μ F	7.2 W
AXA02A18-L	9 - 36 Vdc	5 V	2 A	84%	560 μ F	10 W
AXA00B18-L	9 - 36 Vdc	12 V	0.83 A	86%	150 μ F	10 W
AXA00C18-L	9 - 36 Vdc	15 V	0.66 A	87%	150 μ F	10 W
AXA000H18-L	9 - 36 Vdc	24 V	0.41 A	86%	68 μ F	10 W
AXA00AA18-L	9 - 36 Vdc	\pm 5 V	\pm 1 A	84%	220 μ F	10 W
AXA000BB18-L	9 - 36 Vdc	\pm 12 V	\pm 0.41 A	86%	100 μ F	10 W
AXA000CC18-L	9 - 36 Vdc	\pm 15 V	\pm 0.33 A	87%	100 μ F	10 W
AXA02F36-L	18 - 75 Vdc	3.3 V	2.2 A	85%	560 μ F	7.2 W
AXA02A36-L	18 - 75 Vdc	5 V	2 A	84%	560 μ F	10 W
AXA00B36-L	18 - 75 Vdc	12 V	0.83 A	86%	150 μ F	10 W
AXA00C36-L	18 - 75 Vdc	15 V	0.66 A	87%	150 μ F	10 W
AXA000H36-L	18 - 75 Vdc	24 V	0.41 A	86%	68 μ F	10 W
AXA00AA36-L	18 - 75 Vdc	\pm 5 V	\pm 1 A	84%	220 μ F	10 W
AXA000BB36-L	18 - 75 Vdc	\pm 12 V	\pm 0.41 A	86%	100 μ F	10 W
AXA000CC36-L	18 - 75 Vdc	\pm 15 V	\pm 0.33 A	87%	100 μ F	10 W

Mechanical Dimensions

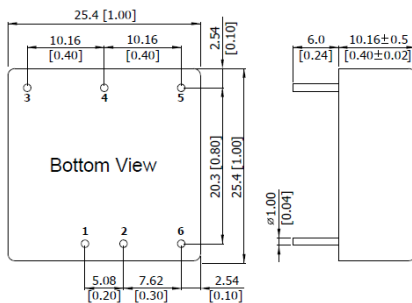

- All dimensions in mm (inches)
- Tolerance: X.X \pm 0.25 (X.XX \pm 0.01)
X.XX \pm 0.13 (X.XXX \pm 0.005)
- Pin diameter \varnothing 1.0 \pm 0.05 (0.04 \pm 0.002)

Heatsink (Option -HS)



Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No pin	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com