

ERM75 Series

75 Watts

Quarter-Brick DC-DC

Total Power: 75 Watts
Input Voltage: 72 or 110 Vdc
of Outputs: Single

Special Features

- Small 57.9 x 36.8 x12.7 mm package
- Input Ranges 43-101 Vdc or 66-160 Vdc
- High Efficiency up to 92%
- No Minimum Load Requirement
- Operating Temp. Range -40 °C to +85 °C with derating
- Reinforced Insulation 3000 VACrms
- Under-Voltage Shutdown
- Remote On/Off
- Metal Case with Isolated Baseplate
- EN60950-1 Safety Standard
- EN50155(IEC60571)/EN50121-3-2 and EN45545-2
- Railway Standard
- EN45545-2 Flammability
- 3 Year Warranty

Safety

cUL/UL 60950-1
IEC/EN 60950-1
IEC/EN 50155



Product Descriptions

ERM75 series is a new generation of high performance, isolated dc-dc converter modules. The product offers 75W in a small, fully encapsulated package. The input voltage ranges comply with European railway standard EN50155. Reinforced insulation and high EMC immunity qualifies these converters also for many demanding applications in railway and other transportation systems.

Advanced circuit topology provides a very high efficiency up to 92% which allows ambient temperatures range up to +85 °C with derating.

Further features include remote On/Off, under-voltage shutdown as well as overload and over-temperature protection.

Model Numbers

Model	Input Voltage Range	Output Voltage	Minimum Load	Maximum Load
ERM15A72	72 (43 - 101) Vdc	5 Vdc	0A	15A
ERM06B72	72 (43 - 101) Vdc	12 Vdc	0A	6.25A
ERM05C72	72 (43 - 101) Vdc	15 Vdc	0A	5A
ERM03H72	72 (43 - 101) Vdc	24 Vdc	0A	3.125A
ERM15A110	110 (66 - 160) Vdc	5 Vdc	0A	15A
ERM06B110	110 (66 - 160) Vdc	12 Vdc	0A	6.25A
ERM05C110	110 (66 - 160) Vdc	15 Vdc	0A	5A
ERM03H110	110 (66 - 160) Vdc	24 Vdc	0A	3.125A

Note - All DC/DC converters should be externally fused at the front end for protection.

Options

Heatsink (-HS)

Electrical Specifications

Absolute Maximum Ratings

Stress in excess of those listed in the "Absolute Maximum Ratings" may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply's reliability.

Table 1. Absolute Maximum Ratings:

Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Voltage: (DC continuous operation)	ERM15A72	$V_{IN,DC}$	43	-	101	Vdc
	ERM06B72		43	-	101	
	ERM05C72		43	-	101	
	ERM03H72		43	-	101	
	ERM15A110		66	-	160	
	ERM06B110		66	-	160	
	ERM05C110		66	-	160	
	ERM03H110		66	-	160	
Maximum Output Power	All models	$P_{O,max}$	-	-	75	W
Isolation Resistance 500Vdc	All models		1000	-	-	Mohm
I/O Isolation Capacitance 100KHz, 1V	All models		-	-	3000	pF
Isolation Voltage	Input to output Input to case Output to case	All models	3000	-	-	Vacrms Vdc Vdc
			1500	-	-	
			1500	-	-	
Operating Ambient Temperature (With derating, refer to derating curve)	ERM06B72 ERM05C72 ERM03H72 ERM06B110 ERM05C110 ERM03H110 ERM15A72 ERM15A110	T_A	-40	-	+85	°C
Operating Base-plate Temperature Range	All models		-40	-	+105	°C
Storage Temperature	All models	T_{STG}	-50	-	+125	°C
Fire protection test			Compliance to EN45545-2			
Humidity (non-condensing)	All models		5	-	95	%

Input Specifications

Table 2. Input Specifications:

Parameter		Condition	Symbol	Min	Nom	Max	Unit
Operating Input Voltage, DC	ERM15A72	All	$V_{IN,DC}$	43	72	101	Vdc
	ERM06B72			43	72	101	
	ERM05C72			43	72	101	
	ERM03H72			43	72	101	
	ERM15A110			66	110	160	
	ERM06B110			66	110	160	
	ERM05C110			66	110	160	
	ERM03H110			66	110	160	
Start-up Threshold Voltage	ERM10A72	All	$V_{IN,ON}$	-	-	43	Vdc
	ERM04B72			-	-	43	
	ERM03C72			-	-	43	
	ERM02H72			-	-	43	
	ERM10A110			-	-	66	
	ERM04B110			-	-	66	
	ERM03C110			-	-	66	
	ERM02H110			-	-	66	
Under Voltage Lockout	ERM15A72	All	$V_{IN,OFF}$	-	40	-	Vdc
	ERM06B72			-	40	-	
	ERM05C72			-	40	-	
	ERM03H72			-	40	-	
	ERM15A110			-	63	-	
	ERM06B110			-	63	-	
	ERM05C110			-	63	-	
	ERM03H110			-	63	-	
Input Surge Voltage	ERM15A72	100ms. Max (with 220uF/200V capacitor)	$I_{IN,surge}$	-0.7	-	165	Vdc
	ERM06B72			-0.7	-	165	
	ERM05C72			-0.7	-	165	
	ERM03H72			-0.7	-	165	
	ERM15A110			-0.7	-	250	
	ERM06B110			-0.7	-	250	
	ERM05C110			-0.7	-	250	
	ERM03H110			-0.7	-	250	
Maximum Input Current	ERM15A72	Maximum value at Vin= Vin nom; Full Load	$I_{IN,max}$	-	1.17	-	A
	ERM06B72			-	1.132	-	
	ERM05C72			-	1.132	-	
	ERM03H72			-	1.145	-	
	ERM15A110			-	0.766	-	
	ERM06B110			-	0.749	-	
	ERM05C110			-	0.749	-	
	ERM03H110			-	0.758	-	

Input Specifications

Table 2. Input Specifications con't:

Parameter	Condition	Symbol	Min	Nom	Max	Unit		
No Load Input Current	Typical value at Vin = Vin nom; No Load	I_{IN,no_load}	-	50	-	mA		
			-	45	-			
			-	45	-			
			-	50	-			
			-	40	-			
			-	35	-			
			-	35	-			
			-	40	-			
Efficiency @Max. Load	Vin =Vin nom; Full Load; $T_A = 25^\circ C$	η	-	90	-	%		
			-	92	-			
			-	92	-			
			-	91	-			
			-	90	-			
			-	91	-			
			-	92	-			
			-	91	-			
Input Reflected Ripple Current		0 to 500KHz, 4.7µH source impedance						
Start Up Time								
Internal Filter Type		Pi Filter						

Output Specifications

Table 3. Output Specifications:

Parameter	Condition	Symbol	Min	Nom	Max	Unit	
Output Voltage Set-Point	Vin=Vin nom; Full Load; TA=25°C	V _O	4.95	5	5.05	Vdc	
			11.88	12	12.12		
			14.85	15	15.15		
			23.76	24	24.24		
			4.95	5	5.05		
			11.88	12	12.12		
			14.85	15	15.15		
			23.76	24	24.24		
Convection Output Current, continuous	Convection cooling	I _O	-	-	15	A	
			-	-	6.25		
			-	-	5		
			-	-	3.125		
			-	-	15		
			-	-	6.25		
			-	-	5		
			-	-	3.125		
Max. Output Capacitance Load	Start up	C	-	-	17000	uF	
			-	-	2950		
			-	-	1900		
			-	-	740		
			-	-	17000		
			-	-	2950		
			-	-	1900		
			-	-	740		
Output Ripple, pk-pk	20MHz bandwidth, Refer to the output specifications or add 4.7µF capacitor if the output specifications undefined Cout.	V _O	-	-	100	mVp-p	
			-	-	150		
		V _O	-	-	150	mVp-p	
Load Transient Response		Measured to within 1% error band 25% Load Step Change	T _s	±3.250	±5	%uSec	
Peak Deviation Settling Time							
Line Regulation		Vin=Min. to Max. @ Full Load	-	-	±0.2	%V _O	
Load Regulation		Min. Load to Full Load	-	-	±0.3	%V _O	
Output Voltage Adjustment Range		V _O	-10	-	+10	%V _O	
Temperature Coefficient		All models	-	-	±0.02	%/°C	
Switching Frequency		f _{SW}	-	320	-	KHz	

ERM15A72 Performance Curves

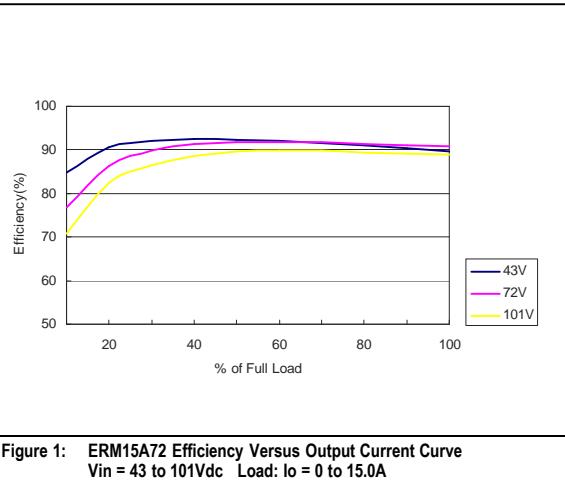


Figure 1: ERM15A72 Efficiency Versus Output Current Curve
Vin = 43 to 101Vdc Load: Io = 0 to 15.0A

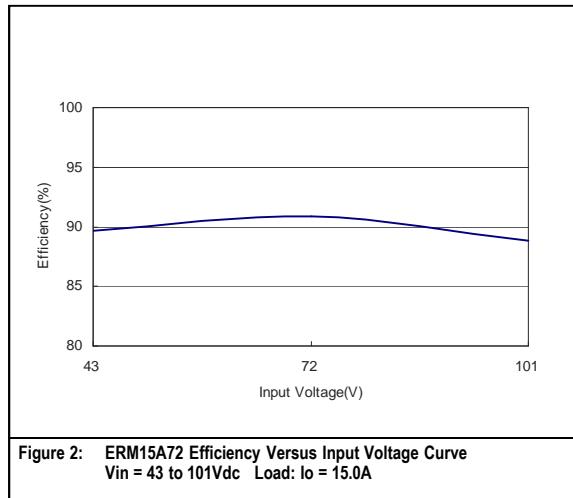


Figure 2: ERM15A72 Efficiency Versus Input Voltage Curve
Vin = 43 to 101Vdc Load: Io = 15.0A

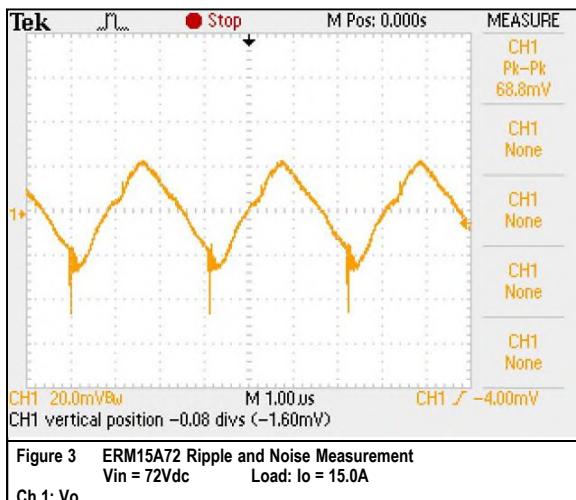


Figure 3 ERM15A72 Ripple and Noise Measurement
Vin = 72Vdc Load: Io = 15.0A

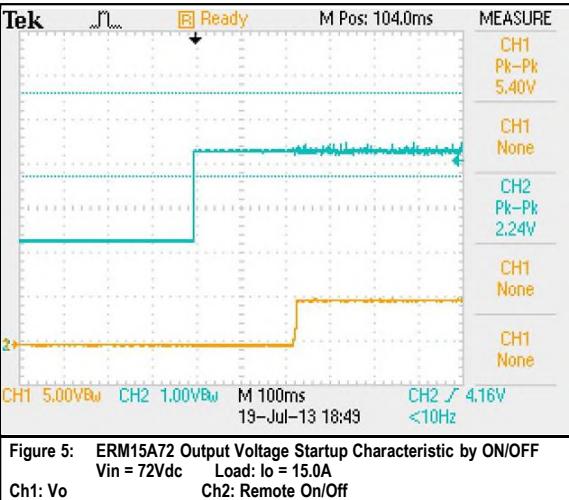


Figure 5: ERM15A72 Output Voltage Startup Characteristic by ON/OFF
Vin = 72Vdc Load: Io = 15.0A
Ch1: Vo Ch2: Remote On/Off

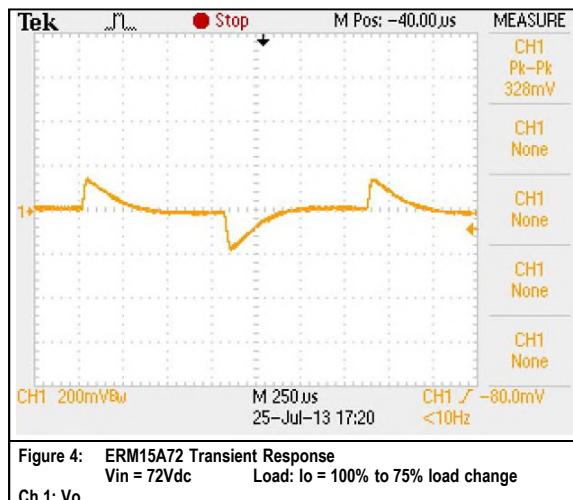


Figure 4: ERM15A72 Transient Response
Vin = 72Vdc Load: Io = 100% to 75% load change

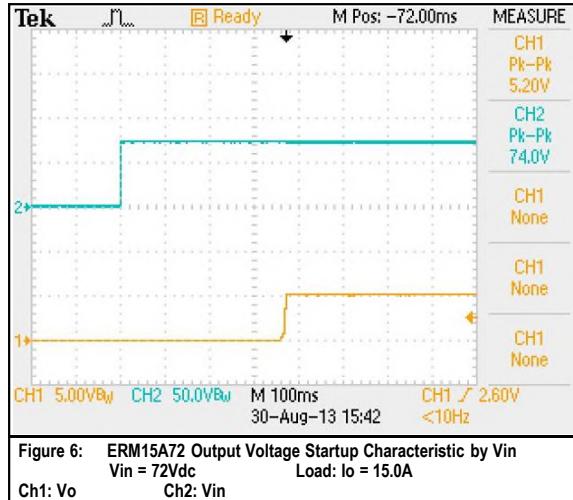


Figure 6: ERM15A72 Output Voltage Startup Characteristic by Vin
Vin = 72Vdc Load: Io = 15.0A
Ch1: Vo Ch2: Vin

ERM15A72 Performance Curves

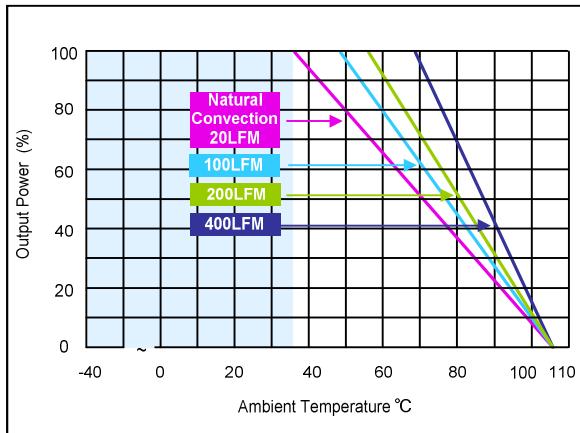


Figure 7: ERM15A72 Derating Curves (without heatsink)
Vin = 72Vdc Load: Io = 0 to 15.0A

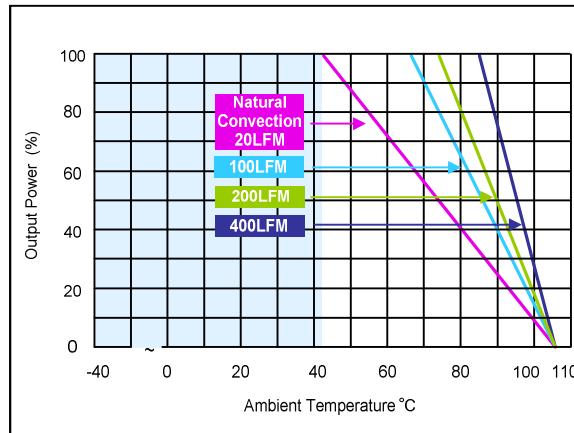


Figure 8: ERM15A72 Derating Curves (with heatsink)
Vin = 72Vdc Load: Io = 0 to 15.0A

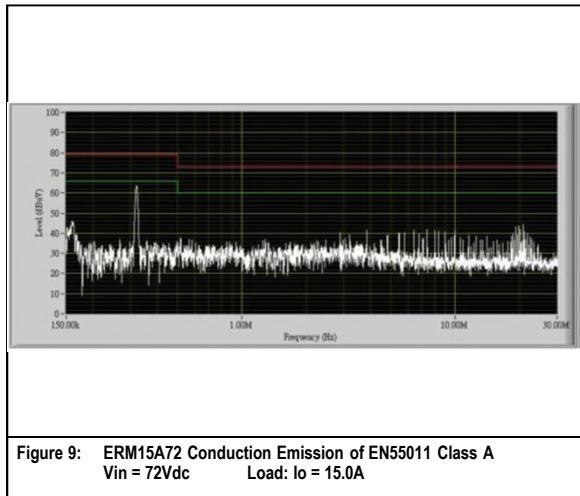


Figure 9: ERM15A72 Conduction Emission of EN55011 Class A
Vin = 72Vdc Load: Io = 15.0A

Note - All test conditions are at 25 °C

ERM06B72 Performance Curves

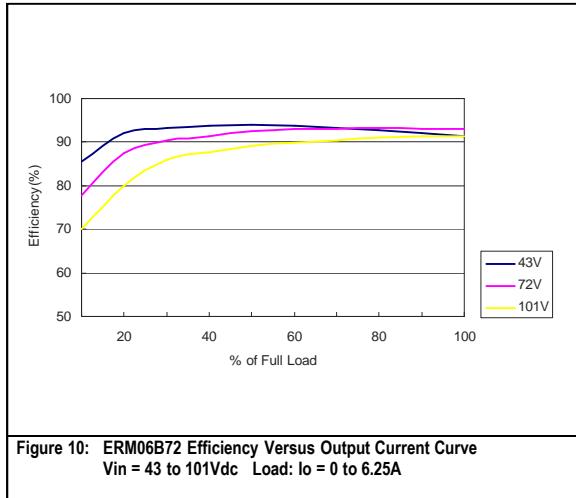


Figure 10: ERM06B72 Efficiency Versus Output Current Curve
Vin = 43 to 101Vdc Load: Io = 0 to 6.25A

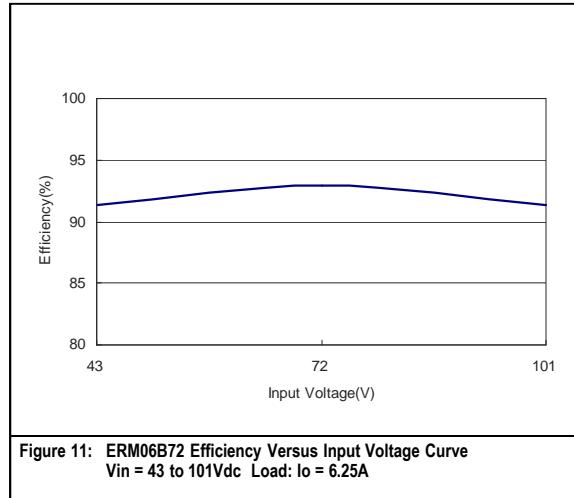


Figure 11: ERM06B72 Efficiency Versus Input Voltage Curve
Vin = 43 to 101Vdc Load: Io = 6.25A

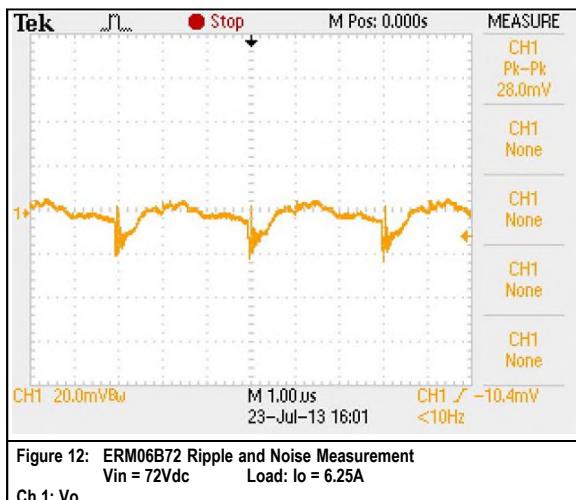


Figure 12: ERM06B72 Ripple and Noise Measurement
Vin = 72Vdc Load: Io = 6.25A
Ch 1: Vo

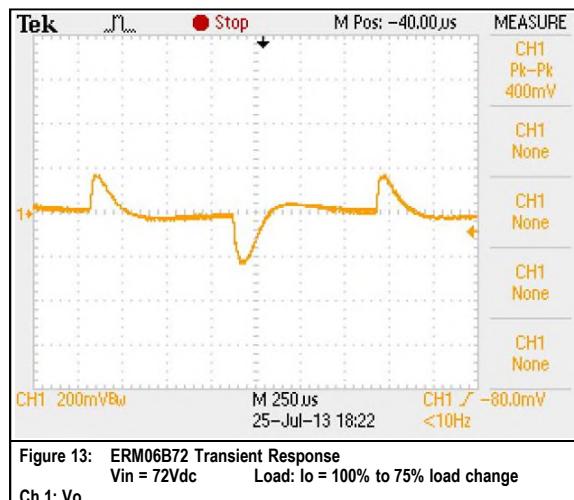


Figure 13: ERM06B72 Transient Response
Vin = 72Vdc Load: Io = 100% to 75% load change
Ch 1: Vo

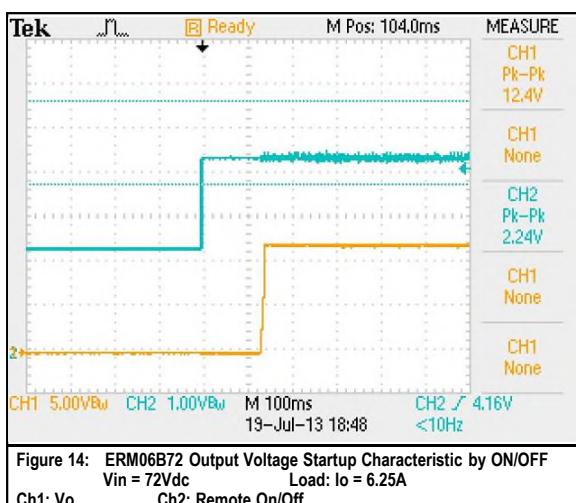


Figure 14: ERM06B72 Output Voltage Startup Characteristic by ON/OFF
Vin = 72Vdc Load: Io = 6.25A
Ch1: Vo Ch2: Remote On/Off

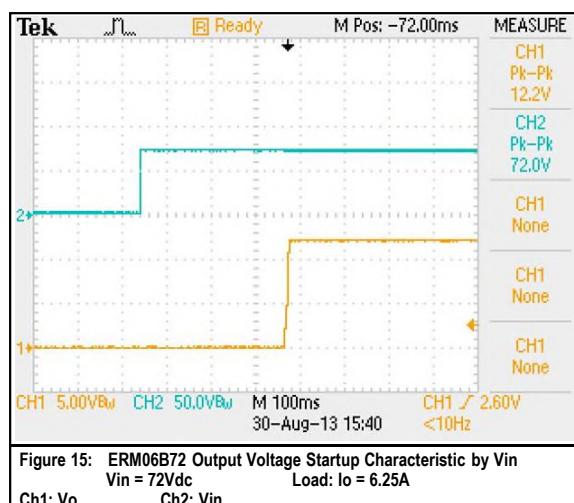


Figure 15: ERM06B72 Output Voltage Startup Characteristic by Vin
Vin = 72Vdc Load: Io = 6.25A
Ch1: Vo Ch2: Vin

ERM06B72 Performance Curves

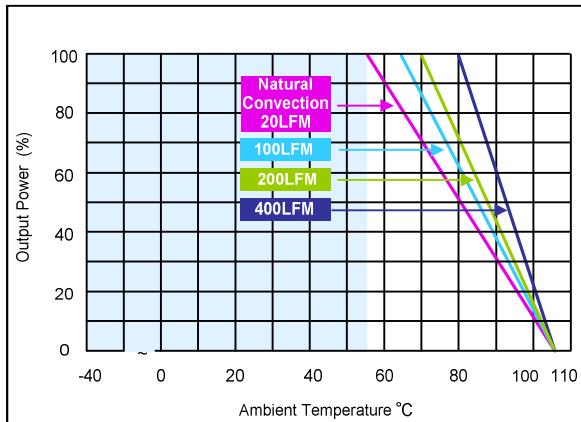


Figure 16: ERM06B72 Derating Curves (without heatsink)
Vin = 72Vdc Load: Io = 0 to 6.25A

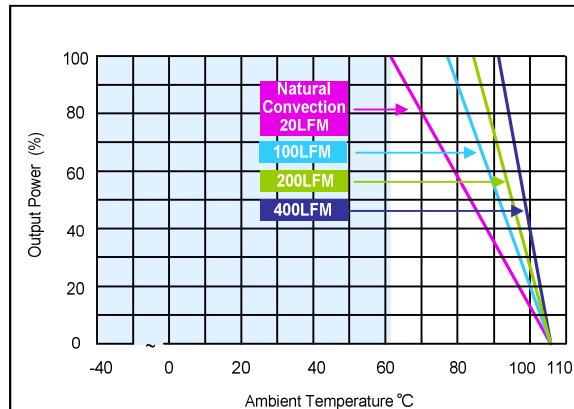


Figure 17: ERM06B72 Derating Curves (with heatsink)
Vin = 72Vdc Load: Io = 0 to 6.25A

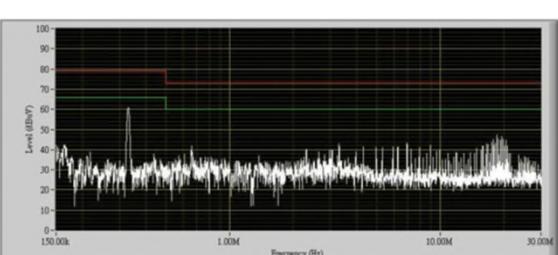


Figure 18: ERM06B72 Conduction Emission of EN55011 Class A
Vin = 72Vdc Load: Io = 6.25A

Note - All test conditions are at 25 °C

ERM05C72 Performance Curves

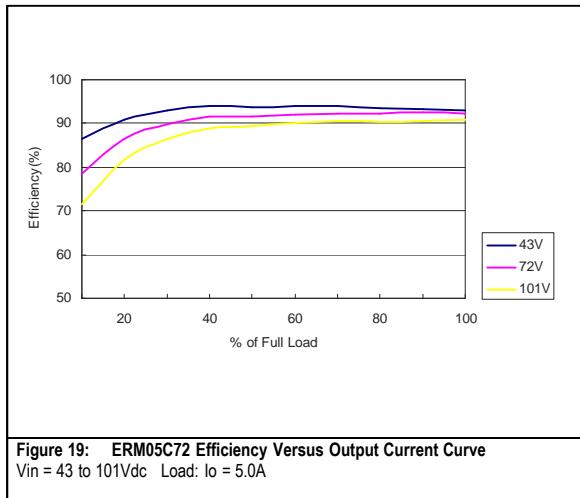


Figure 19: ERM05C72 Efficiency Versus Output Current Curve
Vin = 43 to 101Vdc Load: Io = 5.0A

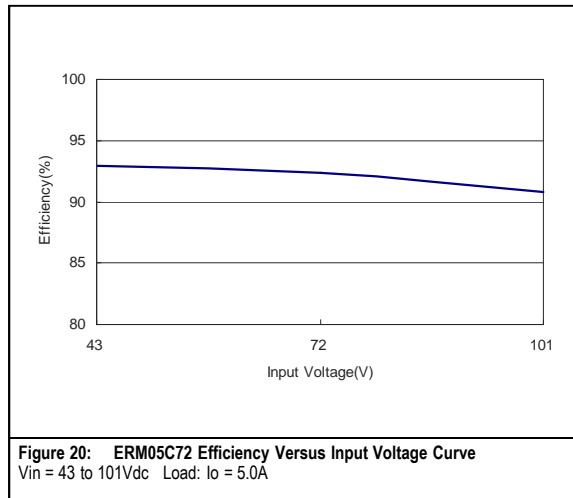


Figure 20: ERM05C72 Efficiency Versus Input Voltage Curve
Vin = 43 to 101Vdc Load: Io = 5.0A

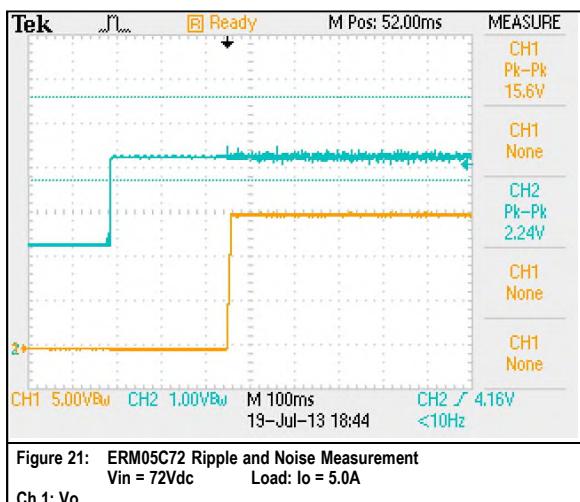


Figure 21: ERM05C72 Ripple and Noise Measurement
Vin = 72Vdc Load: Io = 5.0A
Ch 1: Vo

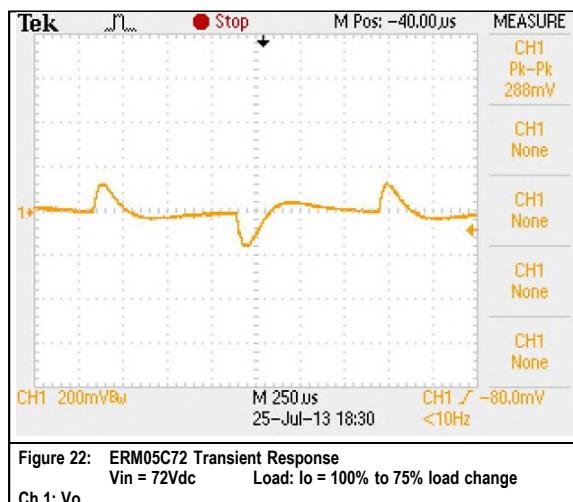


Figure 22: ERM05C72 Transient Response
Vin = 72Vdc Load: Io = 100% to 75% load change
Ch 1: Vo

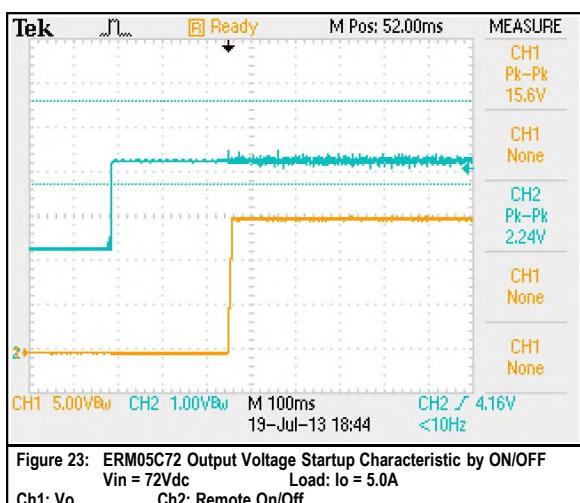


Figure 23: ERM05C72 Output Voltage Startup Characteristic by ON/OFF
Vin = 72Vdc Load: Io = 5.0A
Ch1: Vo Ch2: Remote On/Off

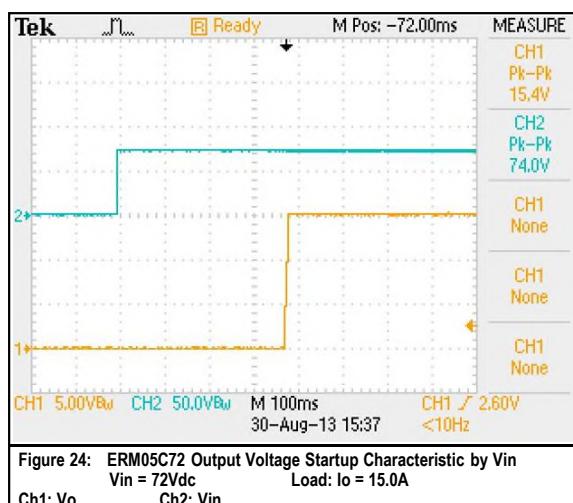


Figure 24: ERM05C72 Output Voltage Startup Characteristic by Vin
Vin = 72Vdc Load: Io = 15.0A
Ch1: Vo Ch2: Vin

ERM05C72 Performance Curves

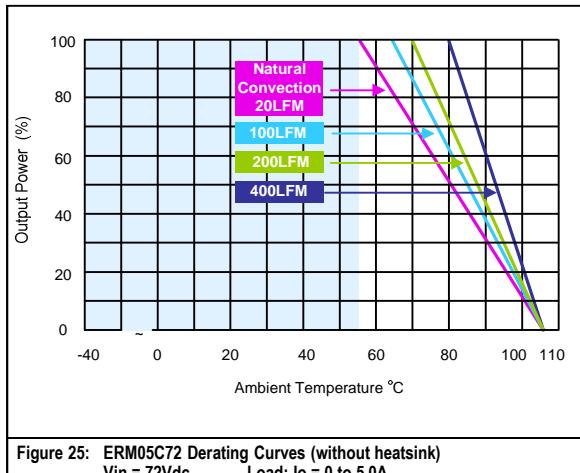


Figure 25: ERM05C72 Derating Curves (without heatsink)
Vin = 72Vdc Load: Io = 0 to 5.0A

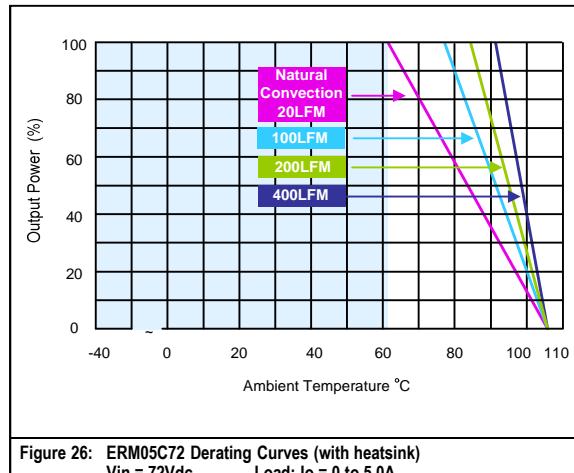


Figure 26: ERM05C72 Derating Curves (with heatsink)
Vin = 72Vdc Load: Io = 0 to 5.0A

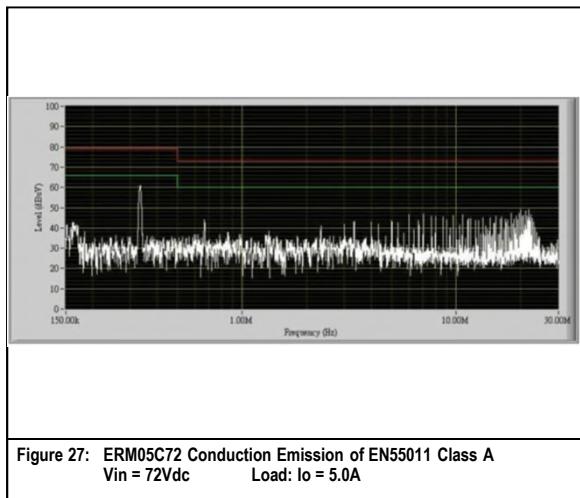


Figure 27: ERM05C72 Conduction Emission of EN55011 Class A
Vin = 72Vdc Load: Io = 5.0A

Note - All test conditions are at 25 °C

ERM03H72 Performance Curves

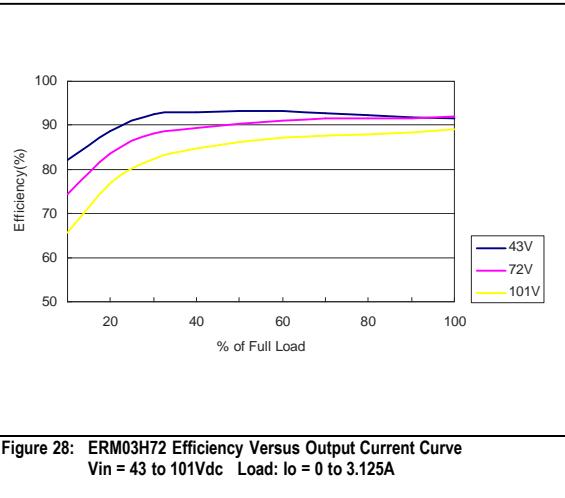


Figure 28: ERM03H72 Efficiency Versus Output Current Curve
Vin = 43 to 101Vdc Load: Io = 0 to 3.125A

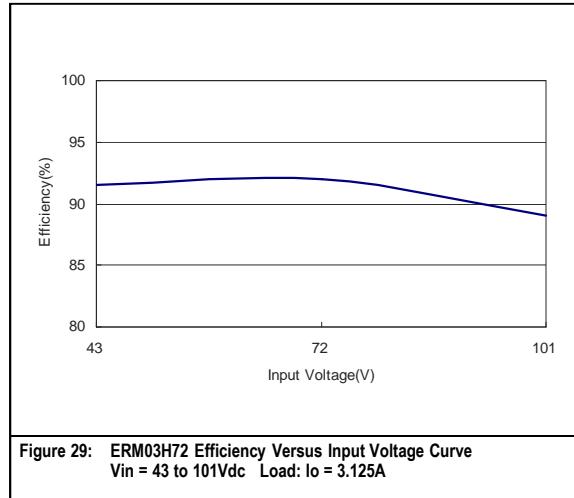


Figure 29: ERM03H72 Efficiency Versus Input Voltage Curve
Vin = 43 to 101Vdc Load: Io = 3.125A

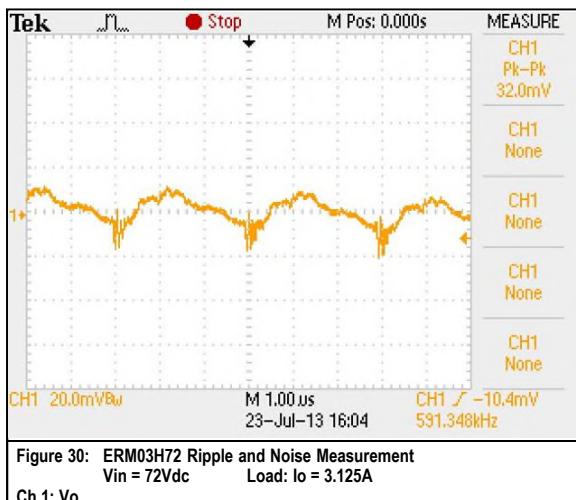


Figure 30: ERM03H72 Ripple and Noise Measurement
Vin = 72Vdc Load: Io = 3.125A
Ch 1: Vo

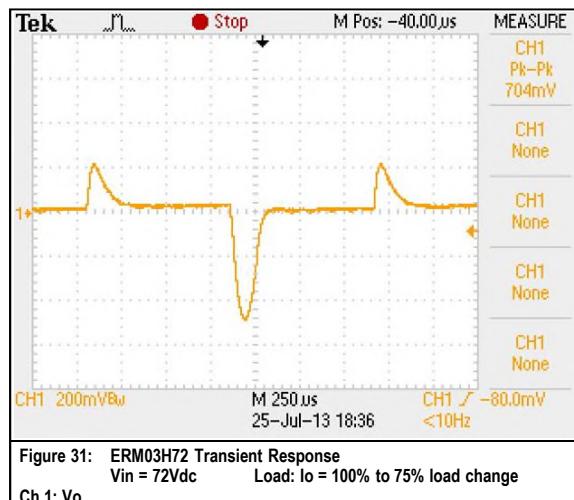


Figure 31: ERM03H72 Transient Response
Vin = 72Vdc Load: Io = 100% to 75% load change
Ch 1: Vo

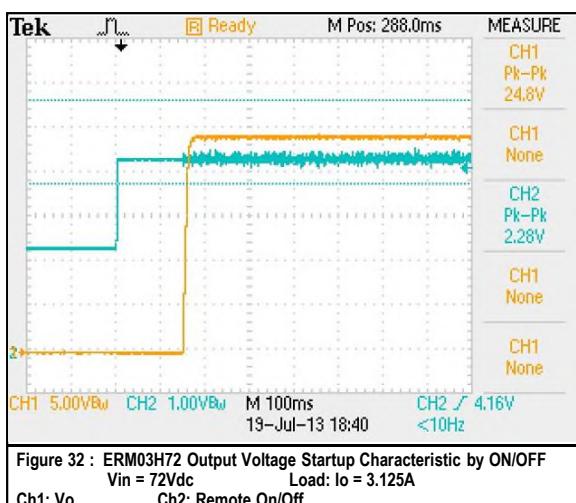


Figure 32 : ERM03H72 Output Voltage Startup Characteristic by ON/OFF
Vin = 72Vdc Load: Io = 3.125A
Ch1: Vo Ch2: Remote On/Off

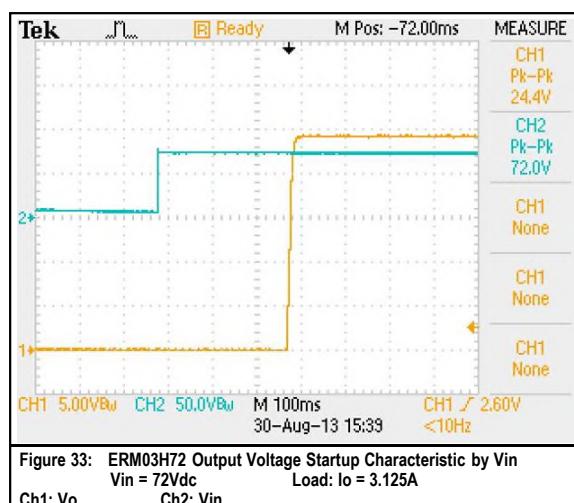


Figure 33: ERM03H72 Output Voltage Startup Characteristic by Vin
Vin = 72Vdc Load: Io = 3.125A
Ch1: Vo Ch2: Vin

ERM03H72 Performance Curves

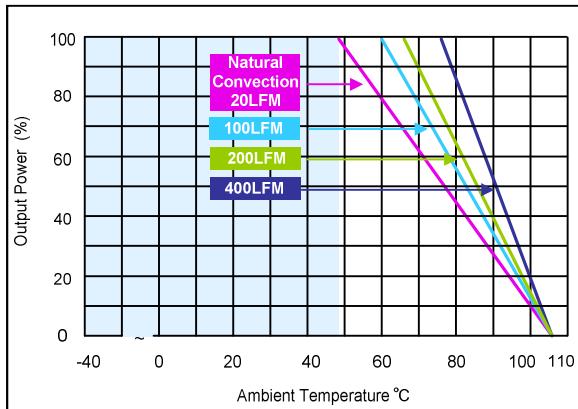


Figure 34: ERM03H72 Derating Curves (without heatsink)
Vin = 72Vdc Load: Io = 0 to 3.125A

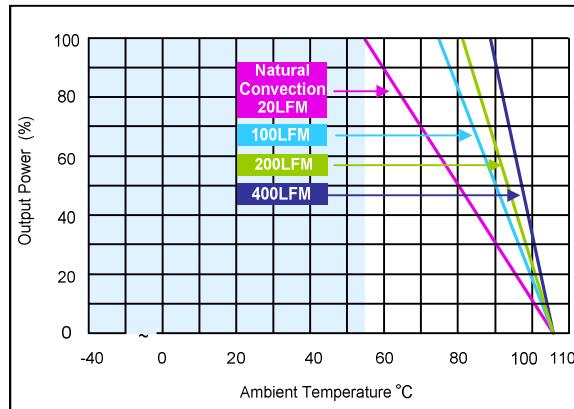


Figure 35: ERM03H72 Derating Curves (with heatsink)
Vin = 72Vdc Load: Io = 0 to 3.125A

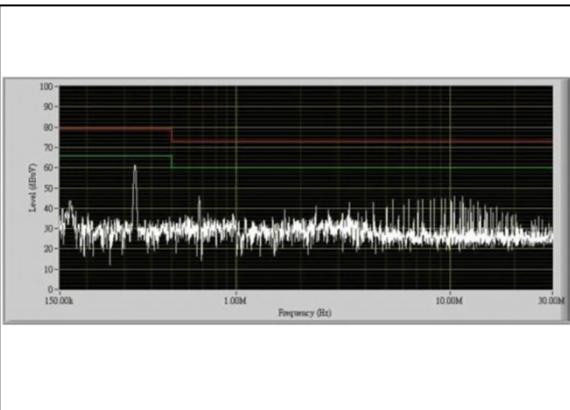


Figure 36: ERM03H72 Conduction Emission of EN55011 Class A
Vin = 72Vdc Load: Io = 3.125A

Note - All test conditions are at 25 °C

ERM15A110 Performance Curves

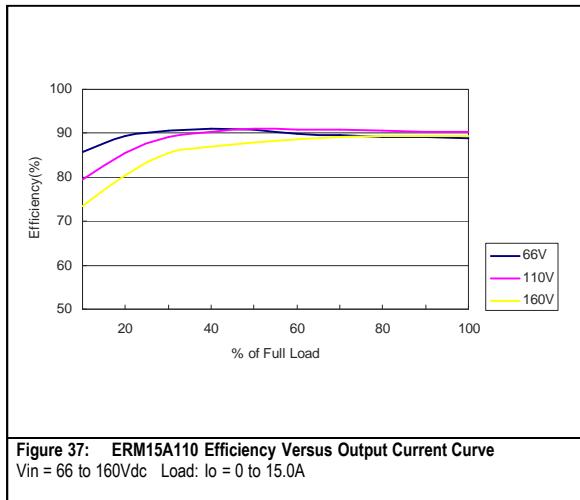


Figure 37: ERM15A110 Efficiency Versus Output Current Curve
Vin = 66 to 160Vdc Load: Io = 0 to 15.0A

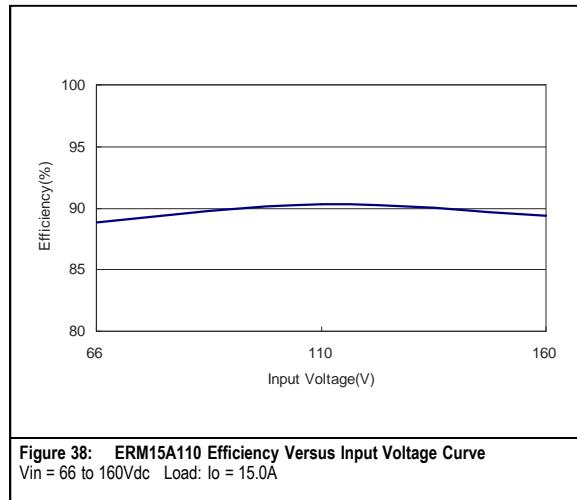


Figure 38: ERM15A110 Efficiency Versus Input Voltage Curve
Vin = 66 to 160Vdc Load: Io = 15.0A

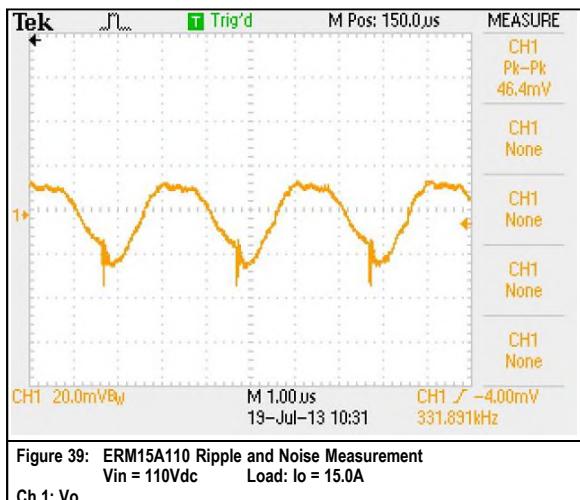


Figure 39: ERM15A110 Ripple and Noise Measurement
Vin = 110Vdc Load: Io = 15.0A
Ch 1: Vo

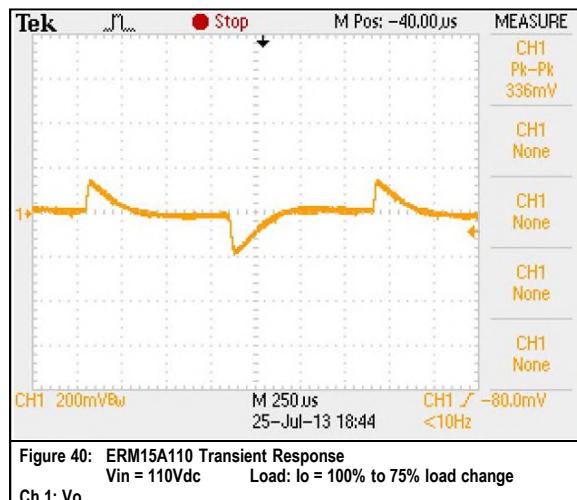


Figure 40: ERM15A110 Transient Response
Vin = 110Vdc Load: Io = 100% to 75% load change
Ch 1: Vo

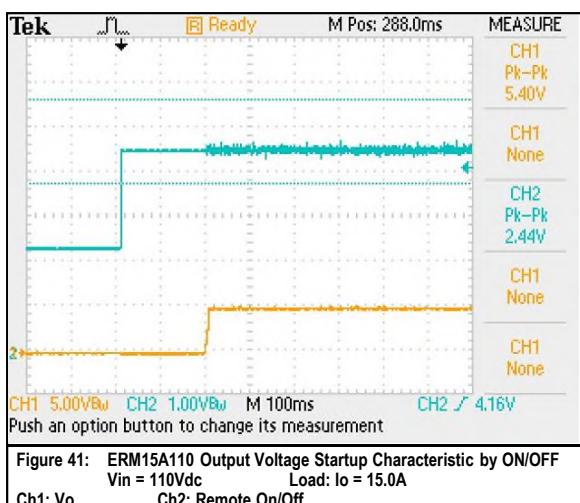


Figure 41: ERM15A110 Output Voltage Startup Characteristic by ON/OFF
Vin = 110Vdc Load: Io = 15.0A
Ch1: Vo Ch2: Remote On/Off

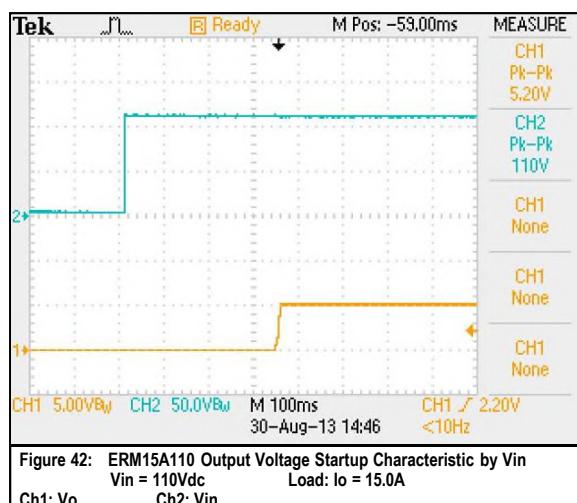


Figure 42: ERM15A110 Output Voltage Startup Characteristic by Vin
Vin = 110Vdc Load: Io = 15.0A
Ch1: Vo Ch2: Vin

ERM15A110 Performance Curves

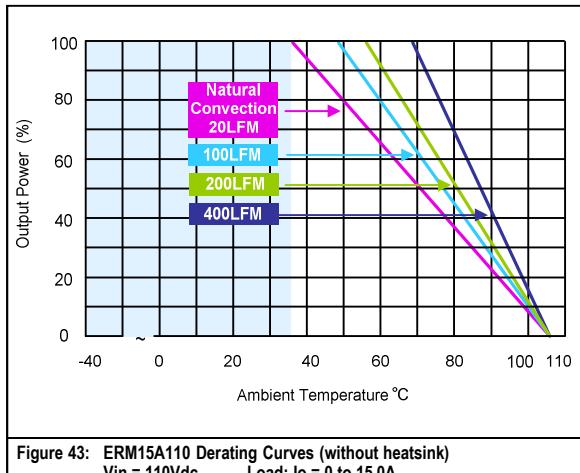


Figure 43: ERM15A110 Derating Curves (without heatsink)
Vin = 110Vdc Load: Io = 0 to 15.0A

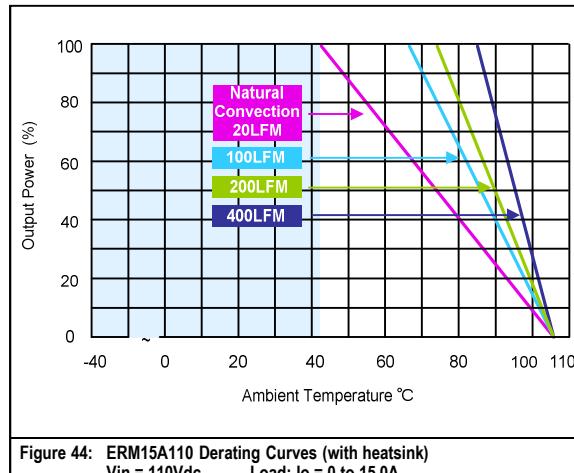


Figure 44: ERM15A110 Derating Curves (with heatsink)
Vin = 110Vdc Load: Io = 0 to 15.0A

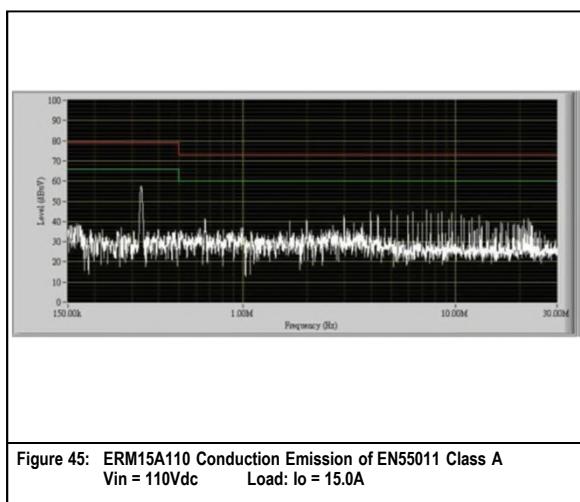


Figure 45: ERM15A110 Conduction Emission of EN55011 Class A
Vin = 110Vdc Load: Io = 15.0A

Note - All test conditions are at 25 °C

ERM06B110 Performance Curves

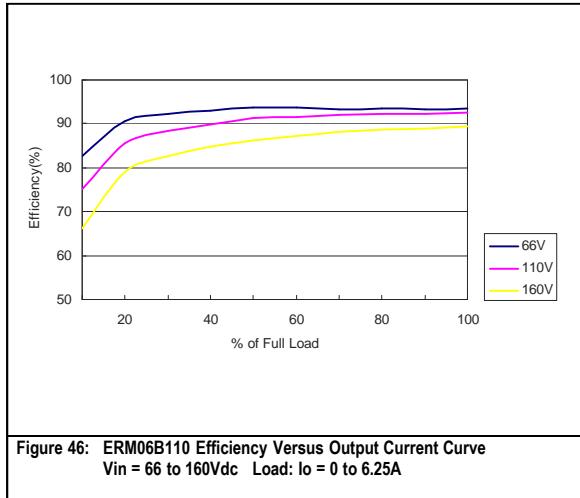


Figure 46: ERM06B110 Efficiency Versus Output Current Curve
Vin = 66 to 160Vdc Load: Io = 0 to 6.25A

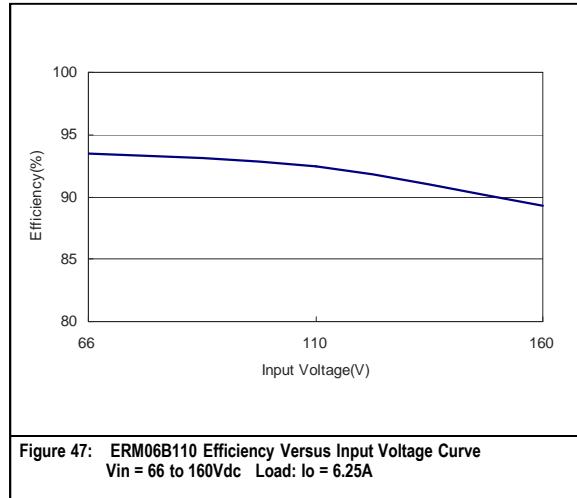


Figure 47: ERM06B110 Efficiency Versus Input Voltage Curve
Vin = 66 to 160Vdc Load: Io = 6.25A

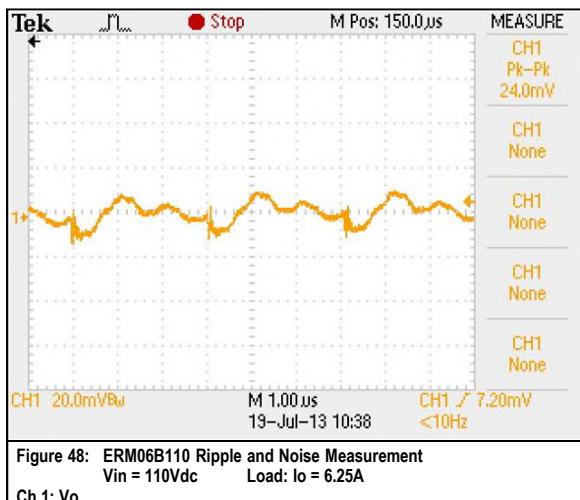


Figure 48: ERM06B110 Ripple and Noise Measurement
Vin = 110Vdc Load: Io = 6.25A
Ch 1: Vo

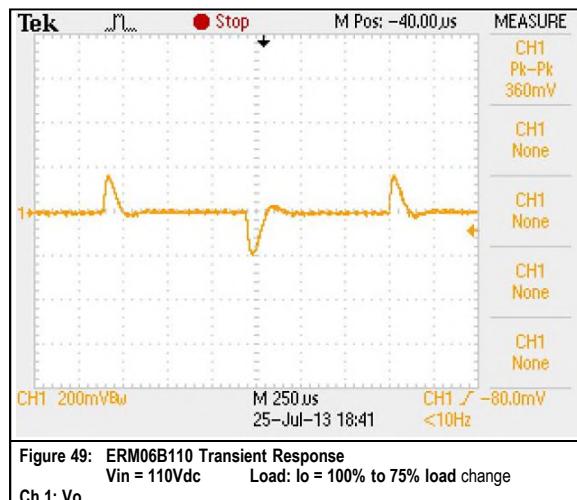


Figure 49: ERM06B110 Transient Response
Vin = 110Vdc Load: Io = 100% to 75% load change
Ch 1: Vo

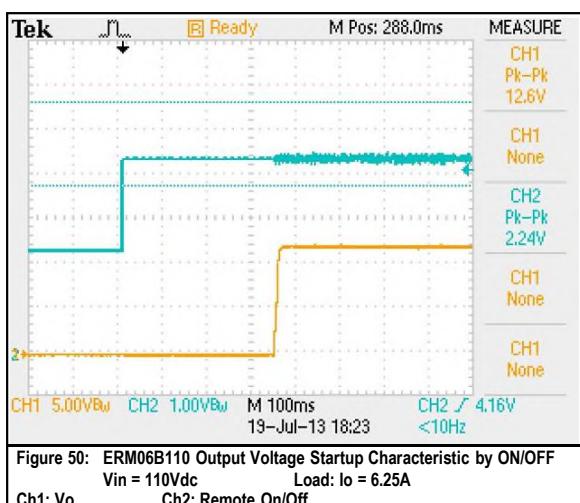


Figure 50: ERM06B110 Output Voltage Startup Characteristic by ON/OFF
Vin = 110Vdc Load: Io = 6.25A
Ch1: Vo Ch2: Remote On/Off

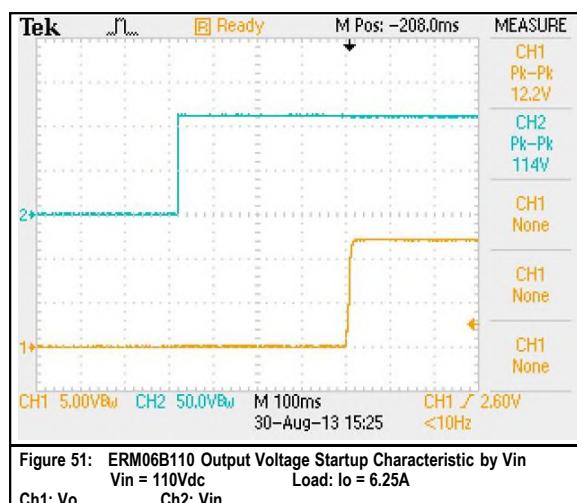


Figure 51: ERM06B110 Output Voltage Startup Characteristic by Vin
Vin = 110Vdc Load: Io = 6.25A
Ch1: Vo Ch2: Vin

ERM06B110 Performance Curves

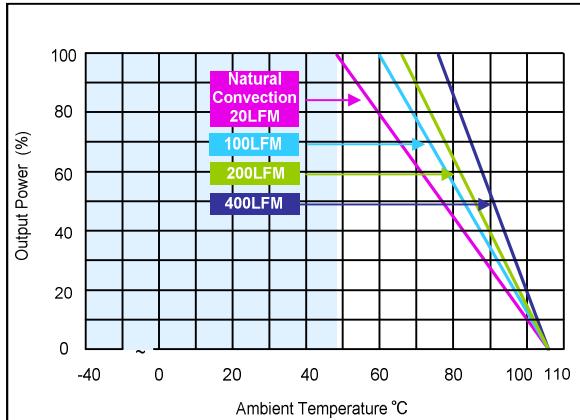


Figure 52: ERM06B110 Derating Curves (without heatsink)
Vin = 110Vdc Load: Io = 0 to 6.25A

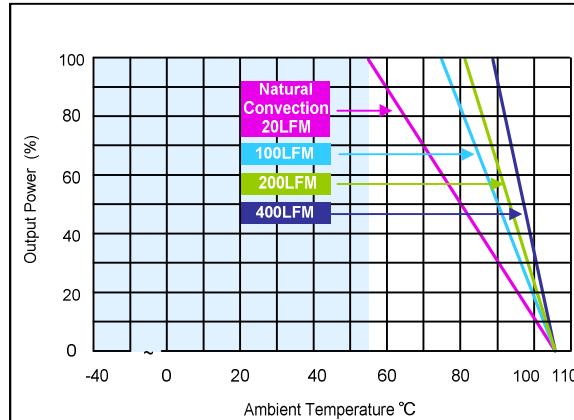


Figure 53: ERM06B110 Derating Curves (with heatsink)
Vin = 110Vdc Load: Io = 0 to 6.25A

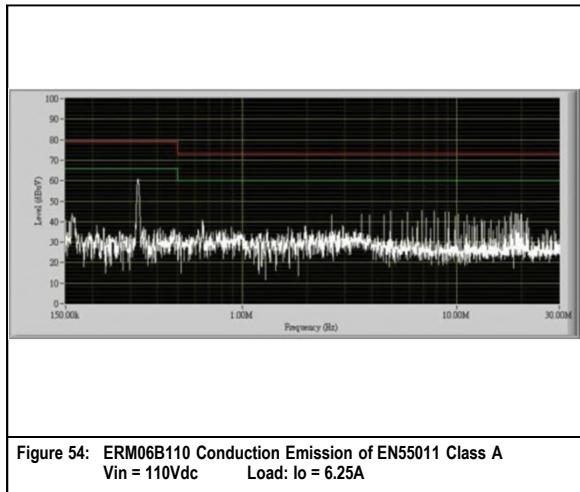


Figure 54: ERM06B110 Conduction Emission of EN55011 Class A
Vin = 110Vdc Load: Io = 6.25A

Note - All test conditions are at 25 °C

ERM05C110 Performance Curves

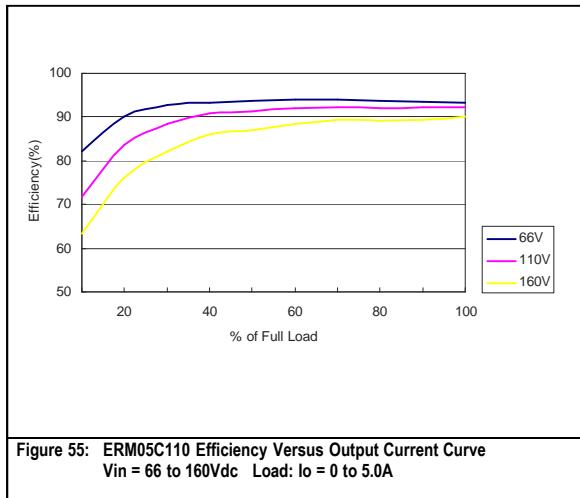


Figure 55: ERM05C110 Efficiency Versus Output Current Curve
Vin = 66 to 160Vdc Load: Io = 0 to 5.0A

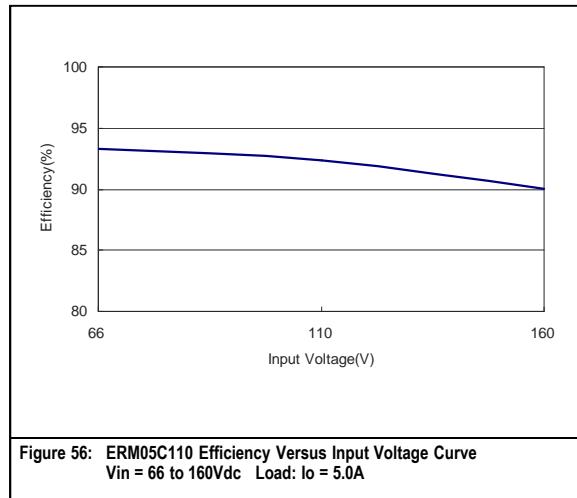


Figure 56: ERM05C110 Efficiency Versus Input Voltage Curve
Vin = 66 to 160Vdc Load: Io = 5.0A

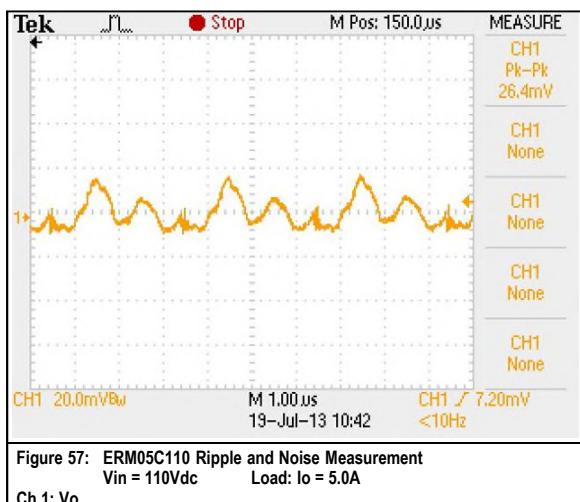


Figure 57: ERM05C110 Ripple and Noise Measurement
Vin = 110Vdc Load: Io = 5.0A
Ch 1: Vo

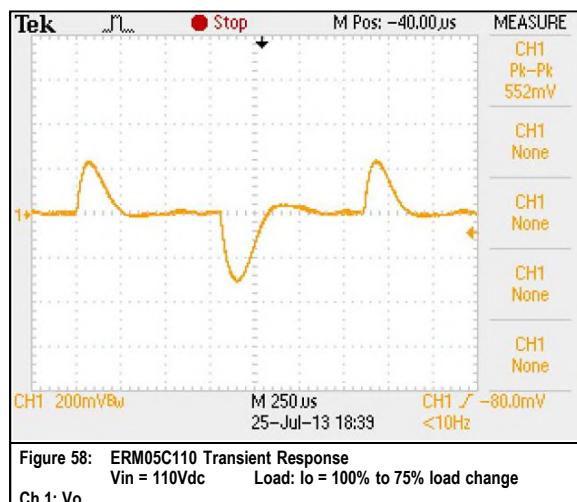


Figure 58: ERM05C110 Transient Response
Vin = 110Vdc Load: Io = 100% to 75% load change
Ch 1: Vo

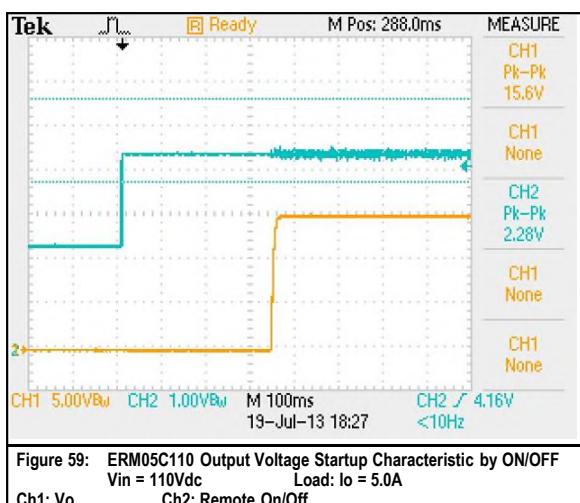


Figure 59: ERM05C110 Output Voltage Startup Characteristic by ON/OFF
Vin = 110Vdc Load: Io = 5.0A
Ch1: Vo Ch2: Remote On/Off

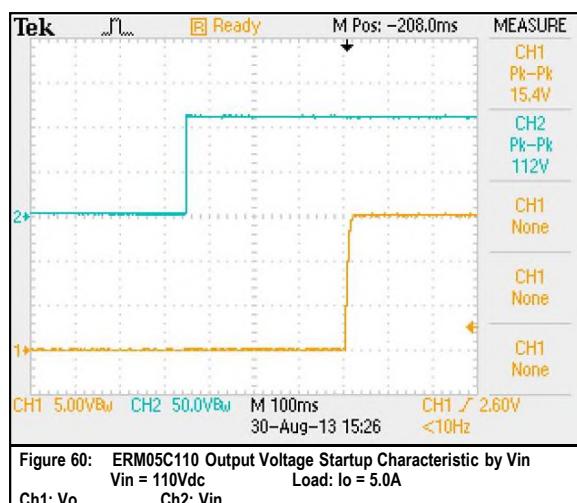


Figure 60: ERM05C110 Output Voltage Startup Characteristic by Vin
Vin = 110Vdc Load: Io = 5.0A
Ch1: Vo Ch2: Vin

ERM05C110 Performance Curves

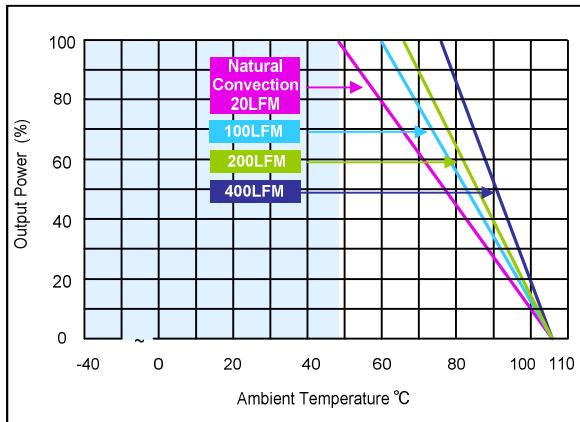


Figure 61: ERM05C110 Derating Curves (without heatsink)
Vin = 110Vdc Load: Io = 0 to 5.0A

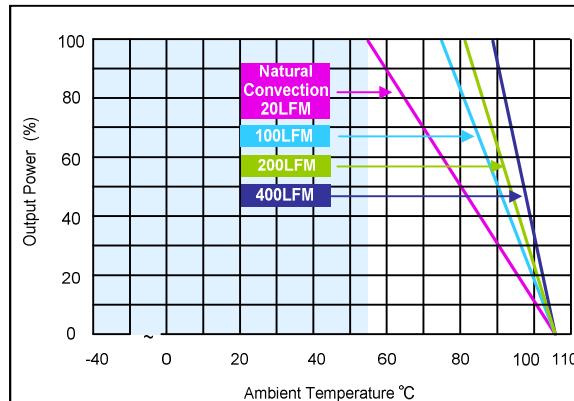


Figure 62: ERM05C110 Derating Curves (with heatsink)
Vin = 110Vdc Load: Io = 0 to 5.0A

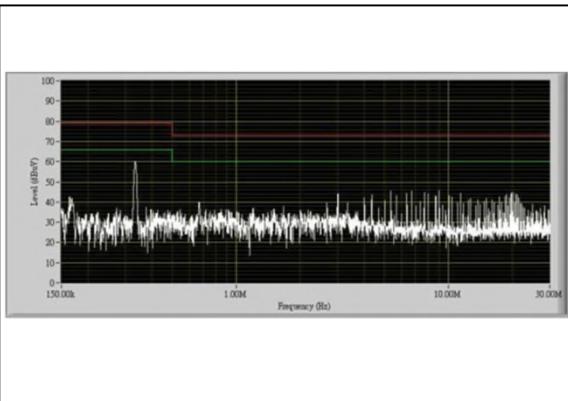


Figure 63: ERM05C110 Conduction Emission of EN55011 Class A
Vin = 110Vdc Load: Io = 5.0A

Note - All test conditions are at 25 °C

ERM03H110 Performance Curves

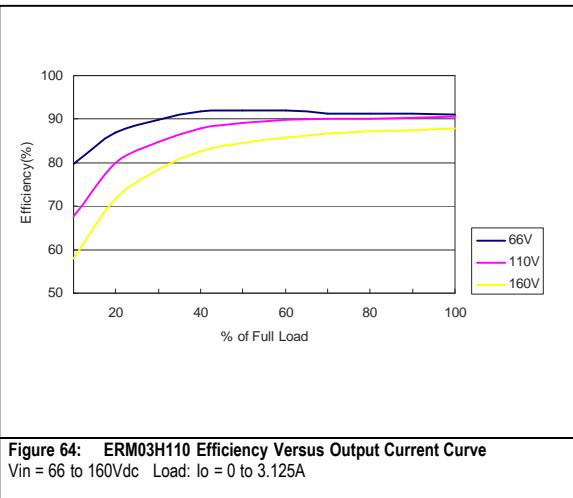


Figure 64: ERM03H110 Efficiency Versus Output Current Curve
Vin = 66 to 160Vdc Load: Io = 0 to 3.125A

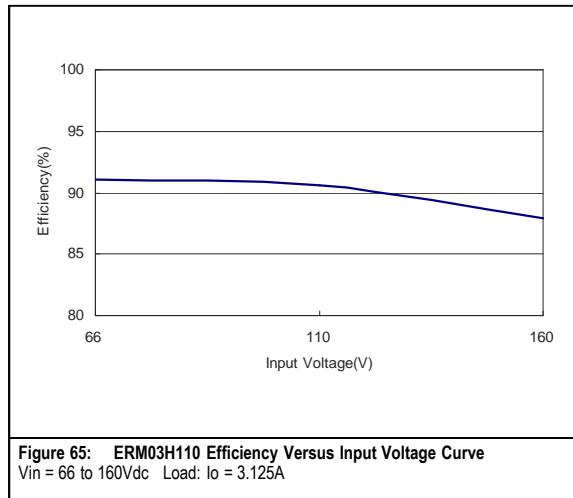


Figure 65: ERM03H110 Efficiency Versus Input Voltage Curve
Vin = 66 to 160Vdc Load: Io = 3.125A

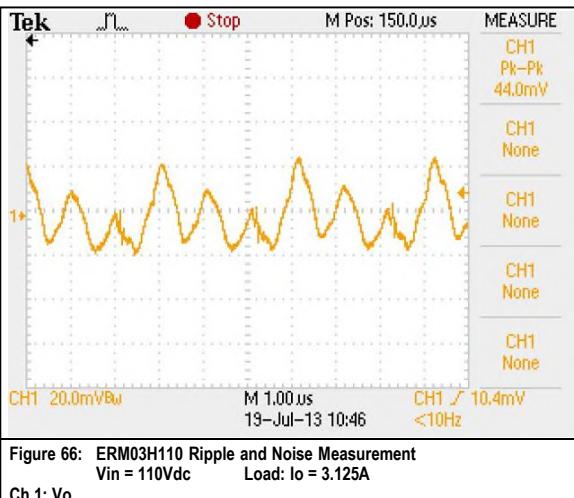


Figure 66: ERM03H110 Ripple and Noise Measurement
Vin = 110Vdc Load: Io = 3.125A
Ch 1: Vo

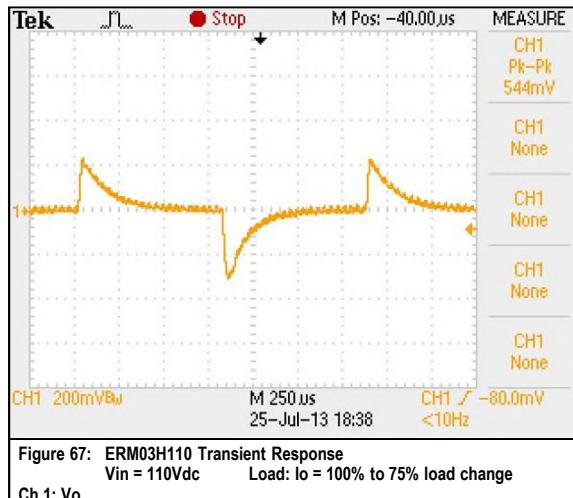


Figure 67: ERM03H110 Transient Response
Vin = 110Vdc Load: Io = 100% to 75% load change
Ch 1: Vo

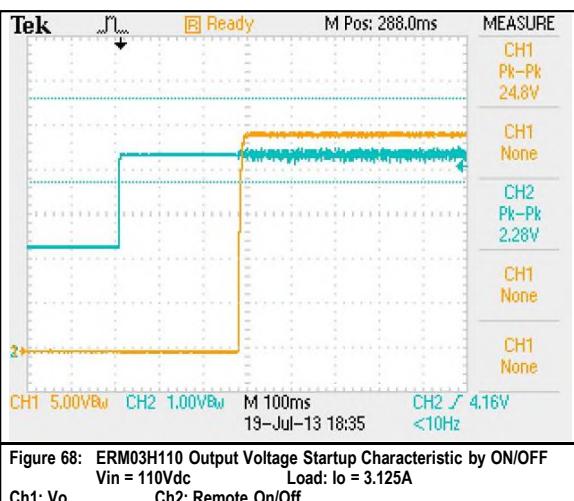


Figure 68: ERM03H110 Output Voltage Startup Characteristic by ON/OFF
Vin = 110Vdc Load: Io = 3.125A
Ch1: Vo Ch2: Remote On/Off

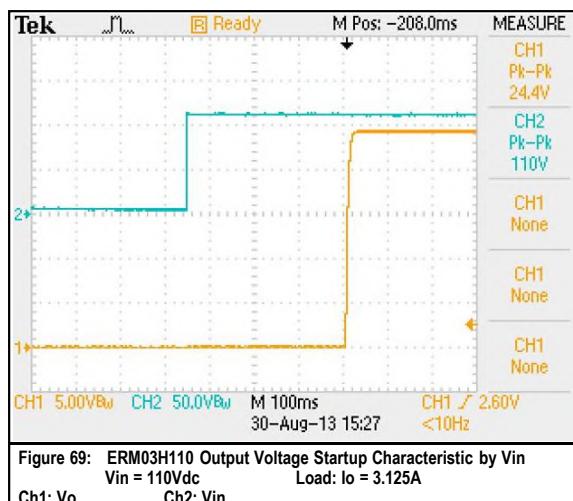


Figure 69: ERM03H110 Output Voltage Startup Characteristic by Vin
Vin = 110Vdc Load: Io = 3.125A
Ch1: Vo Ch2: Vin

ERM03H110 Performance Curves

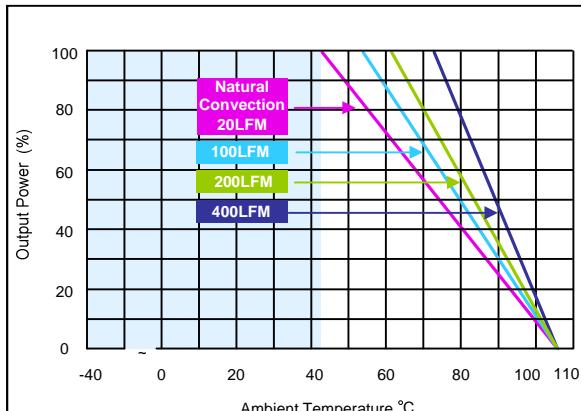


Figure 70: ERM03H110 Derating Curves (without heatsink)
Vin = 110Vdc Load: Io = 0 to 3.125A

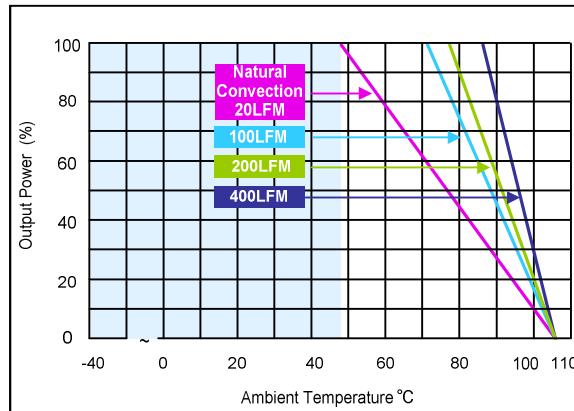


Figure 71: ERM03H110 Derating Curves (with heatsink)
Vin = 110Vdc Load: Io = 0 to 3.125A

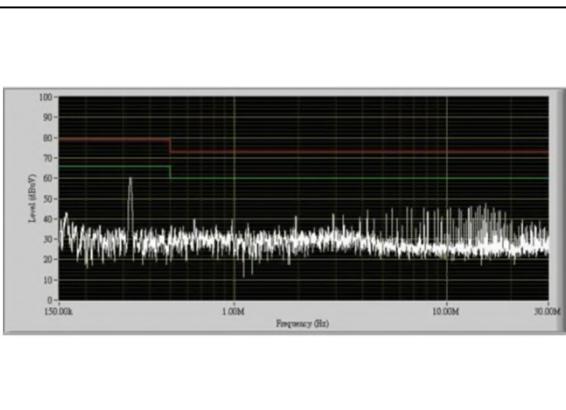


Figure 72: ERM03H110 Conduction Emission of EN55011 Class A
Vin = 110Vdc Load: Io = 3.125A

Note - All test conditions are at 25 °C

Protection Function Specification**Over Voltage Protection (OVP)**

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage.

Parameter		Min	Nom	Max	Unit
V _O Output Overvoltage	ERM15A72 ERM15A110	/	6.2	/	Vdc
	ERM06B72 ERM06B110	/	15	/	Vdc
	ERM05C72 ERM05C110	/	18	/	Vdc
	ERM03H72 ERM03H110	/	30	/	Vdc

Over Temperature Protection (OTP)

Over Temperature (non-latching), base plate temperature.

Parameter		Min	Nom	Max	Unit
Over - temperature		-50	/	110	°C


Over Current Protection (OCP)

Current Limitation at 150% typ. of I_{out} max., Hiccup mode. To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Parameter		Min	Nom	Max	Unit
V _O Output Overcurrent	ERM15A72 ERM15A110	/	22.50	/	A
	ERM06B72 ERM06B110	/	9.38	/	A
	ERM05C72 ERM05C110	/	7.50	/	A
	ERM03H72 ERM03H110	/	4.69	/	A

Mechanical Specifications

Mechanical Outlines

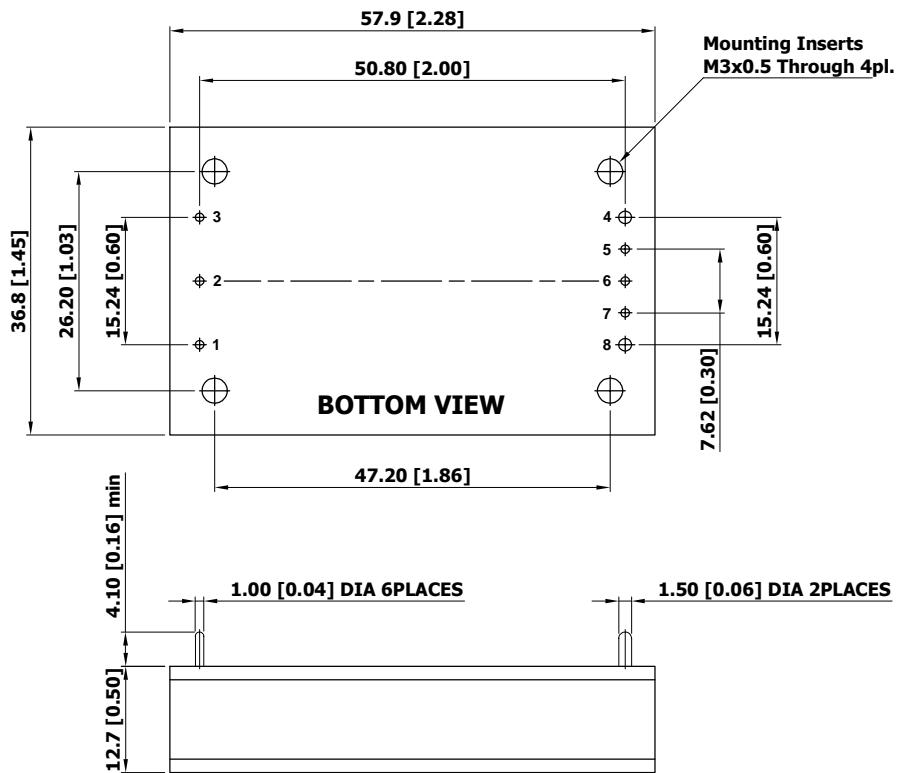

Pin Connections

Note:



1. If remote sense not used, the +sense should be connected to +output and -sense should be connected to -output.
 2. All dimensions in mm (inches)
- Tolerance: $X.X \pm 0.5$ ($X.XX \pm 0.02$)
 $X.XX \pm 0.25$ ($X.XXX \pm 0.01$)
3. Pin diameter: 1.0 ± 0.05 (0.04 ± 0.002)
 4. Pin diameter: 1.5 ± 0.05 (0.06 ± 0.002)

Physical Characteristics

Table 4.

Case Size	57.9x36.8x12.7 mm (2.28x1.45x0.5 inches)
Case Material	Aluminum Frame with Black Anodized Coating
Top Side Base Material	Aluminum Plate
Bottom Side Base Material	Non-conductive Black Plastic Base Plate
Potting Material	Epoxy (UL94-V0)

Heatsink (Option –HS)

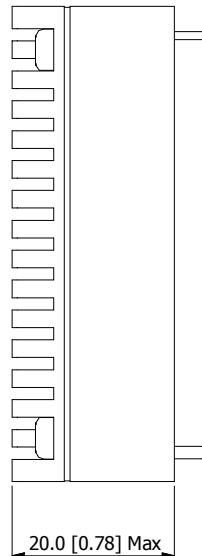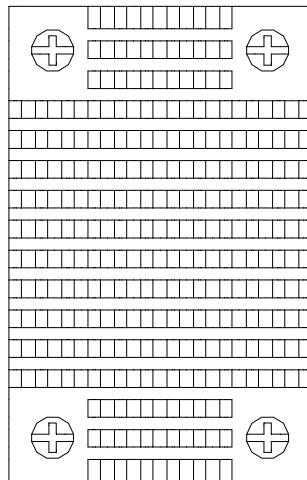


Heatsink Material: Aluminum

Finish: Black Anodized Coating


Weight: 13g

The advantages of adding a heatsink are:

1. To help heat dissipation and increase the stability and reliability of DC/DC converters at high operating temperature atmosphere.
2. To upgrade the operating temperature of DC/DC converters, please refer to Derating Curve.

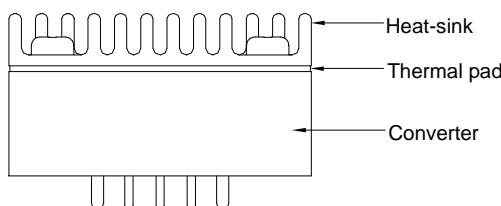

Recommended Pad Layout

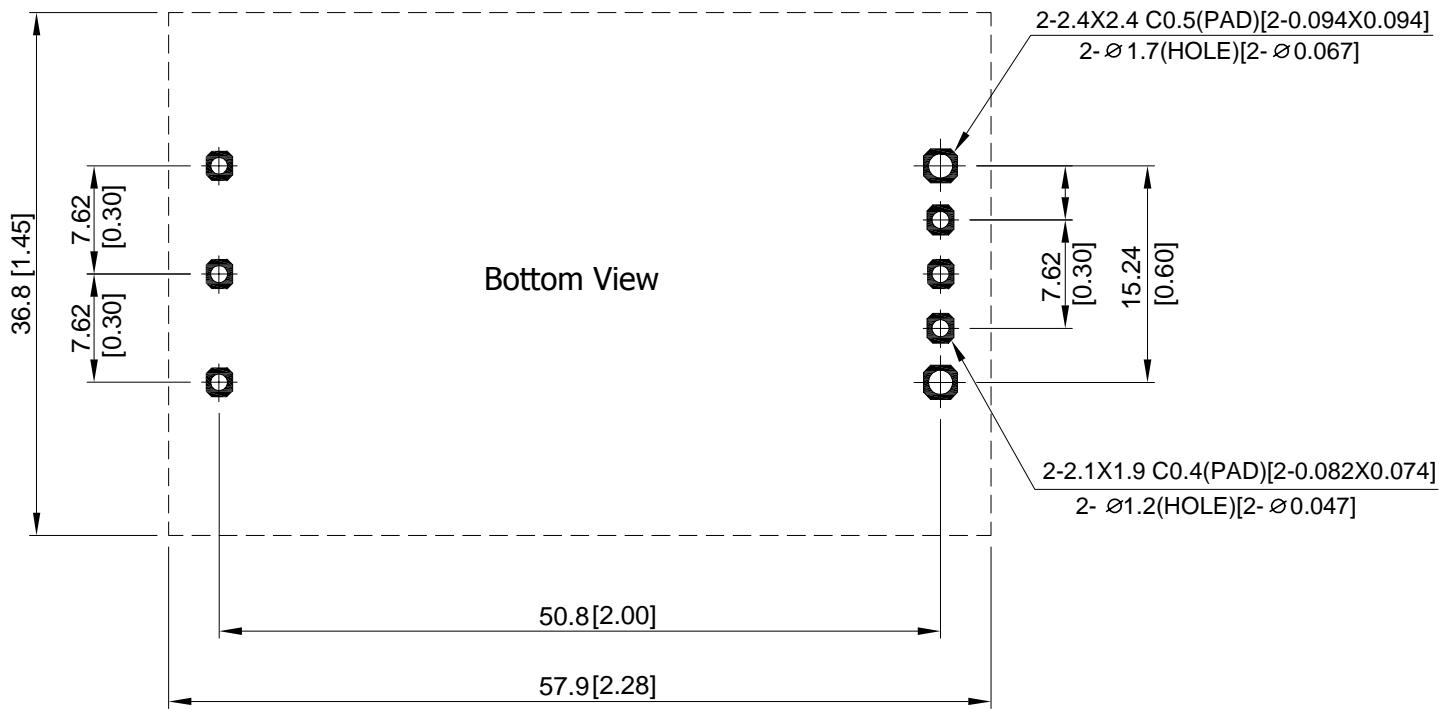

Environmental Specifications

EMC Immunity

ERM75 series power supply is designed to meet the following EMC immunity specifications. The ERM75 series can meet EN61000-4-4 & EN61000-4-5 by adding a capacitor across the input pins. Suggested capacitor: CHEMI-CON KXG 470uF/200V.

Table 5. EMC Specifications:

Parameter	Standards & Level		Performance
General	Compliance with EN 50121-3-2 Railway Applications		
EMI	EN55022, EN55011, FCC part15		Class A
EMS	EN55024		
	ESD	EN61000-4-2 air $\pm 8\text{KV}$, Contact $\pm 6\text{KV}$	Perf. Criteria A
	Radiated immunity	EN61000-4-3 10V/m	Perf. Criteria A
	Fast transient	EN61000-4-4 $\pm 2\text{KV}$	Perf. Criteria A
	Surge	EN61000-4-5 $\pm 1\text{KV}$	Perf. Criteria A
	Conducted immunity	EN61000-4-6 10Vrms	Perf. Criteria A

Safety Certifications

The ERM75 power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 6. Safety Certifications for ERM75 series power supply system

Document	Description
cUL/UL 60950-1	US and Canada Requirements
IEC/EN 60950-1	European Requirements
IEC/EN 50155	Railway standard
IEC60571	Railway standard
CE	European Requirements

Operating Temperature

Table 8. Environmental Specifications:

Parameter	Model / Condition	Min	Max		Unit
			Without Heatsink	With Heatsink	
Operating Ambient Temperature Range Natural Convection ¹ Nominal Vin, Load 100% Inom	ERM06B72 ERM05C72 ERM05C110 ERM03H72 ERM06B110 ERM03H110 ERM15A72 ERM15A110	-40	56 56 49 49 49 43 36 36	61 61 55 55 55 48 42 42	°C
Thermal Impedance	Natural Convection without Heatsink	7.5	-	-	°C/W
	Natural Convection with Heatsink	6.8	-	-	
	100LFM Convection without Heatsink	6.1	-	-	
	100LFM Convection with Heatsink	4.1	-	-	
	200LFM Convection without Heatsink	5.3	-	-	
	200LFM Convection with Heatsink	3.3	-	-	
	400LFM Convection without Heatsink	3.9	-	-	
	400LFM Convection with Heatsink	2.2	-	-	
Operating Base-plate Temperature Range		-40	+105		°C
RFI	Six-Sided Shielded, Metal Case				
Lead Temperature (1.5mm from case for 10Sec.)		-	260		°C

Note1 - The "natural convection" is about 20LFM but is not equal to still air (0 LFM).

MTBF and Reliability

The MTBF of ERM75 series of DC/DC converters has been calculated using MIL-HDBK 217F NOTICE2, Operating Temperature 25 °C, Ground Benign.

Model	MTBF	Unit
ERM15A72	144,400	Hours
ERM06B72	316,000	
ERM05C72	292,200	
ERM03H72	259,100	
ERM15A110	143,800	
ERM06B110	265,900	
ERM05C110	248,800	
ERM03H110	210,400	

Power and Control Signal Descriptions

Power and Signal Pins

These pins provide power and signal interface to the ERM75 series module.

Pin 1	- Vin (+)	- Input Voltage Positive
Pin 2	- Remote On/Off	- ON / OFF Control
Pin 3	- Vin (-)	- Input Voltage Return
Pin 4	- Vout (-)	- Output Voltage Return
Pin 5	- SENSE (-)	- Remote Sense Return
Pin 6	- TRIM	- Output Voltage Trim
Pin 7	- SENSE (+)	- Remote Sense Positive
Pin 8	- Vout (+)	- Output Voltage Positive

Vin (+), Vin (-) - (Pins 1, 3)

These pins are the Input Voltage Positive and Input Voltage Return pins of the module.

Remote On/Off - (Pin 2)

Remote On/Off pin allows the user to turn ON and OFF the output of the ERM75 series modules.

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0V ~ 1.2V or Short Circuit				
Control Input Current (on)	Vctrl = 5.0V	-	0.5	-	mA
Control Input Current (off)	Vctrl = 0V	-	-0.5	-	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Nominal Vin	-	2.5	-	mA

Vout (+), Vout (-) – (Pins 8, 4)

These pins are the Output Voltage Positive and Output Voltage Return pins of the module.

SENSE (+), SENSE (-) – (Pins 7, 5)


The ERM75 is equipped with a Remote Sensing capability that will compensate for voltage drop between the output pins of the module and the sensed voltage point (load). This feature is implemented by connecting the SENSE (+) (pin 7) and the SENSE (-) (pin 5) to the positive and return rails of the output, respectively, at a location that is near to the load. Care should be taken in the routing of the sense lines as any noise sources or additional filtering components introduced into the output voltage rail may affect the stability of the power supply. The ERM75 series will operate appropriately without the sense lines connected; however it is recommended that the sense lines be connected directly to the output pins if remote sensing is not required.

Technical Reference Note

Rev.02.08.18_#1.8
ERM75 Series
Page 32

TRIM – (Pin 6)

Output can be externally trimmed by using the method shown below. The trim up/down range is $\pm 10\%$ minimum of the nominal output voltage

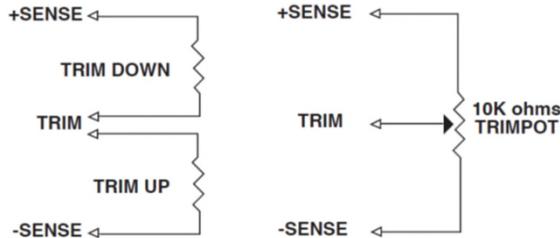

ERM15AXX Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	45.53	20.61	12.31	8.15	5.66	4.00	2.81	1.92	1.23	0.68	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	36.57	16.58	9.92	6.59	4.59	3.25	2.30	1.59	1.03	0.59	KOhms

ERM06BXX Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	394.50	179.74	106.08	68.86	46.39	31.36	20.60	12.51	6.21	1.17	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	368.92	161.92	94.97	61.86	42.12	29.00	19.66	12.66	7.23	2.89	KOhms

ERM05CXX Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	572.67	248.63	145.60	94.97	64.87	44.92	30.72	20.10	11.86	5.28	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	392.98	182.12	108.73	71.43	48.85	33.71	22.86	14.69	8.33	3.23	KOhms


ERM03HXX Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	512	229.6	138.3	90.3	60.7	42.4	29.04	18.67	11.09	4.78	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	574	256.9	149.6	96.5	64.7	43.28	27.68	16.72	7.68	1.11	KOhms

Application Notes

Input Reflected-Ripple Current Test Setup


Input reflected-ripple current is measured with an inductor Lin (4.7 μ H) and Cin (220 μ F, ESR < 1.0 Ω at 100 KHz) to simulate source impedance. Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

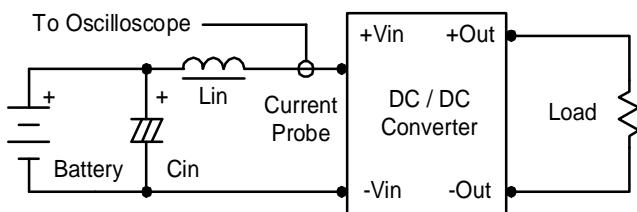

Component	Value	Reference
Lin	4.7 μ H	-
Cin	220 μ F (ESR<1.0 Ω at 100KHz)	Aluminum Electrolytic Capacitor


Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

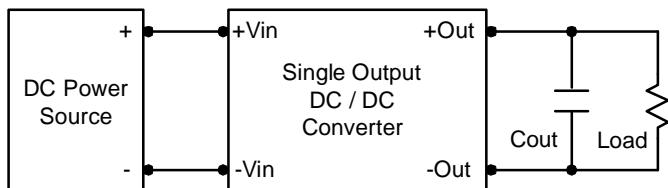

Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7 μ F capacitor if the output specifications undefine Cout. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

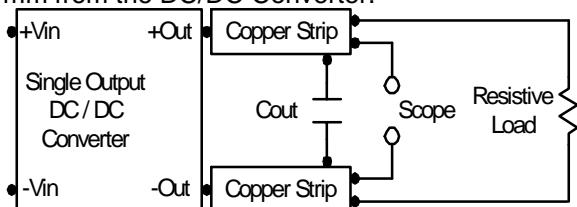


Maximum Capacitive Load


The ERM75 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in below table.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 °C. The derating curves are determined from measurements obtained in a test setup.

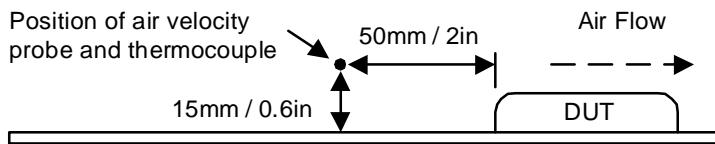


Output voltage and efficiency measurement test up

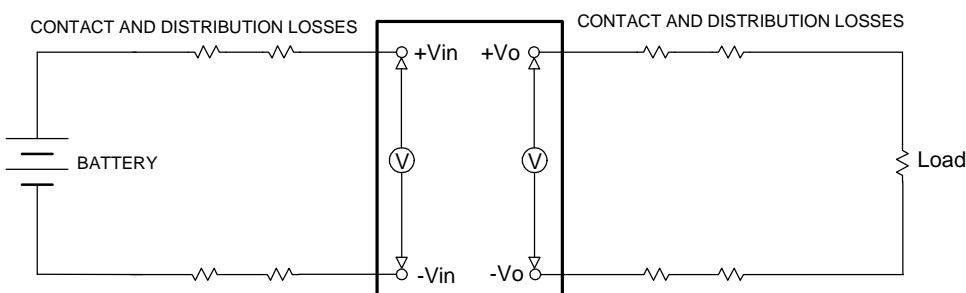


$$\text{Efficiency} = \left(\frac{V_{out} \times I_{out}}{V_{in} \times I_{in}} \right) \times 100\% = [\%]$$

EMI Emissions

Recommended circuit to comply EN55011 / EN55022 Class A Limits

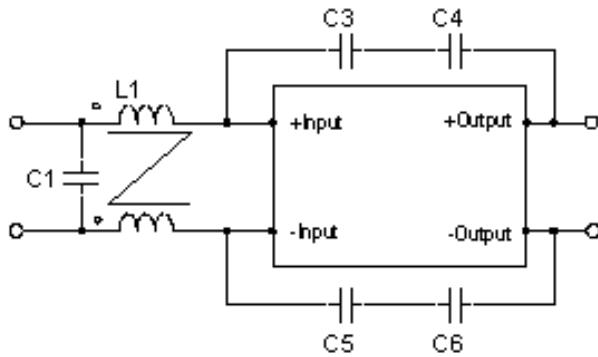

Recommended PCB Layout with Input Filter

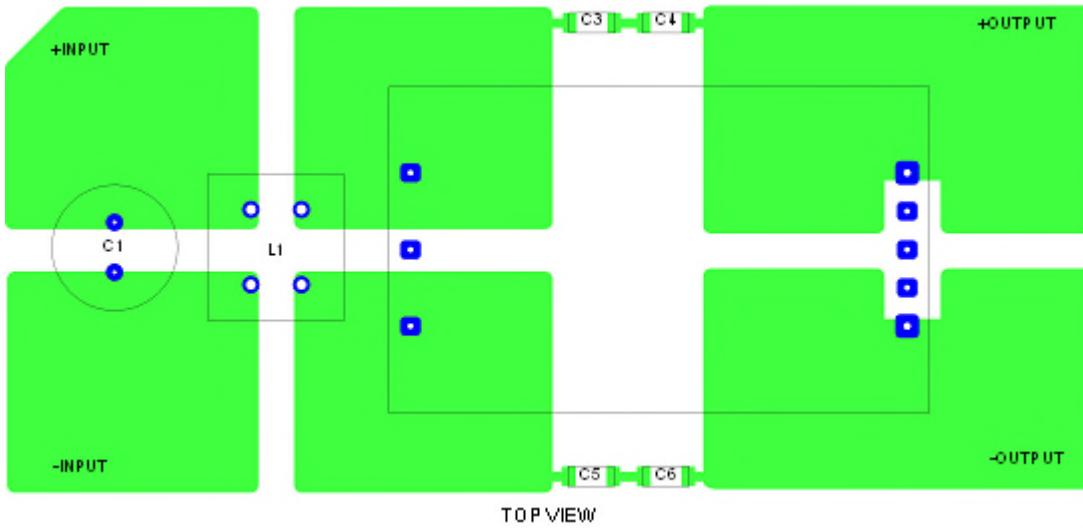

To: comply with EN55011 / EN55022 CLASS A following components are needed:

Model	Component	Value
ERM75 Series	C1	CHEMI-CON KXG Series 68uF/200V
	C3.C4.C5.C6	2200pF/3KV
	L1	450µH/450µH

Input Source Impedance


The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.


Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a capacitor of a 3.3uF for the 72V input devices and a 1uF for the 110V input devices.

Remote ON/OFF Control

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100uA. The ON/OFF input signal ($V_{on/off}$) that referenced to GND. If not using the remote on/off feature, please open circuit between on/off pin and -Vin pin to turn the module on. Remote ON/OFF implementation is below.

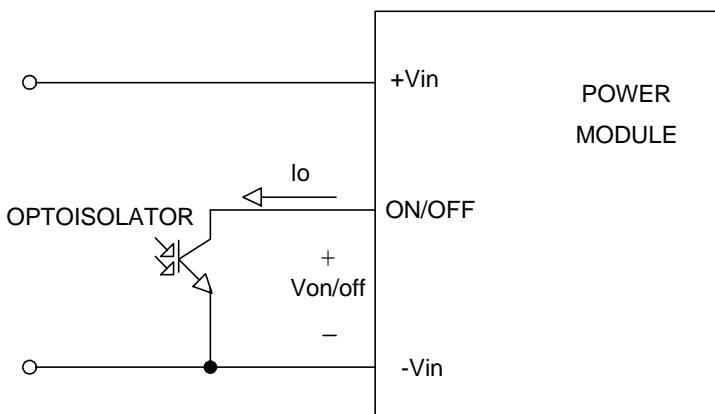


Isolated-Closure Remote ON/OFF

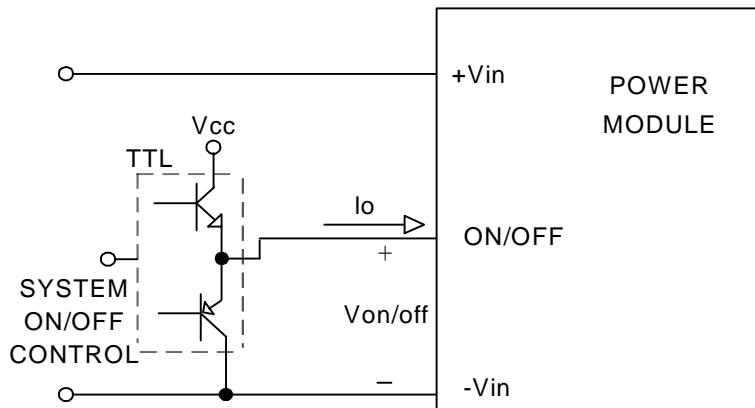


Level Control Using TTL Output

Packaging Information

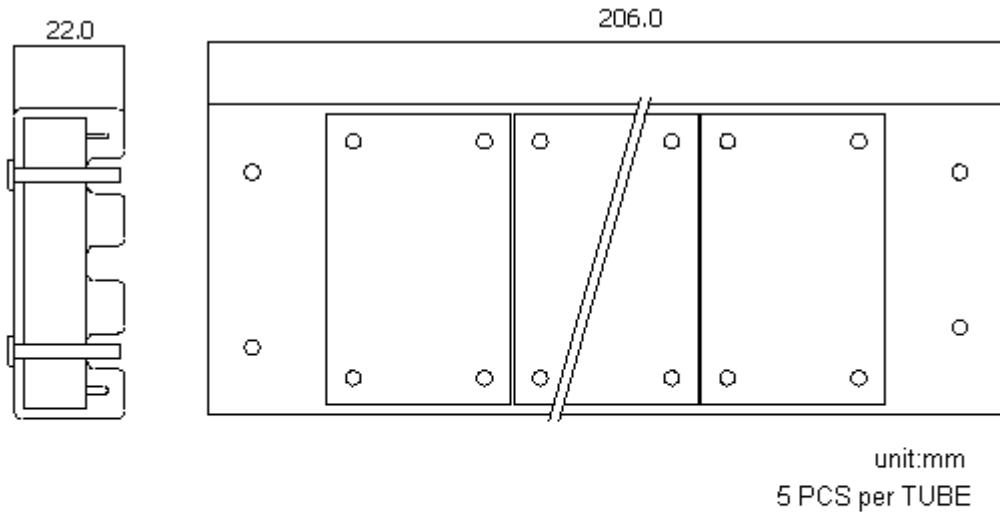

Soldering and Reflow Considerations

Lead free wave solder profile for ERM75 Series

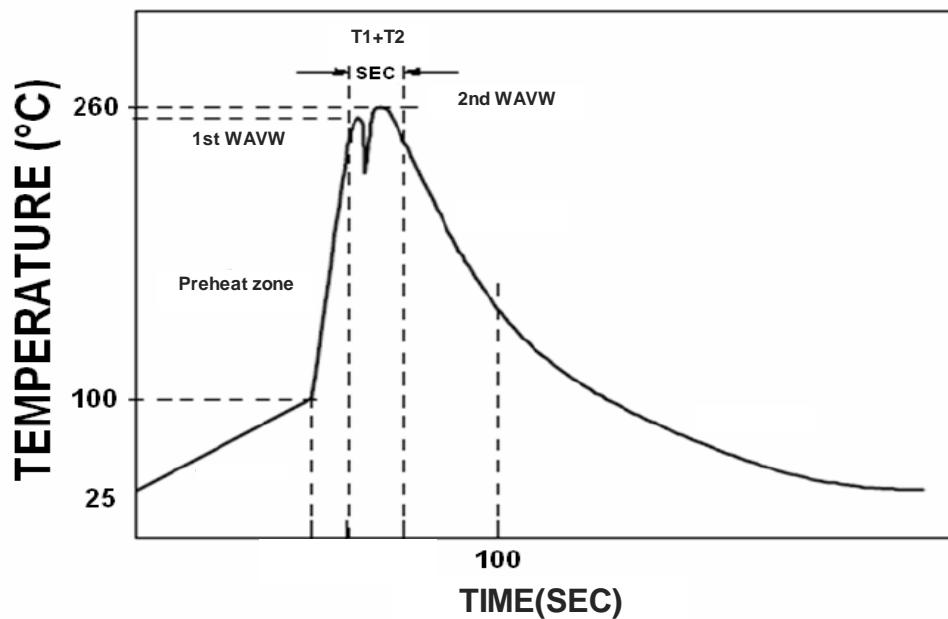

Weight

The ERM75 series weight is 0.13 lb. (61 grams) maximum.

Record of Revision and Changes

Issue	Date	Description	Originators
1.0	11.05.2013	First Issue	E. Wang
1.1	02.17.2014	Update the operating temperature description and OVP level	E. Wang
1.2	03.06.2014	Update input UVP specification	E. Wang
1.3	05.28.2014	Update EMI level	E. Wang
1.4	06.13.2014	Duncan update	E. Wang
1.5	09.23.2014	Duncan update	E. Wang
1.6	10.14.2014	Duncan update	E. Wang
1.7	03.29.2017	Update ripple & noise output capacitor value	E. Wang
1.8	02.08.2018	Update operating temperature	E. Wang

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices
Barberry House, 4 Harbour Buildings
Waterfront West, Brierley Hill
West Midlands, DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333



Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com